SAMSUNG

3 CD CHANGER
MINI MINI COMPONENT
MAX-900/920

SERVICE Manual

MICRO COMPONENT SYSTME

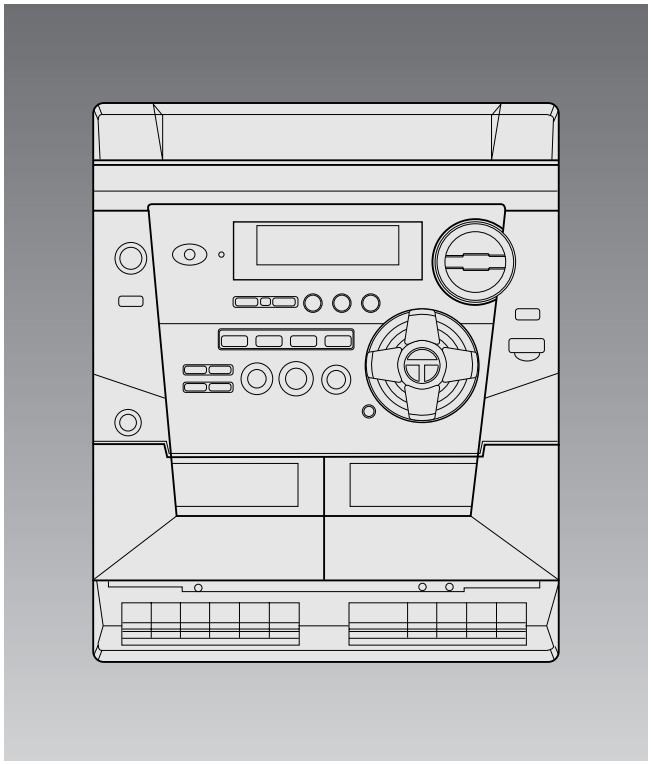

CONTENTS

1. Alignment and Adjustments
2. Exploded Views and Parts List
3. Electrical Parts List
4. Block Diagrams
5. PCB Diagrams
6. Wiring Diagram
7. Schematic Diagrams

ELECTRONICS

© Samsung Electronics Co.,Ltd. FEB. 1999
Printed in Korea
Code no. AH68-

1. Alignment and Adjustments

1-1 Tuner

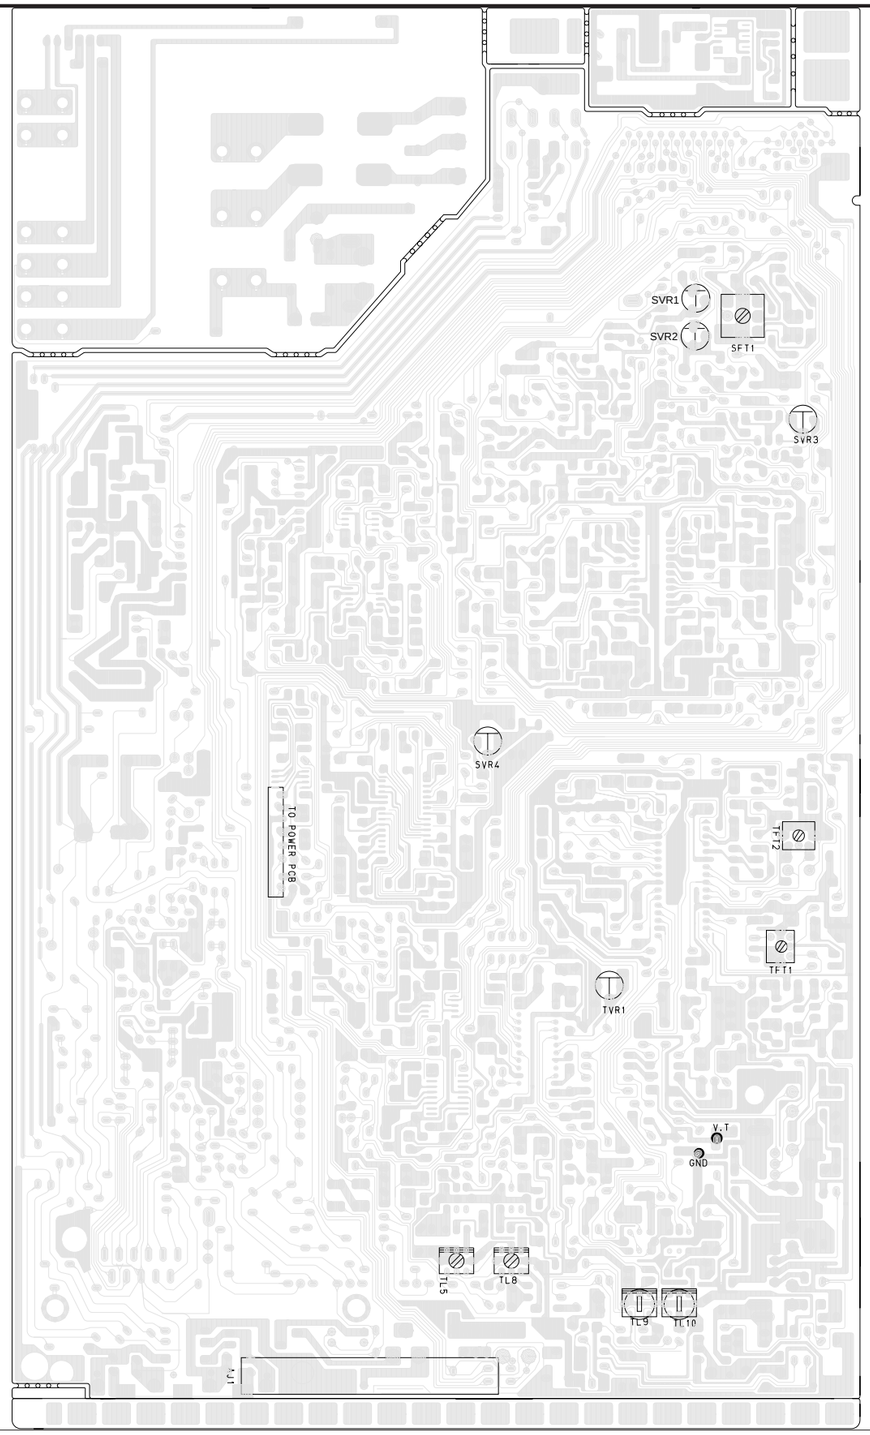

* When adjusting T.H.D., readjust I/F coil on the Tuner Pack.

FM THD Adjustment	
SSG FREQ.	98 MHz
Adjustment point (TFT2)	FM DETECTOR COIL
Output	60 dB
Minumum Distortion (0.3% below) (Figure 1-1)	

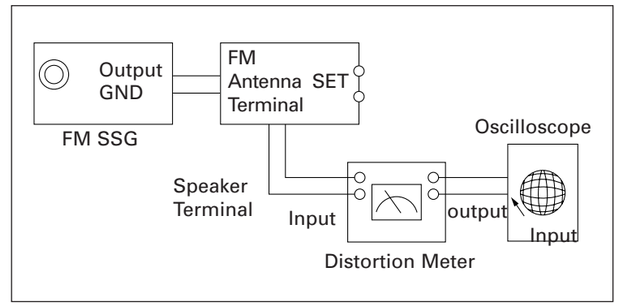

Figure1-1 IF CENTER and THD Adjustment

FM Search Level Adjustment	
SSG FREQ.	98 MHz
Adjustment point (TVR1)	BEACON SENSITIVITY SEMI-VR(20KΩ)
Output	1kHz 28dB
Adjust IVR1 so that “TUNED” of FLT is lighted (Figure 1-2)	
4Gain : 20dB(CE standard)	

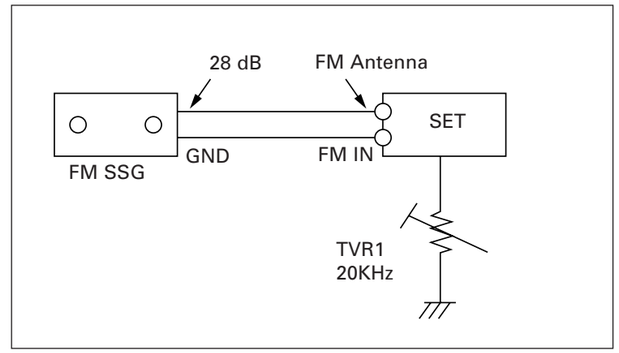

Figure1-2 FM Auto Search Level Adjustment

AM(MW) I.F Adjustment	
SSG FREQ.	450 kHz
Frequency	522 kHz
Adjustment point (TFT1)	AM I.F COIL
Maximum output (Figure 1-3)	

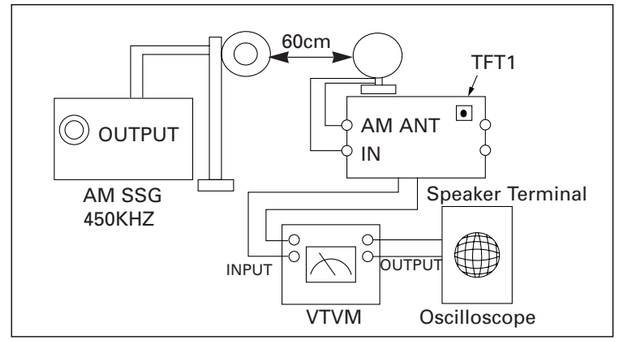

Figure1-3 AM I.F Adjustment

1-2 Cassette Deck

1-2-1 To Adjust Tape Speed

Notes
* Measuring tape: i) MTT-111 CN(or equivalent)
(Tapes recorded with 3kHz)
ii) MTT-5512 (or equivalent)

- Adjust SPEED Control

Step	Item	Tape	Pre-Setup	Adjust Point	Standard	Figure	Remark
1	SPEED Control	MTT-111N (3KHZ)	Press play button after puting tape into the Deck1	SVR3	3 kHZ ±1%	Fig. 1-4	A&B Deck deviation : 60Hz
2	HI SPEED Control	MTT-111 (3KHZ)	Press play button after puting tape into the Deck1	No Adjustment	-	Fig. 1-4	5200~6600Hz Check

- Adjust Record Frequency

Step	Item	Tape	Pre-Setup	Adjust Point	Frequency Range	Figure	Remark
1	L,R Unbalance	MTT-112B (1KHZ)	Press Rec button after connecting (Fig1-5)	SVR4	±5dB	Fig. 1-5	SPEAKER VTVM (A-DECK)
2	Record Frequency	MTT-5512	Press Rec button after connecting (Fig1-5)	SFT1	60KHZ±1KHZ(MAX900) 85KHZ±1KHZ(MAX920)	Fig. 1-5	SP2

- Adjust Azimuth

Step	Item	Tape	Pre-Setup	Adjust Point	Standard	Figure	Remark
1	Azimuth	MTT-111CN	Press Play button after puting tape into the Deck1	Adjustment screw of HEAD	8KHZ	Fig.1-4 Fig. 1-6	Output:Maximum

- Adjust Rec Bias Voltage(Only MAX920 Model)

Step	Item	Tape	Pre-Setup	Adjust Point	Votage Range	Remark
1	Rec Bias Voltage	MTT-5512 (3KHZ)	Press Rec button after puting tape into the Deck1	SVR1 SVR2	7V±0.5V	Connete to MWF6 from AC Meter.

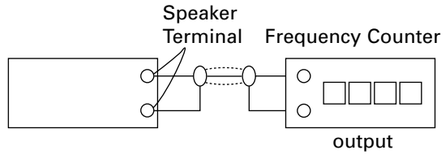

Figure 1-4

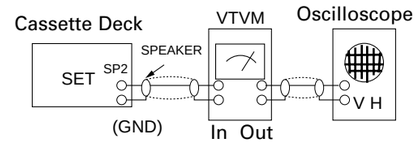

Figure 1-5



Figure 1-6

2.Exploded Views and Parts List

2-1 SAMSUNG Cassette Deck Exploded View and Parts List: Only MAX920(Logic Deck)

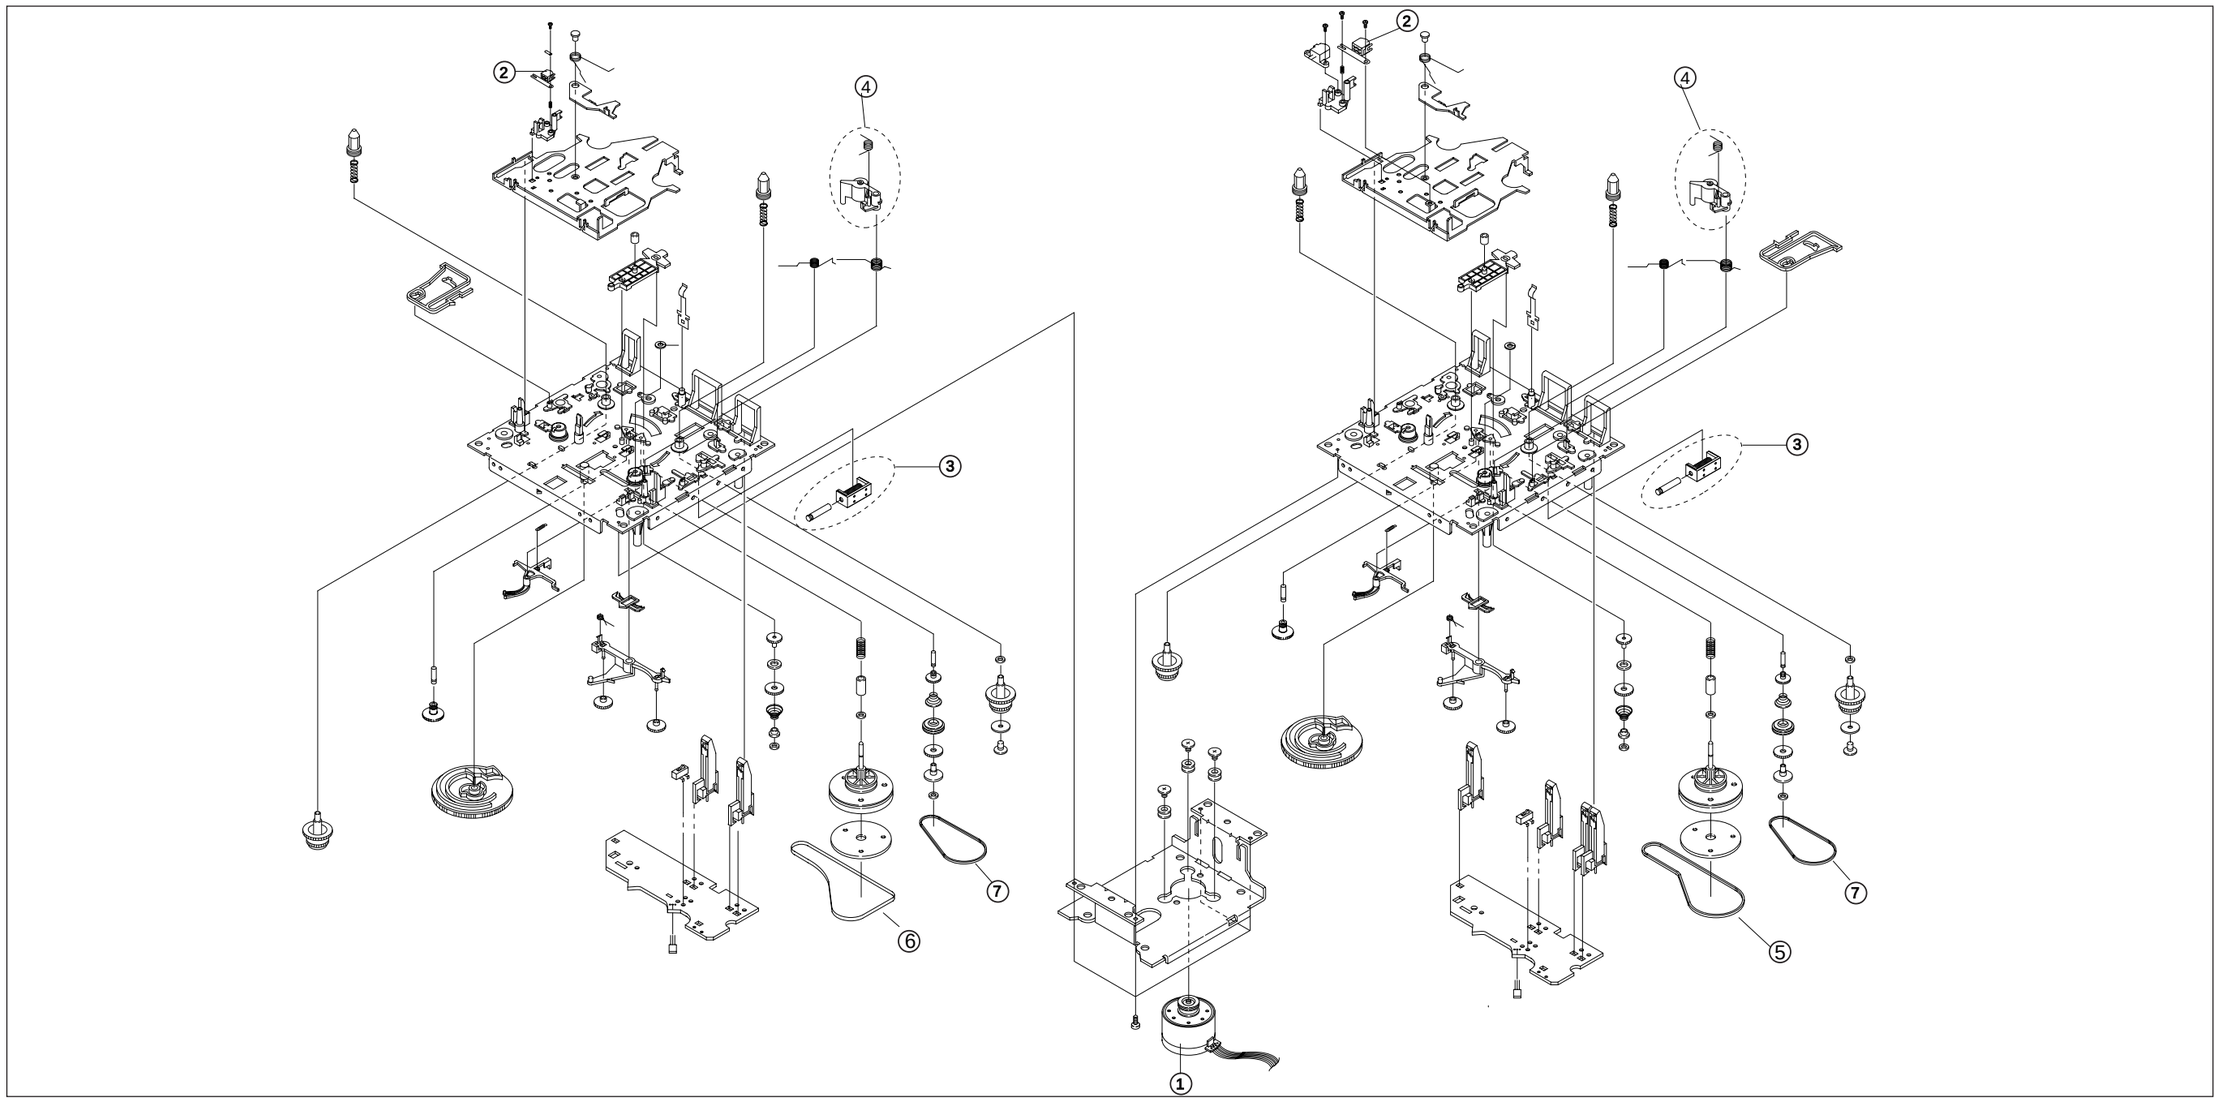

No.	Code No.	Description	Specification	Remarks
	AH59-20005U	DECK-CASSETTE	ADR2113SW3	
1	AH81-11052G	MOTOR ASS'Y	EG530YD2BH	
2	AH81-10022E	HEAD ASS'Y(P/B)	MS15RAA2N1	
3	AH81-10798V	SOLENOID ASS'Y	ADR2100-10(24Ω)	
4	AH81-10798K	PINCH ARM(F)	ADR2100-06	
5	AH81-10798Q	MAIN BELT(R/P)	ADR2113MW-02	
6	AH81-10798T	MAIN BELT(P/B)	ADR2113MW-03	
7	AH81-10798U	SUB BELT	ADR2100-09	

2-2 Samsung Cassette Deck Exploded View and Parts List : Only MAX900(Auto Stop)

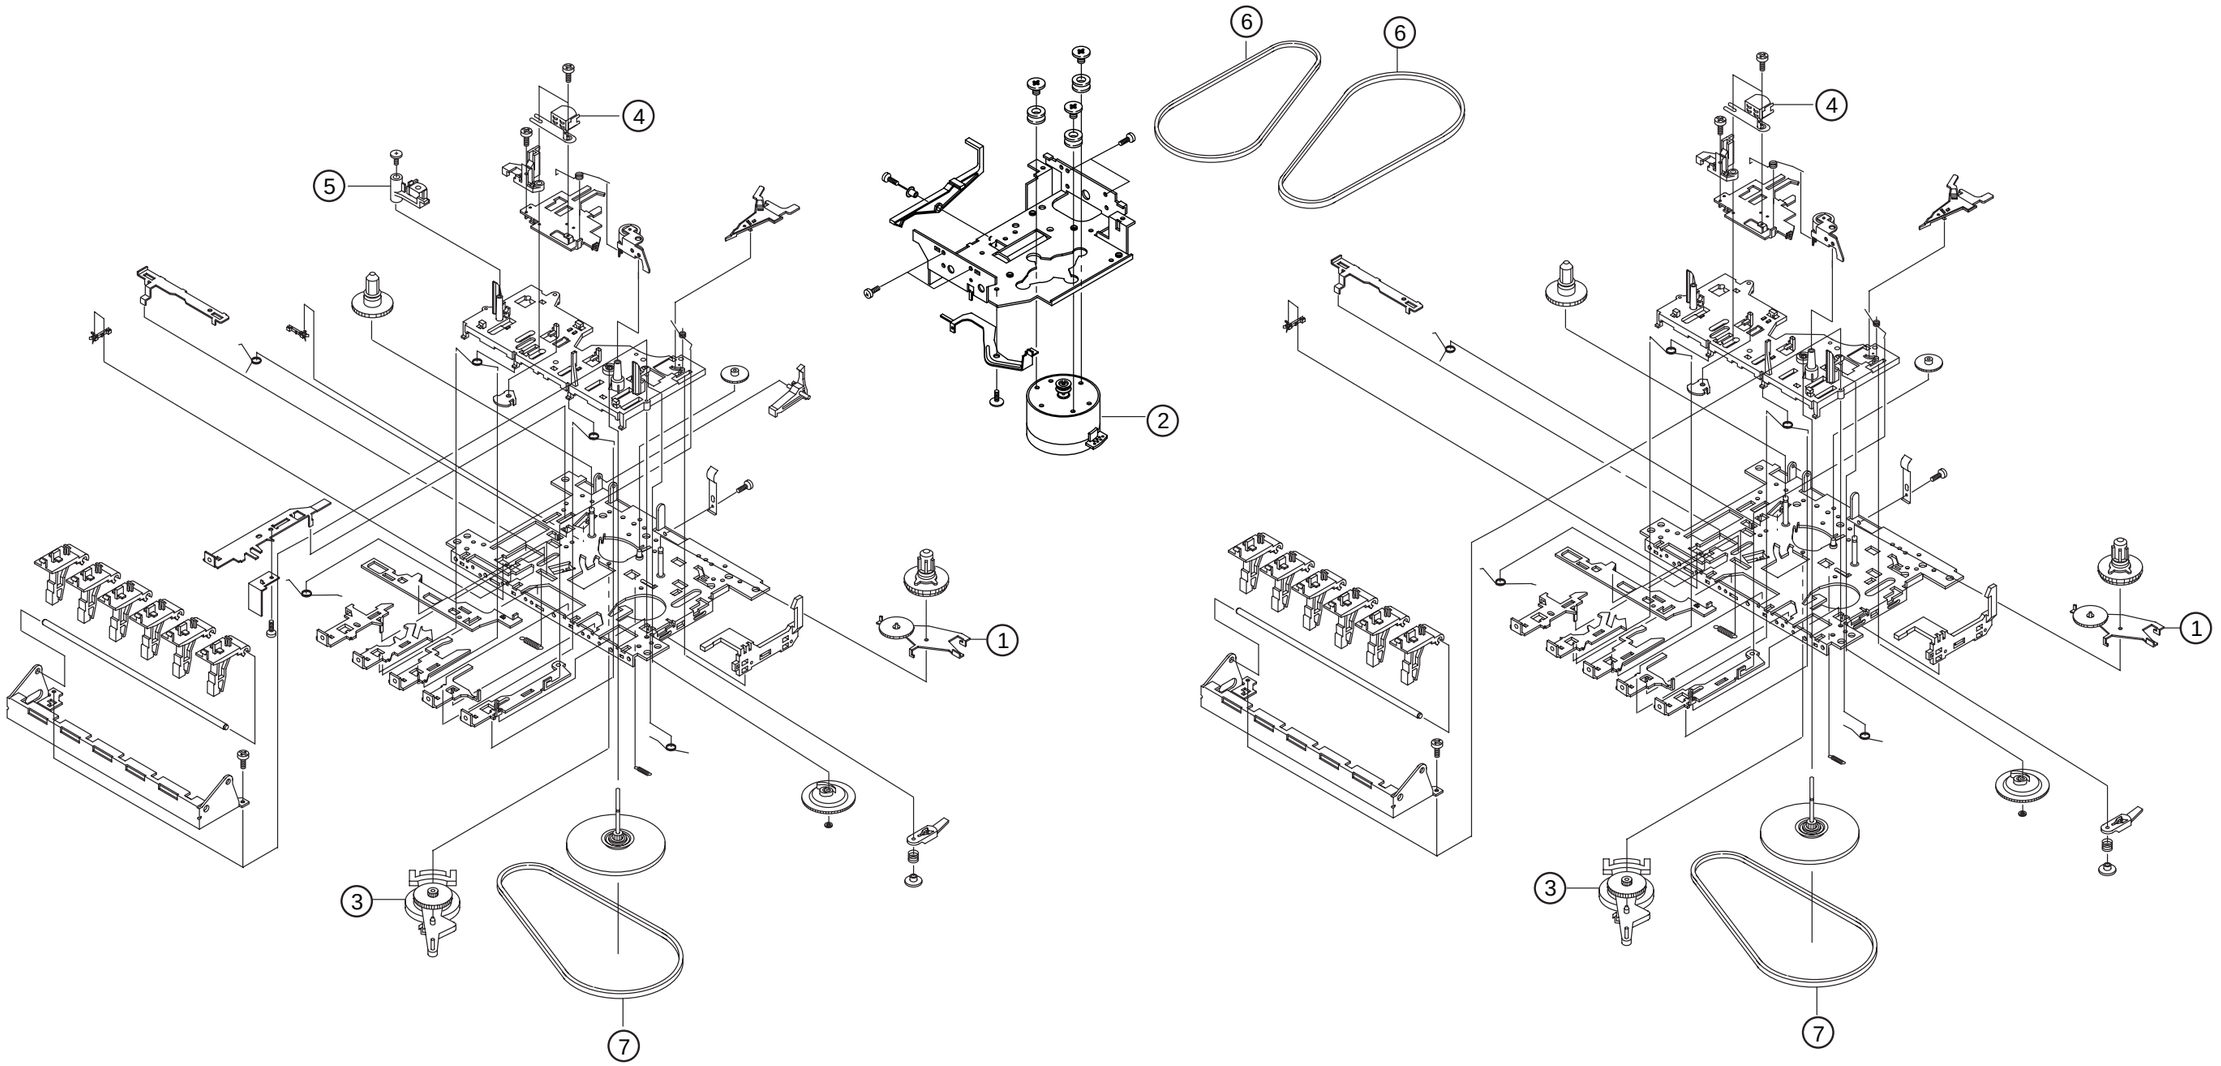

No.	Code No.	Description	Specification	Remarks
	AH59-20005K	DECK-CASSETTE	ADR2006FW2	
1	AH81-10025E	IDLER ARM ASS'Y	ADR02-042	
2	AH81-11037Q	MOTOR	EG530YD2BH	
3	AH81-10025J	FR ARM ASS'Y	ADR22-012	
4	AH81-11150W	R/P HEAD	TC-591	
5	AH81-11150X	ERASE HEAD	TC-230AN	
6	AH81-10026L	BELT MAIN	59.7 PI X 1.0T	
7	AH81-10026H	BELT SUB	34.7 PI X 1.0T	

2-3 Yanion Cassette Deck Exploded View and Parts List : Only MAX900(Auto Stop)

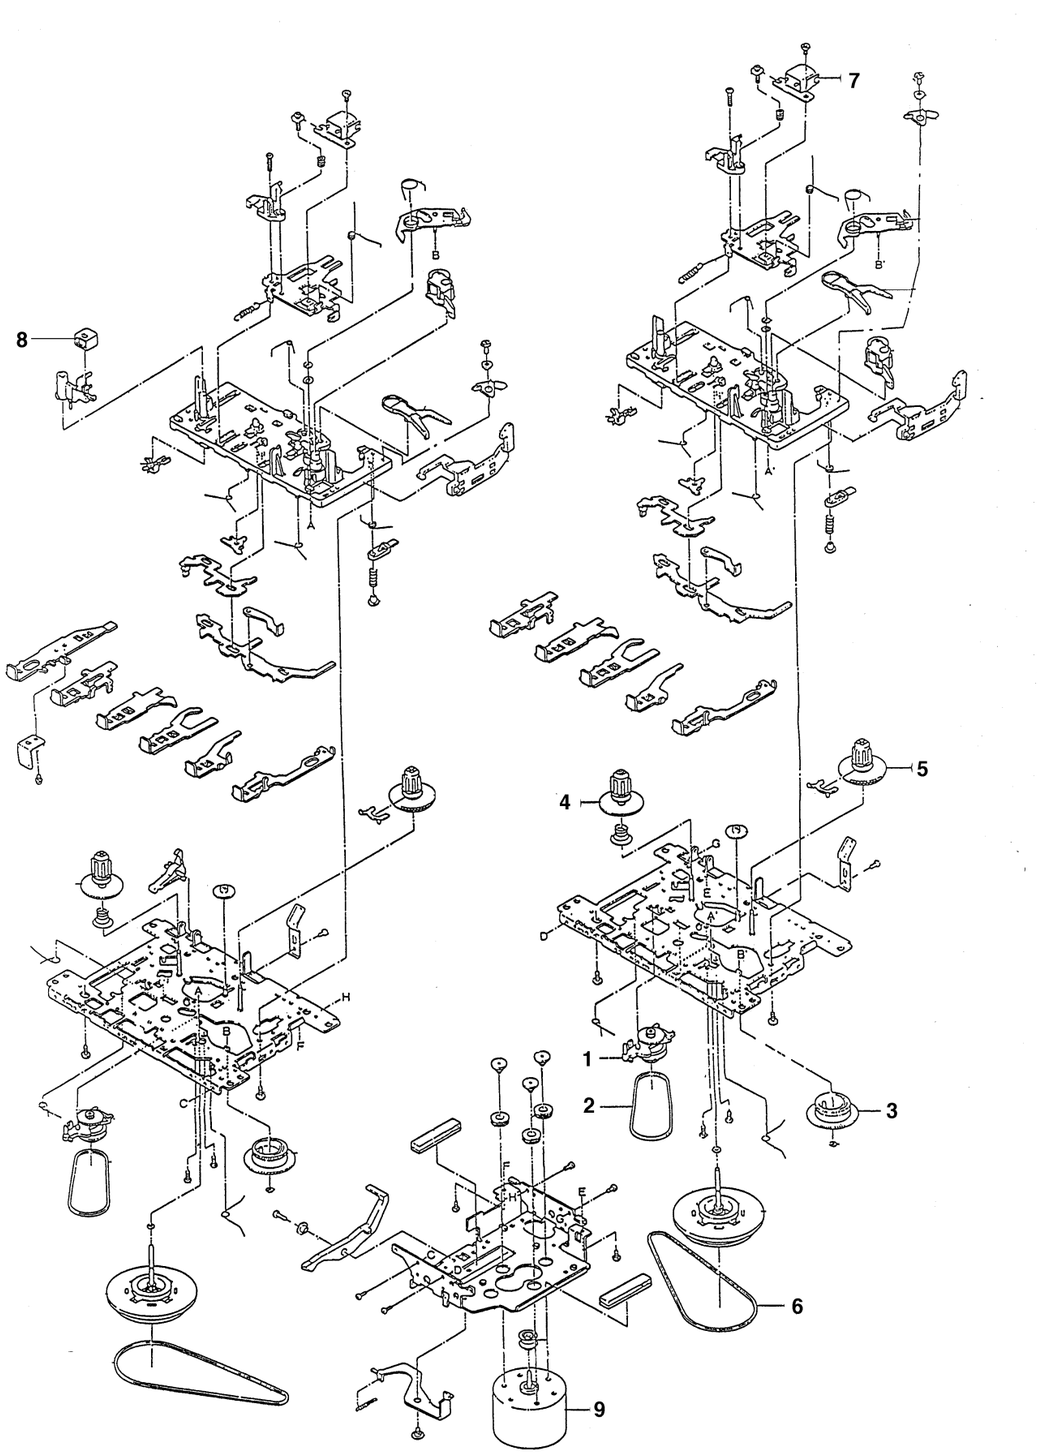

No.	Code No.	Description	Specification	Remarks
	AH59-20005X	DECK-CASSETTE	YN21ZSW-77	
1	AH81-11037D	R.F PULLEY ASS'Y	8521-200090-300	
2	AH81-11154D	BELT SUB	6600-090014-001	
3	AH81-11037H	CAM GEAR	6021-200802-001	
4	AH81-11037J	S REEL ASS'Y	8521-200080-300	
5	AH81-11037K	T REEL ASS'Y	8521-200070-300	
6	AH81-11154E	BELT MAIN	6600-090020-001	
7	AH81-11150W	R/P HEAD	TC-591	
8	AH81-11150X	ERASE HEAD	TC-230AN	
9	AH81-11037Q	MOTOR	EG530YD2BH	

2-4 Yanion Cassette Deck Exploded View and Parts List : Only MAX900(Auto Reverse)

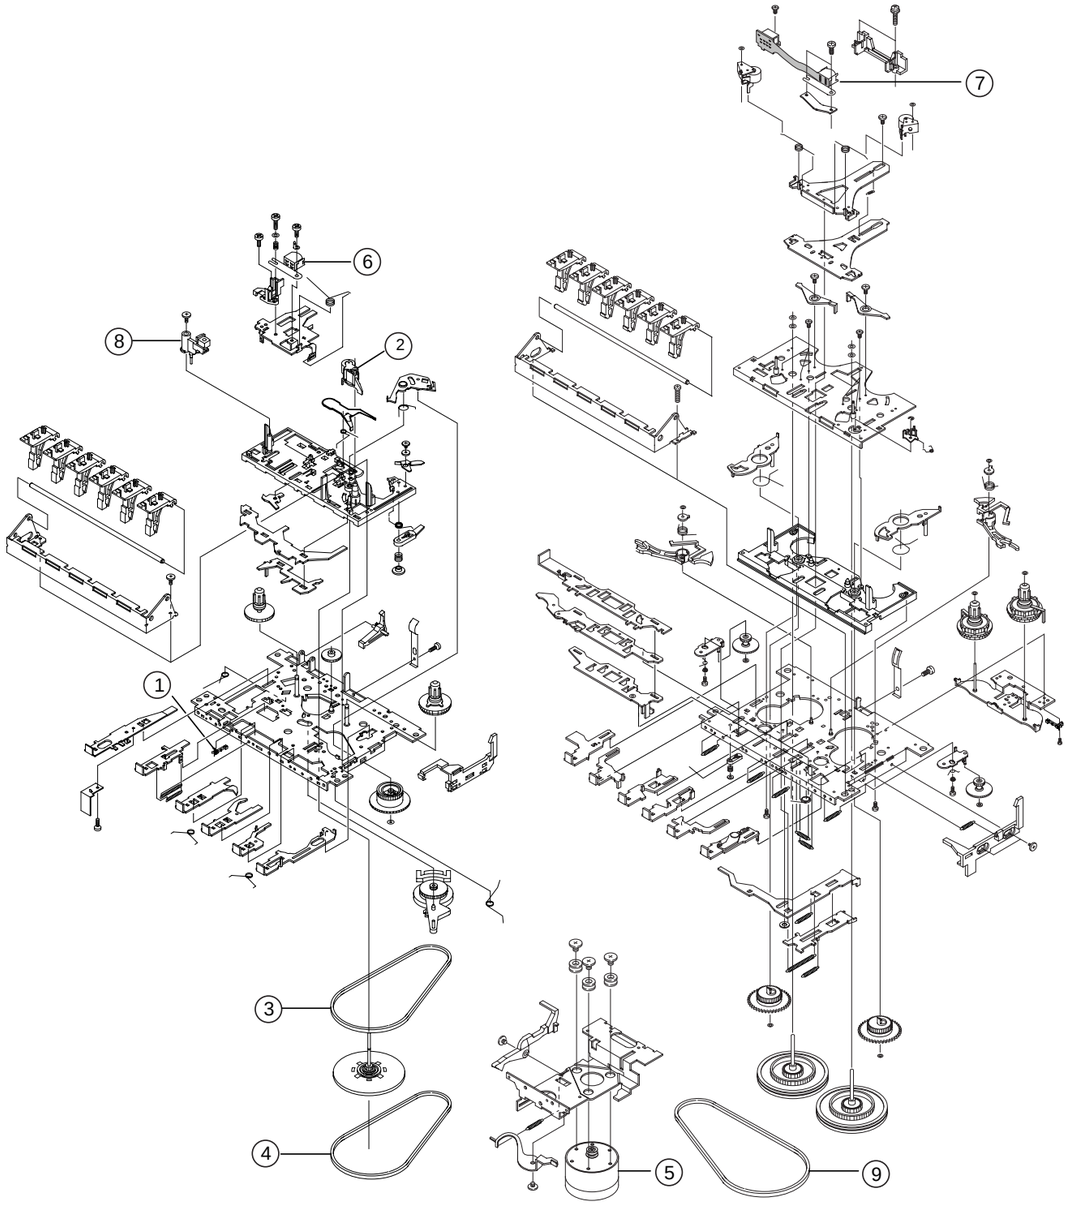

No.	Code No.	Description	Specification	Remarks
	AH59-20004E	TAPE DECK ASS'Y	YN921ZSW-41	
1	AH81-10005W	LEAF SWITCH	MSW-1541T	
2	AH81-10005Z	PINCH ROLLER ARM ASS'Y	1921-04-301	
3	AH81-10006C	RF BLET	1921-07-03	
4	AH81-10006R	MAIN BELT	1821-12-173	
5	AH81-11037Q	MOTOR	EG530YD2B	
6	AH81-10022E	R/P HEAD	MS15R-AA2N1	
7	AH81-10022H	P/B HEAD	MR359-KF243	
8	AH81-10022T	E-HEAD	PHK380-MS16A	
9	AH81-10023W	MAIN BELT	1821-17-03	

2-5 Total Exploded View and Parts List

2-5-1 MAX900 Exploded View

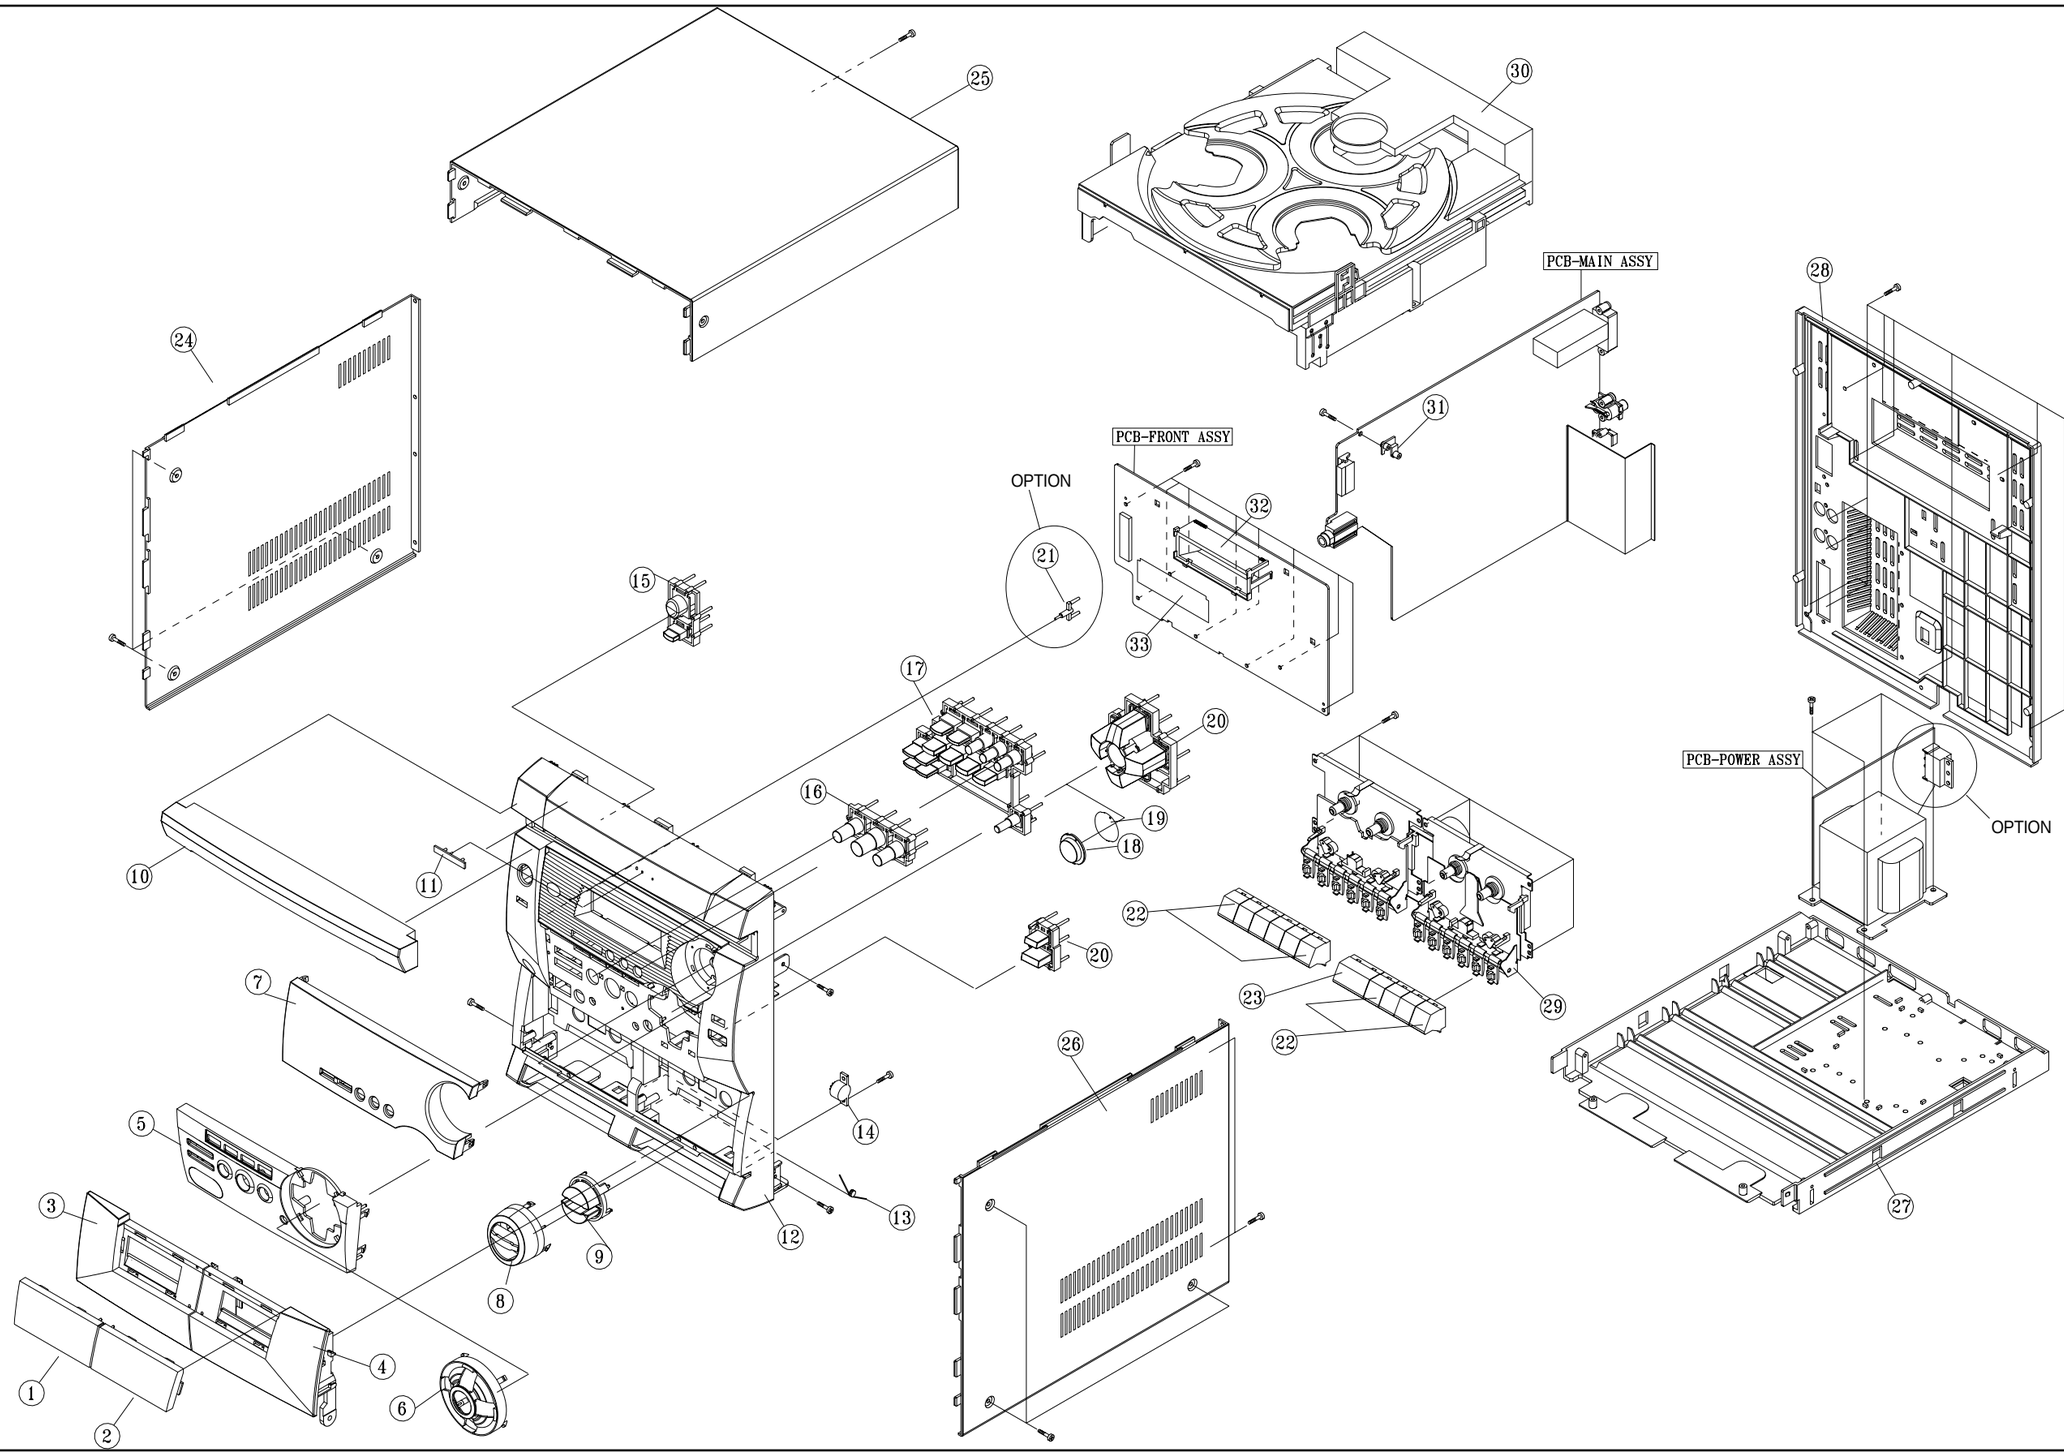

2-5-2 MAX900 Parts List

No.	Code No.	Description	Specification	Remarks
1	AH64-40471A	WINDOW-DOOR,A	PMMA SMOKE	
2	AH64-40472A	WINDOW-DOOR,B	PMMA SMOKE	
3	AH64-50357B	DOOR-CASS,A	ABS GRAY	
4	AH64-50358B	DOOR-CASS,B	ABS GRAY	
5	AH64-40467B	DECORATION-FRONT	ABS D/GRAY	
6	AH64-40468B	DECORATION-EQ	ABS L/GRAY	
7	AH64-40470B	WINDOW-LCD	PMMA SMOKE	
8	AH64-40469A	DECORATION-VOLUME	ABS D/GRAY	
9	AH64-11335A	KNOB-VOLUME	ABS D/GRAY	
10	AH64-50359B	DOOR-TRAY	ABS GRAY	
11	AH64-70003H	BADGE-BRAND	30mm	
12	AH64-30449B	CABINET-FRONT	MIPS GRAY	
13	AH61-00013A	SPRING-EJECT	SUS Φ1.0	
14	AH61-80030A	DAMPER-ASSY	POM	
15	AH64-11337B	KNOB-POWER	ABS L/GRAY	
16	AH64-11342B	KNOB-DIRECTION	ABS NAT.	
17	AH64-11338B	KNOB-FUNCTION	ABS M/GRAY	
18	AH67-10192B	LENS-EQ	PMMA CLEAR	
19	AH67-40043A	FILTER-TURBO	PC 0.16T	
20	AH64-11334B	KNOB-EQ	ABS WHT	
21	AH67-10168A	LENS-JOG	PMMA SMOKE	Option RDS
22	AH64-11340A	KNOB-CASS,S	ABS M/GRAY	
23	AH64-11341A	KNOB-CASS,L	ABS M/GRAY	
24	AH64-30444A	CABINET-SIDE,L	MIPS GRAY	
25	AH64-30443A	CABINET-TOP	MIPS GRAY	
26	AH64-30446A	CABINET-SIDE,R	MIPS GRAY	
27	AH64-30442A	CABINET-BOTTOM	MIPS GRAY	
28	AH64-30450B	CABINET-REAR	MIPS GRAY	
29	AH59-20005X	DECK-CASSETTE		
30	G3VI	3CD-MECHA	MECHA ASSY	
31	AH61-00021A	SUPPORT-PCB	ABS BLK	
32	AH61-20550A	HOLDER-LCD	PC+ABS WHT	
33	AH67-40044A	FILTER-LCD	PC 0.5T	

2-5-3 MAX920 Parts List

No.	Code No.	Description	Specification	Remarks
1	AH64-40457B	WINDOW-CD	PMMA 850-71129	EXP-BASIC
	AH64-40457C	WINDOW-CD	PMMA 850-71129	RDS
	AH64-40457D	WINDOW-CD	PMMA 850-71129	GOODMANS
2	AH64-70003H	BADGE-BRAND	AL	SAMSUNG
3	AH64-50353B	DOOR-CD	ABS L/GRAY(G6236)	ALL COMMON
	AH64-50353C	DOOR-CD	ABS L/GRAY(G6236)	GOODMANS
4	AH64-40458D	WINDOW-DOOR,CD	PMMA 850-71129	EXP-BASIC
	AH64-40458P	WINDOW-DOOR,CD	PMMA 850-71129	GOODMANS
5	AH67-40036A	FILTER-VFD	PC 0.3T BLK	ALL COMMON
6	AH64-40459A	WINDOW-VFD	PMMA 850-41802	ALL COMMON
7	AH61-20535F	CAP-FRONT,E	MIPS D/GRAY	SURROUND
	AH61-20535G	CAP-FRONT,E	MIPS D/GRAY	RDS, SURROUND
	AH61-20535H	CAP-FRONT,E	MIPS D/GRAY	RDS, SRS
	AH61-20535J	CAP-FRONT,E	MIPS D/GRAY	GOODMANS
	AH61-20536D	CAP-FRONT,D		MIC, SURROUND
	AH61-20536E	CAP-FRONT,D		MIC, SRS
8	AH64-11321B	KNOB-VOLUME	L/GRAY(G6236)	ALL COMMON
9	AH61-20538B	CAP-JOG	ABS NATURAL	ALL COMMON
10	AH64-40462A	DECO-JOG	ABS 94HB BLK	ALL COMMON
11	AH61-20537B	CAP-TIMER	ABS NATURAL	ALL COMMON
12	AH64-11317B	KNOB-TIMER	ABS NATURAL	ALL COMMON
13	AH64-40460A	WINDOW-DOOR,A	PMMA 850-71129	ALL COMMON
14	AH64-40461A	WINDOW-DOOR,B	PMMA 850-71129	ALL COMMON
15	AH64-50351B	DOOR-CASS.A	ABS L/GRAY(G6236)	ALL COMMON
	AH64-50351D	DOOR-CASS.A	ABS L/GRAY(G6236)	GOODMANS
16	AH64-50352C	DOOR-CASS.B	ABS L/GRAY(G6236)	HIGH SPEED DUBBING
	AH64-50352E	DOOR-CASS.B	ABS L/GRAY(G6236)	GOODMANS
17	AH61-62004A	SPRING-EJECT,A	STS •'1.1	ALL COMMON
18	AH61-62005A	SPRING-EJECT,B	STS •'1.1	ALL COMMON
19	AH64-30441B	CABINET-FRONT	MIPS L/GRAY(G6236)	ALL COMMON
	AH64-30441D	CABINET-FRONT	MIPS L/GRAY(G6236)	GOODMANS
20	AH61-80030A	ASS'Y DAMPER	POM	ALL COMMON
21	AH95-500011A	ASS'Y LATCH		ALL COMMON
22	AH67-10187A	LENS-REC	PMMA MILKY	ALL COMMON
23	AH64-11318A	KNOB-DUBBING	ABS D/GRAY(G3174)	ALL COMMON
24	AH67-10184B	LENS-TURBO	ACRYL CLR	ALL COMMON
25	AH67-40038A	FILTER-TURBO	KIMO 100	ALL COMMON
26	AH61-20543A	HOLDER-TURBO	ABS WHT	ALL COMMON
27	AH64-11320B	KNOB-FUNTION	L/GRAY(G6236)	ALL COMMON
	AH64-11320C	KNOB-FUNTION	L/GRAY(G6236)	GOODMANS
28	AH64-11315A	KNOB-DISC	L/GRAY(G3174)	ALL COMMON
29	AH64-11319A	KNOB-DEMO	D/GRAY(G3174)	ALL COMMON
30	AH64-11316B	KNOB-POWER	L/GRAY(G6236)	ALL COMMON
31	AH61-00021A	SUPPORT-PCB	ABS 94HB BLK	
32	AH64-11214C	KNOB-MIC	ABS D/GRAY(G3174)	BUYER OPTION
35	AH64-30444A	CABINET-SIDE,L	MIPS M/GRAY	
36	AH64-30445A	CABINET-SIDE,R	MIPS M/GRAY	
37	AH64-30416A	CABINET-BOTTOM	SECC 1.0T	ALL COMMON
38	AH64-30450B	CABINET-REAR	MIPS M/GRAY	BASIC (=DOM, EXP-BASIC)
	AH64-30450C		MIPS M/GRAY	BASIC + DIGITAL OUT
	AH64-30450D		MIPS M/GRAY	BASIC + SURROUND
	AH64-30450E		MIPS M/GRAY	BASIC (=DOM, EXP-BASIC)
39	AH64-30443A	CABINET-TOP	MIPS M/GRAY	

2-5-4 MAX920 Exploded View

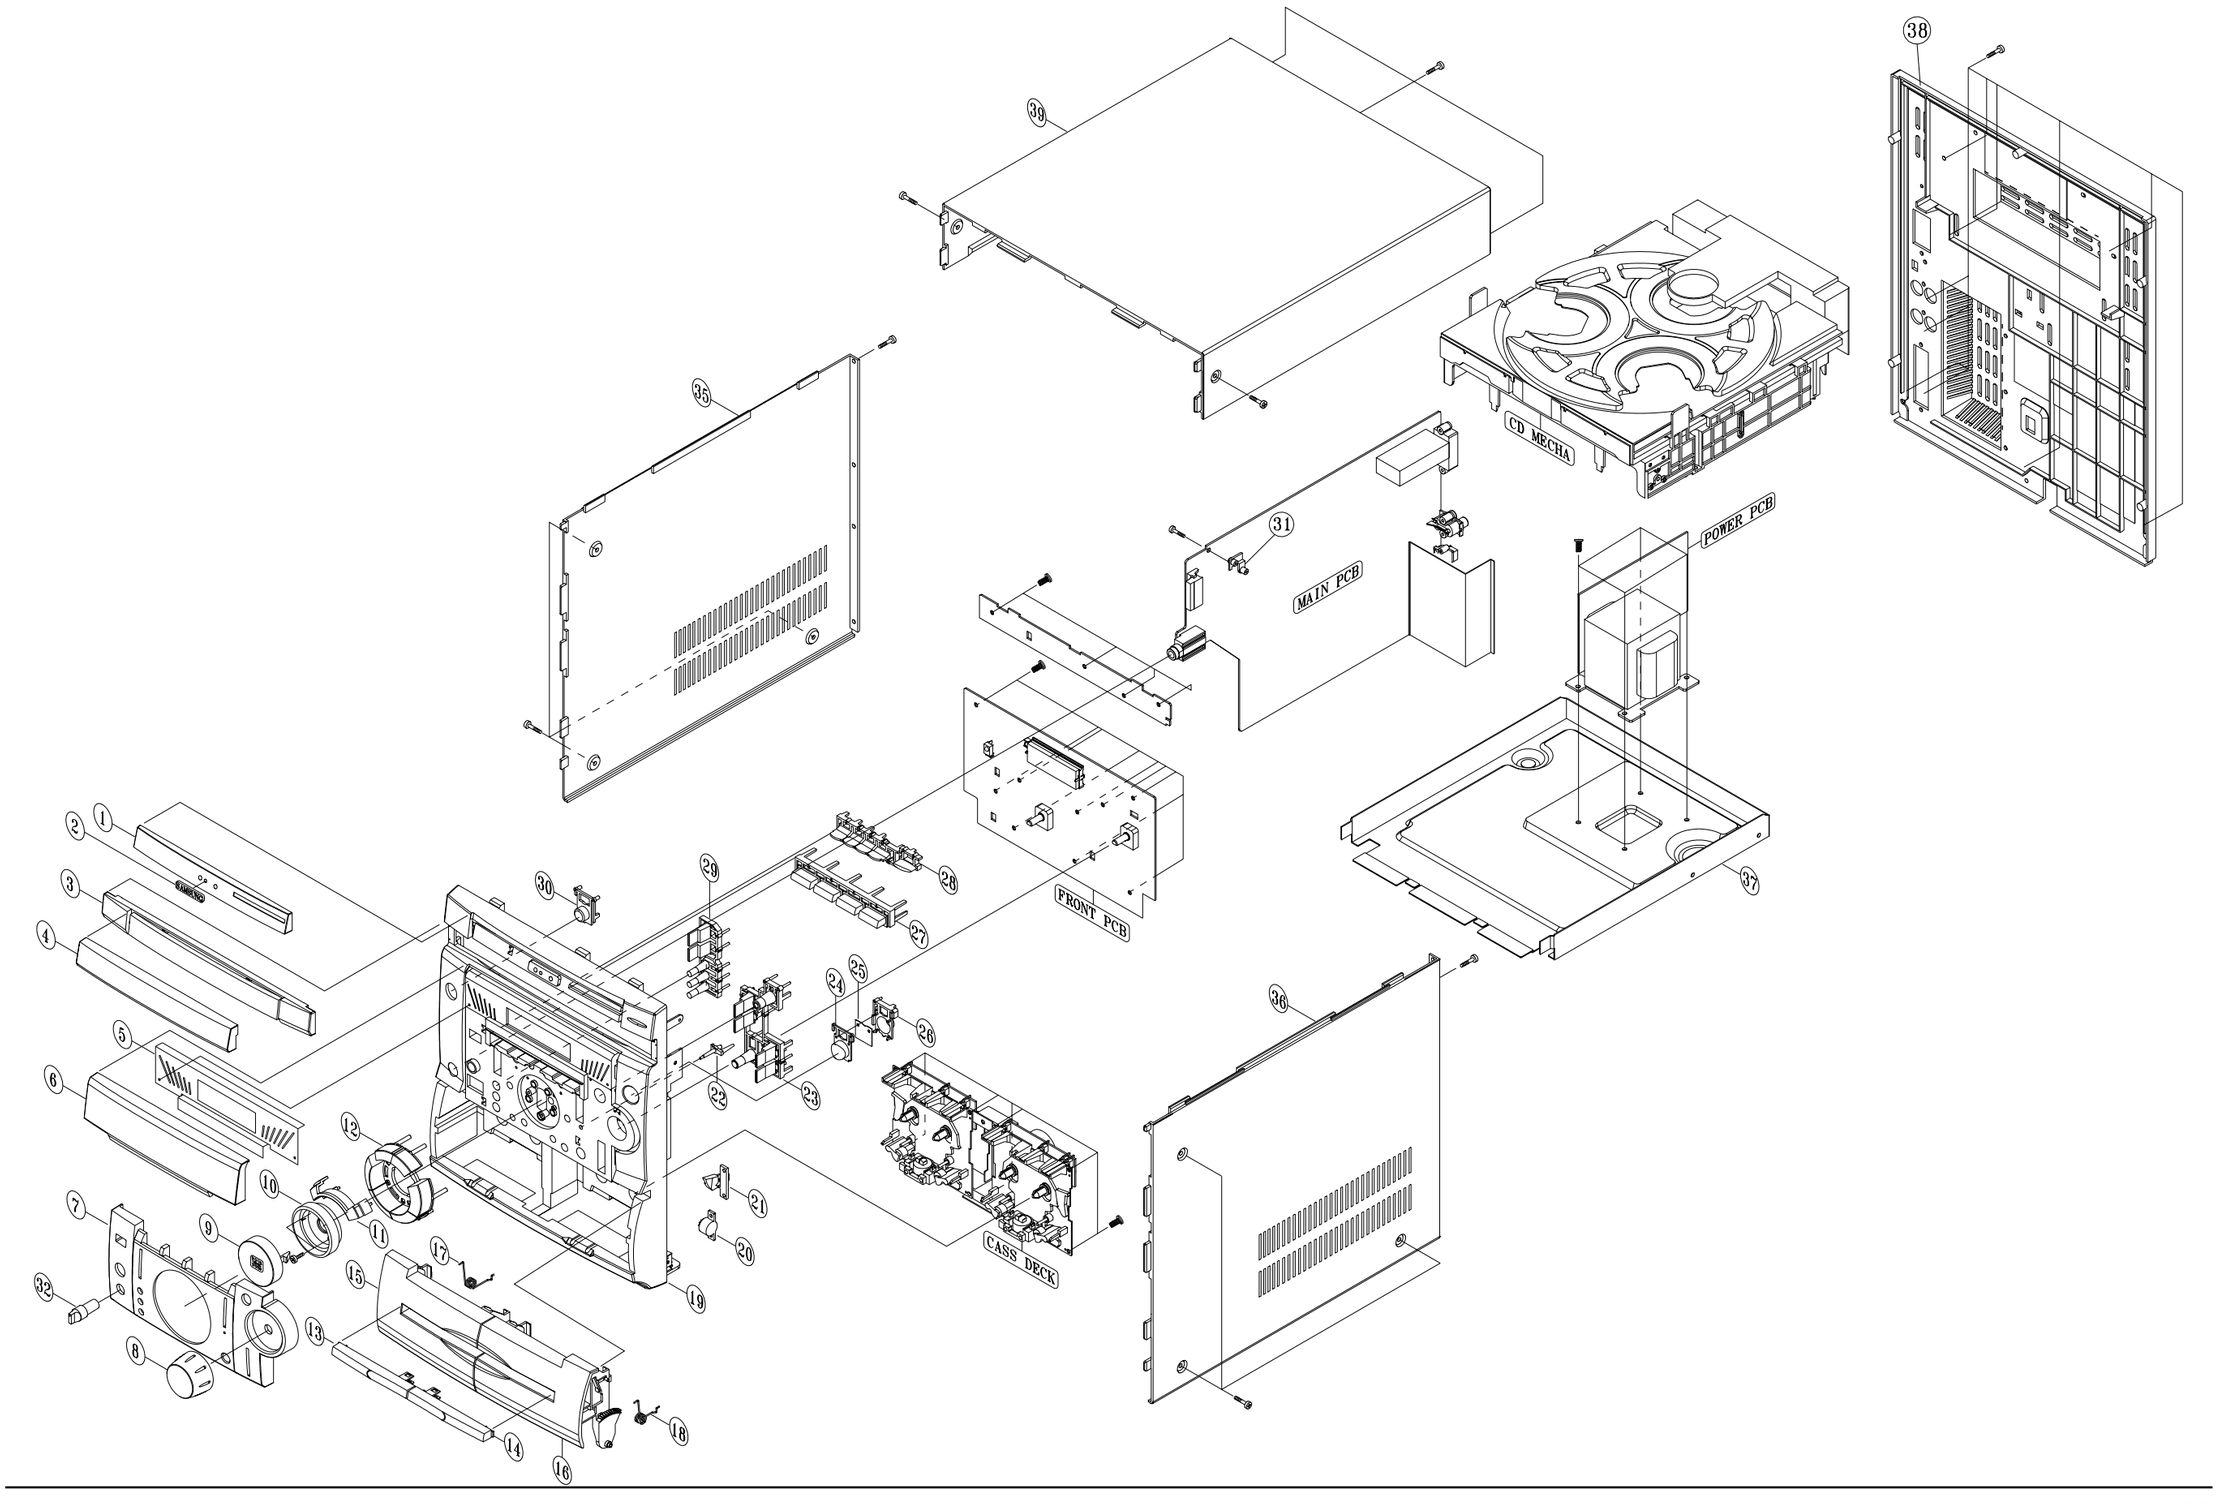

2-6 CD Deck Exploded View and Parts list(COMMON)

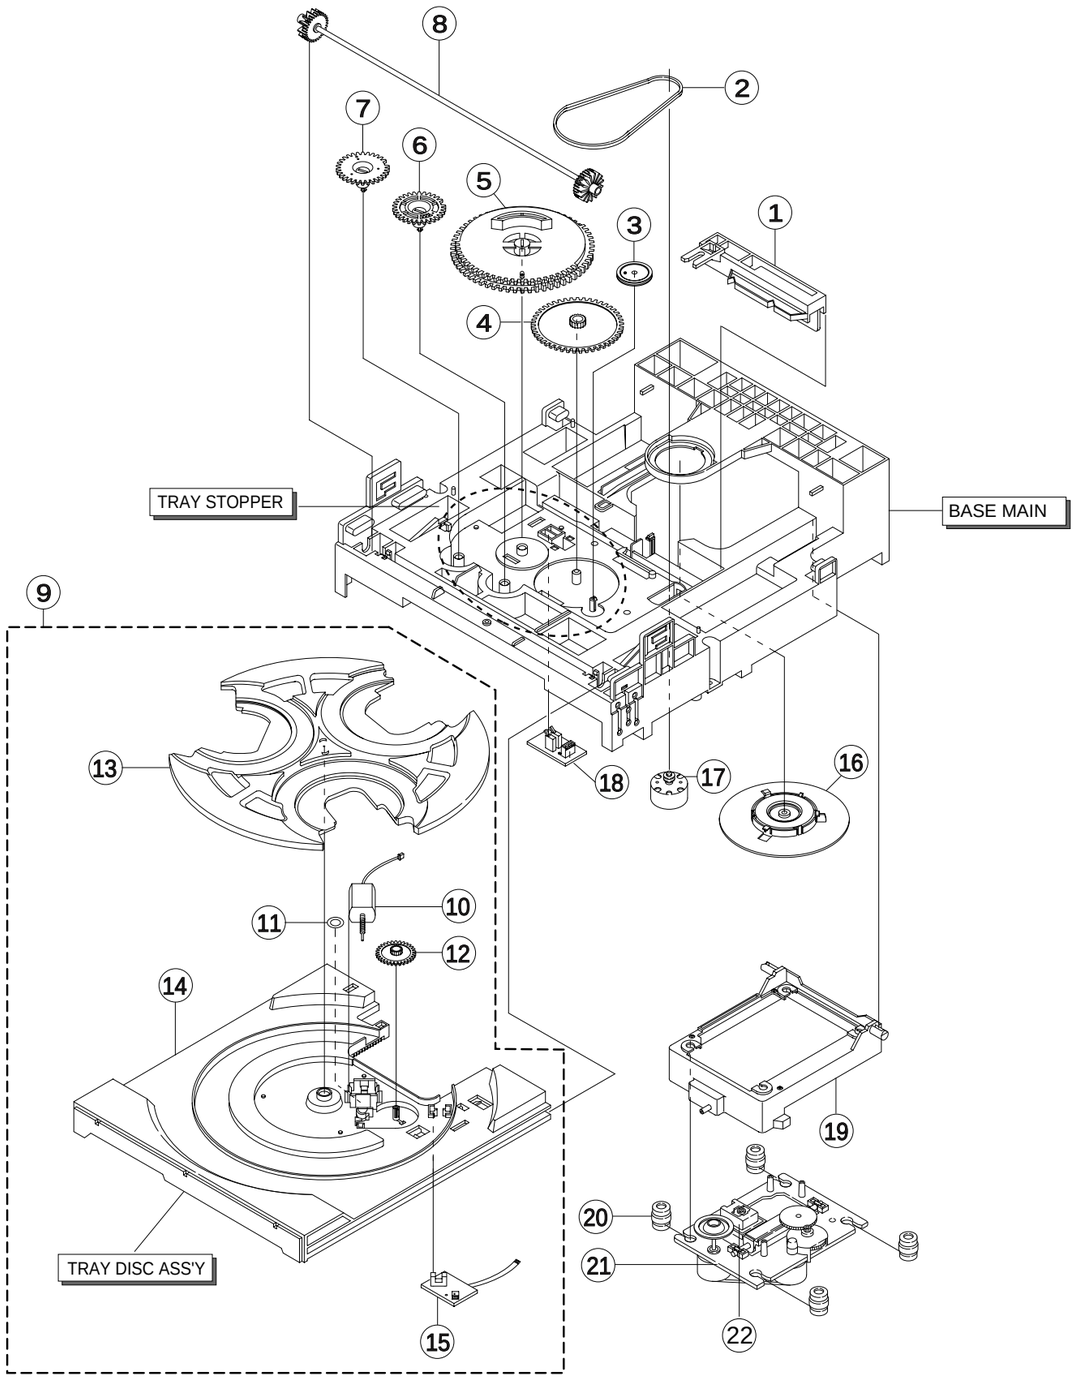

No.	Code No.	Description	Specification	Remarks
1	AH66-80022A	SLIDER-CAM	ABS HF-380 NTR	
2	AH66-60034A	BELT-LOAD	CR	
3	AH66-20186A	GEAR-PULLEY	POM (M90-44) WHT	
4	AH66-20187A	GEAR-LOAD	POM (M90-44) BLK	
5	AH66-20188A	GEAR-CAM	POM (M90-44) WHT	
6	AH66-20189A	GEAR-TRAY	POM (M90-44) BLK	
7	AH66-20190A	GEAR-CONVERT	POM (M90-44) WHT	
8	AH66-20191A	GEAR-SYNCRO	ABS HF-380 NTR	
9	AH59-10097A	ASSY-TRAY DISC	CMS-300,ASS'Y-TRAY	
10	AH59-10098A	ASSY-WORM -MOTOR	CMS-300,ASS'Y-WORM	
11	AH69-20044A	CUSHION-MOTOR	NBR BLK	
12	AH66-20193A	GEAR-ROULETTE	POM (M90-44) BLK	
13	AH66-90056A	TRAY-ROULETTE	ABS XR-401 BLK	
14	AH66-90055A	TRAY-DISC	-,ABS,-,BLK	
15	AH59-10099A	ASSY-PCB SENSOR	CMS-300,ASS'Y SENSOR	
16	AH59-10100A	ASSY-TABLE CHUCK	CMS-300,ASS'Y CHUCK	
17	AH59-10101A	ASSY-PULLEY-MOTOR	CMS-300,ASS'Y CHUCK	
19	AH66-30098A	LEVER-LIFTER	ABS BLK CMS-300	
20	AH73-10035A	RUBBER-CD RED	SI, CMS-300,40,RED	
	AH73-10034A	RUBBER-CD GREEN	SI, CMS-300,40,GREEN	
21	AH91-60150A	DECK-CDP	CMS-D515G6(U)	
22	AH30-00003A	PICK-UP	SOH-AA,D51SG6(WITH DUST COVER)	

2-7 SPEAKER Exploded View and Parts list(COMMON)

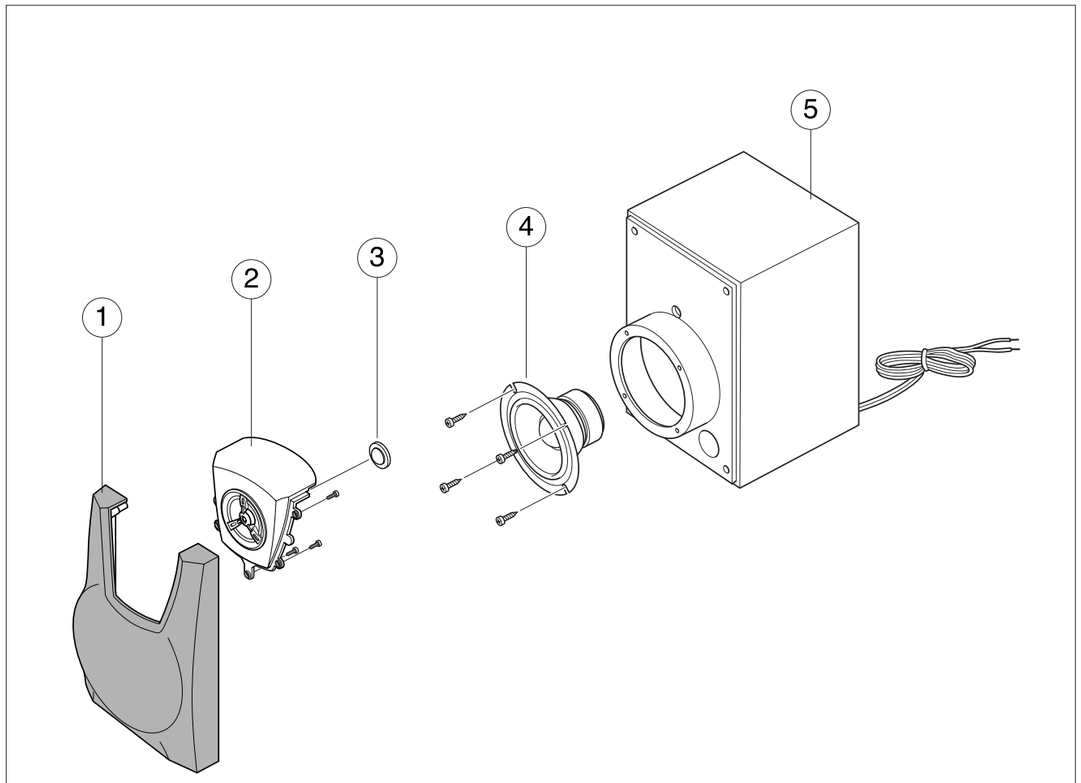

* PS920 : ASS'Y SPEAKER(AH81-00078A)

No.	Description	Specification	Code No.	Q'TY
1	NET	HIPS BLK	AH81-00078E	1
2	PANEL FRONT	HIPS L/GRAY	AH81-00078C	1
3	PIEZO CAP		AH81-00078K	1
4	UNIT W/F	5 1/4″	AH81-00078G	1
5	CABINET ASS'Y		AH81-00078F	1

* CAUSION : It is used the bonding, connet NET FRAME to CABINET ASS'Y.
So when the disassembly, take extreme care not to demage the SPEAKER.

3. Electrical Parts List

Location no.	Code no.	Description & Specification	Remarks

*S.N.A. : Service Not Available

***** MAX900 Parts List *****

	AH26-80143Y	TRANS-POWER;EI66X30,115/230V,50/60Hz,MAX
	AH39-10002L	POWER CORD;CP2,KLCE-2F,2.15M,5239,VDE
	AH59-10124B	REMOCON-ASSY;-,-,BU2478-2Z,22,MAX-810,SAMSU

AH92-00001A ASSY-PCB - FRONT;MAX900, S.N.A.

UD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD12	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD13	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD14	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD15	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD22	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD16	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD17	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD18	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD19	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD3	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
UQ2	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9
UQ6	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,
UQ4	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9
ULD1	0601-001232	LED;TR,LED,1PCS,130-260%
ULD2	0601-001232	LED;TR,LED,1PCS,130-260%
ULD4	0601-001232	LED;TR,LED,1PCS,130-260%
UR12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-
UR13	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-
UR17	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-
UR18	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-
UR26	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR27	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR9	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR5	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-
UR15	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm
UR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
UR3	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
UR32	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
UR43	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
UR44	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
UR47	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-
UR50	2001-000325	R-CARBON;120ohm,5%,1/8W,AA,TP,1.8x3.2mm
UR46	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-
UR53	2001-000405	R-CARBON;180ohm,5%,1/8W,AA,TP,1.8x3.2mm
UR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR37	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR38	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR40	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR51	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR52	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-
UR14	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR19	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR28	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR31	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR34	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR35	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR42	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR48	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR6	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR22	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-
UR30	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-
-	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR25	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR23	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-
UR29	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-
UR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-
UR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR33	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m
UR45	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-
UR1	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm
UR4	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm
UR7	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm
UR8	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm
UR10	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-
UR11	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-
UR16	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-
UR21	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-
UC17	2201-000146	C-CERAMIC,DISC;100pF,5%,50V,SL,TP,5x3,5
UC10	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5
UC11	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5
UC2	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5
UC8	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5
UC9	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5
UC1	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
UC12	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
UC13	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
UC19	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
UC20	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
UC6	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP
UC18	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-
UC7	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,
UC16	2401-001904	C-AL;10UF,20%,16V,-,TP,4X7MM,5
UC14	2401-001931	C-AL;220NF,20%,50V,-,TP,4X7MM,5
UC5	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5
UC4	2401-001969	C-AL;470UF,20%,25V,GP,TP,10X12MM,5M
SW1	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW10	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW11	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW12	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW13	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW14	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW15	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW16	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW17	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW18	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW19	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW2	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW20	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW21	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW22	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW23	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW24	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW25	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW26	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW27	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW28	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW3	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW4	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW5	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW6	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW7	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW8	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
SW9	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS
UQ7	AC14-12001G	IC;KA78L05,T,-
ULD3	0601-001232	LED;TR,LED,1PCS,130-260%
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM
FWC2	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,
FWC1	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN
LAMP1	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,
LAMP2	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,
LAMP3	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,
R1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-
LCD	AH07-00001A	LCD;-,-,MAX900,-
UIC1	AH11-10035G	MASK-ROM;LC8667232-5K61,100P,QFP,-,8,-
LAMP1	AH61-00022A	CAP-;MAX900,SILICON,.,BLUE,RUBBER-CAP/BLUE,-
LAMP2	AH61-00022A	CAP-;MAX900,SILICON,.,BLUE,RUBBER-CAP/BLUE,-
LAMP3	AH61-00022A	CAP-;MAX900,SILICON,.,BLUE,RUBBER-CAP/BLUE,-
LCD1	AH61-20550A	HOLDER-LCD;-,ABS,94HB,WHT,-,MAX900
LCD1	AH67-40044A	FILTER-LCD;-,PC,T0.5,-,MILKY,-,-,MAX900,-

AH92-00003A ASSY-PCB - MAIN;MAX900 S.N.A./OPTION

DWF1	AH39-00023A	LEAD CONNECTOR-ASSY;-,51004-03,51004-03,03P,300MM,2547#28
TVD1	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S
AQ1	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1
AQ7	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1
MIC5	1201-000163	IC-OP AMP;BA4560F-E2
MIC8	1201-000163	IC-OP AMP;BA4560F-E2
MIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC
MIC10	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1000
AQ2	1203-000242	IC-POSI.FIXED REG.;7812,TO-220,3P,-,PLASTIC,11.5/
MIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.
AR2	2003-000556	R-METAL OXIDE(S);2.2ohm,5%,2W,AA,TP,4x12mm
AR44	2003-000556	R-METAL OXIDE(S);2.2ohm,5%,2W,AA,TP,4x12mm
AR3	2003-000593	R-METAL OXIDE(S);22ohm,5%,3W,AA,TP,6x16mm
AC20	2401-001943	C-AL;3300UF,20%,50V,GP,BK,25X40MM,1
TX2	2801-000734	CRYSTAL-UNIT;7.2MHZ,50PPM,28-AAM,12PF,30OHM
MX1	2801-003601	CRYSTAL-UNIT;4.332MHz,30ppm,28-AAM,30pF,
TCF2	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH
TCF4	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH
TCF3	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH
TCF1	2903-000148	FILTER-CERAMIC;BP,450KHZ+-1KHZ,-,6DB,-,BK,-

Location no.	Code no.	Description & Specifiation	Remarks
PF1	3601-000304	FUSE-FERRULE;250V,630mA,TL,GLASS,5x20mm	
DOUT	3707-001005	CONNECTER-OPTICAL;PLUG,SM,-,4.4/2.0MM	
MWF3	3711-000733	CONNECTOR-HEADER;BOX,17P,1R,2.5MM,STRAIGHT,SN	
MJ3	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
PWF1	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
MWF6	3711-000903	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DWF1	3711-000907	CONNECTOR-HEADER;BOX,3P,1R,2mm,STRAIGHT,SN	
MWF4	3711-001137	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
MWF1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
MJ4	3716-000209	TERMINAL-BLOCK;,-,-,60V,7A	
MJ5	3716-000210	TERMINAL-BLOCK;-,-,-,60V,7A	
HPJACK	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
MJ2	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
DIC1	AH14-10004R	IC;M74HCU04,SOP,TAPE 14P	
MIC7	AH14-10007G	IC;LC72131,DIP,STICK PLL	
MIC6	AH14-10008B	IC;LA1837,DIP,RF+MPX	
MIC9	AH14-10008E	IC;BU1923F,SOP,+5V	
TFT1	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
SFT1	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
SL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
SL3	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
TFT2	AH26-10020A	TRANS-DET;-,7KLL,DET,-,7.8MM,91PF,11.32M	
TL6	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
TL11	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
TL9	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
TL10	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT	
PL1	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
PL2	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
AL1	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL2	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL3	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL4	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
DWF1	AH39-00023A	LEAD CONNECTOR-ASSY;-,51004-03,51004-03,03P,300MM,2547#28	
MWF5	AH39-20008P	LEAD-CONNECTOR ASS'Y;5264,5395,2P,250MM,1007#26	
AP4	AH39-50001F	LEAD-FASTEN;,1007#24,300MM,WHT	
SP3	AH39-50001X	LEAD-FASTEN;RING,1007#24,200MM,BLK	
TFE1	AH40-10001T	TUNER;FE415-G11,-,75OHM	
DRWIRE	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
SP2	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
AHT	AH62-32011A	HEAT SINK-MAIN;-,AL,-,T3,-,-,-,MAX-900	
AD25	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD26	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD27	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD28	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD29	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AQ17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD10	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD12	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD13	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD14	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD15	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD18	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD19	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD21	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD10	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD11	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD18	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD19	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD20	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD21	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD22	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD23	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD24	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
MJW129	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD14	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD15	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD16	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD17	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AZD3	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
SZD1	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO	
AQ16	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
AQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ10	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ11	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ15	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
SQ3	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
TQ3	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
JQ1	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
JQ2	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
JQ3	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
AQ13	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
TQ1	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ2	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
SQ1	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350	
TQ5	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350	
SQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
SQ8	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ10	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ8	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ9	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ18	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ8	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ12	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
AQ3	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SQ14	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SQ5	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
AQ11	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ14	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ15	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ4	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ5	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ13	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ17	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ18	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ7	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
JQ4	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
SQ19	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
SQ20	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
AQ9	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
SQ12	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
SQ4	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
TR20	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,-	
SR12	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR57	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR69	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR14	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR74	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR75	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR36	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	
AR34	2001-000052	R-CARBON(S);3.3Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR43	2001-000052	R-CARBON(S);3.3Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR33	2001-000066	R-CARBON(S);10Kohm,5%,1/2W,AA,TP,2.4x6.4mm	
HR1	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
HR2	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
SR6	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR45	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR60	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
TR4	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
JR5	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
JR6	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR28	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
JR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR22	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR23	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR20	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR21	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR1	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR21	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR22	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR35	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR43	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR46	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR47	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR67	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR5	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR68	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR50	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR1	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR3	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR56	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR54	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR55	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR8	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR31	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR32	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR46	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	

Location no.	Code no.	Description & Specification	Remarks
AR47	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR49	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
FR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR24	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR26	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR32	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR34	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR70	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TCR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TCR22	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR16	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR38	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR40	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR44	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR45	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR63	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR61	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR23	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
SR58	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR10	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR11	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR17	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
MJW128	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR16	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
JR19	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR18	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR19	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR35	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR48	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR56	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR6	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR30	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR26	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR30	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR64	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR19	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR2	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR53	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR2	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR27	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
	2001-000552	R-CARBON;270ohm,5%,1/4W,AA,TP,2.4x6.4mm	
AR41	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR60	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR64	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR15	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR5	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR61	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
SR68	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
SR7	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
TR3	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
JR7	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR8	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR16	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR17	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR8	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR55	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
AR57	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
SR66	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,-	
AR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR21	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
MJW33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR22	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR31	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR38	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR55	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR9	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR32	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR62	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
JR2	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR4	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR71	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR51	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR54	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR58	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR9	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR13	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR33	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	

Location no.	Code no.	Description & Specification	Remarks
SR37	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR62	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR63	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR58	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR13	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR9	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR27	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR28	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR29	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR54	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR73	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR37	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR65	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR7	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR14	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR15	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR25	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR11	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR29	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR17	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR20	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR19	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
FR22	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR11	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR17	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR24	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR50	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR18	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR52	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR12	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR72	2001-000938	R-CARBON;68ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR10	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR56	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR57	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR66	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR51	2001-001000	R-CARBON;82Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR76	2001-001000	R-CARBON;82Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR59	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR65	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR1	2001-001095	R-CARBON(S);2.2Mohm,5%,1/2W,AA,TP,2.4x6.4m	
AR30	2001-001138	R-CARBON(S);390ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR20	2001-001144	R-CARBON(S);4.7Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR21	2001-001144	R-CARBON(S);4.7Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR1	2001-001146	R-CARBON(S);4.7ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR45	2001-001163	R-CARBON(S);560ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR46	2001-001163	R-CARBON(S);560ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR4	2001-001178	R-CARBON(S);680ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR37	2003-000428	R-METAL OXIDE(S);1.5Kohm,5%,1W,AA,TP,3.3x9mm	
AR7	2003-000534	R-METAL OXIDE(S);1Kohm,5%,1W,AA,TP,3.3x9mm	
SVR4	2103-000171	VR-SEMI;10KOHM,30%,1/10W,TOP	
TVR1	2103-000290	VR-SEMI;20Kohm,30%,1/10W,TOP	
SVR3	2103-000341	VR-SEMI;2Kohm,30%,1/10W,TOP	
TC60	2201-000146	C-CERAMIC,DISC;100pF,5%,50V,SL,TP,5x3,5	
AC21	2201-000163	C-CERAMIC,DISC;10nF,79.8,50V,Y5V,TP,6.5x5mm,2	
SC27	2201-000205	C-CERAMIC,DISC;10PF,5%,50V,RH,TP,5X3,5	
TC27	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
TC42	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
TC8	2201-000260	C-CERAMIC,DISC;180PF,10%,50V,SL,4*4,2.5,TP	
MC6	2201-000300	C-CERAMIC,DISC;1NF,20%,50V,Y5T,TP,5X3,5	
DC1	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
TC27	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
TC40	2201-000426	C-CERAMIC,DISC;27pF,5%,50V,SL,TP,5x3,5	
TC43	2201-000432	C-CERAMIC,DISC;2pF,0.3pF,50V,CH,TP,5.0x3.5,5	
DC3	2201-000487	C-CERAMIC,DISC;33pF,5%,50V,SL,TP,5x3,5m	
FC15	2201-000504	C-CERAMIC,DISC;39pF,5%,50V,SL,TP,-,5	
AC1	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
AC2	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
AC3	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
AC5	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
PC1	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
PC2	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
SC8	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
SC9	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
FC11	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
FC14	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC13	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC24	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC58	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC2	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC25	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC28	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC34	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC37	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC38	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC39	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC45	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC63	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC7	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
MC1	2201-000574	C-CERAMIC,DISC;47PF,5%,50V,RH,TP,5.0X3.0,5	
MC2	2201-000574	C-CERAMIC,DISC;47PF,5%,50V,RH,TP,5.0X3.0,5	

Location no.	Code no.	Description & Specifiation	Remarks
JC14	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC15	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC4	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC5	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
AC42	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
JC23	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC1	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC15	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC16	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC2	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC20	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC30	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC38	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC40	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC42	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC47	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC49	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC65	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC66	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC26	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC48	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC52	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC54	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC62	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC71	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC72	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
HC1	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
HC2	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
HC3	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
HC4	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC17	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC47	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC49	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC53	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
SC46	2202-000797	C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
TC46	2202-000797	C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
JC21	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
JC22	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
TC59	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
TC61	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
JC20	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC36	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC6	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC7	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC1	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC36	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC41	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
AC12	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
AC9	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
JC12	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
JC13	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
MC5	2202-000821	C-CERAMIC,MLC-AXIAL:560pF,10%,50V,Y5P,TP,3.5x19,-	
SC11	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
SC44	2202-000847	C-CERAMIC,MLC-AXIAL:1,8NF,30%,50V,Y5S,TP,3.5X1.9	
SC10	2202-000848	C-CERAMIC,MLC-AXIAL:1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
SC43	2202-000848	C-CERAMIC,MLC-AXIAL:1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
MC4	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
TR9	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
TC16	2301-000161	C-FILM,PEF;12NF,5%,50V,TP,6.5X5.5X3.0X5,5	
SC3	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
SC23	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
SC53	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
AC13	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
AC14	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
SC4	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
SC5	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
SC12	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
SC48	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
TC12	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
TC13	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
SC14	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
SC50	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
TC14	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
TC15	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
JC17	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
JC19	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
SC26	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
SC54	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
SC32	2301-000476	C-FILM,PEF;82nF,10%,50V,TP,10.5x12.5x6,7m	
SC33	2301-000476	C-FILM,PEF;82nF,10%,50V,TP,10.5x12.5x6,7m	
SC52	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC56	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
TC32	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
DC2	2401-000243	C-AL;100uF,20%,10V,GP,TP,6.3x5,5	
TC18	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC19	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC20	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
SC28	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
TC9	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
AC22	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
JC16	2401-000591	C-AL;1uF,20%,50V,BP,TP,3x5,2.5mm	
JC18	2401-000591	C-AL;1uF,20%,50V,BP,TP,3x5,2.5mm	
FC12	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	

Location no.	Code no.	Description & Specifiation	Remarks
FC13	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC1	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC10	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC2	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC3	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC6	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC7	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC8	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC9	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
MC3	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
AC8	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
FC10	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
SC22	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
SC17	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC18	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC19	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC34	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC35	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC39	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC41	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC55	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC29	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC30	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM	
TC44	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm	
FC9	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
MC9	2401-001474	C-AL;47uF,20%,10V,GP,TP,6.3x7,5	
AC41	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
FC8	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
AC27	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC18	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC21	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC25	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC37	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC51	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
TC33	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AC11	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
AC30	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC29	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC31	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC45	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
AC10	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC26	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC3	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC4	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC23	2401-001936	C-AL;22UF,20%,16V,GP,TP,5X11MM,5MM	
TC24	2401-001936	C-AL;22UF,20%,16V,GP,TP,5X11MM,5MM	
AC29	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC42	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC7	2401-001945	C-AL;330UF,20%,50V,GP,BK,10X20MM,5M	
AC31	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC11	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC24	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC25	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC10	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC11	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC6	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC5	2401-001967	C-AL;470NF,20%,50V,BP,BK,6X11MM,2MM	
AC15	2401-001969	C-AL;470UF,20%,25V,GP,TP,10X12MM,5M	
AC16	2401-001969	C-AL;470UF,20%,25V,GP,TP,10X12MM,5M	
AC40	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
AC41	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC21	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC35	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
AC23	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
MJW223	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
MJW225	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
SL1	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
DFT1	2901-001139	FILTER-EMI ON BOARD;50V,.5A,-,390PF,7X2.5X5MM,TP,RADIAL	
DBEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
DBEAD2	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
MBEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
PF1	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
	AH92-00001B	**ASS'Y PCB FRONT;MAX900,RDS**	**S.N.A,OPTION**
UD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD12	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD13	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD14	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD15	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD22	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
UD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD16	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD17	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD18	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UD19	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	

Location no.	Code no.	Description & Specifiation	Remarks
UD3	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
UQ2	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
UQ6	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
UQ4	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
ULD1	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD2	0601-001232	LED;TR,LED,1PCS,130-260%	
ULD4	0601-001232	LED;TR,LED,1PCS,130-260%	
UR12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR13	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR17	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR18	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR26	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR27	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR9	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR5	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR15	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR3	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR32	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR43	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR44	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR47	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR50	2001-000325	R-CARBON;120ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR46	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
UR53	2001-000405	R-CARBON;180ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR37	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR38	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR40	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR51	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR52	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR14	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR19	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR28	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR31	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR34	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR35	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR42	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR48	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR6	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR22	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR30	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
-	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR25	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR23	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
UR29	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
UR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR33	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR45	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
UR1	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR4	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR7	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR8	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR10	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR11	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR16	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR21	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UC17	2201-000146	C-CERAMIC,DISC;100pF,5%,50V,SL,TP,5x3,5	
UC10	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC11	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC2	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5	
UC8	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC9	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC1	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC12	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC13	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC19	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC20	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC6	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC18	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
UC7	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
UC16	2401-001904	C-AL;10UF,20%,16V,-,TP,4X7MM,5	
UC14	2401-001931	C-AL;220NF,20%,50V,-,TP,4X7MM,5	
UC5	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
UC4	2401-001989	C-AL;4.7uF,20%,50V,BP,TP,5x11,5	
SW1	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW10	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW11	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW12	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW13	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW14	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW15	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW16	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW17	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW18	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW19	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW2	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW20	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW21	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	

Location no.	Code no.	Description & Specifiation	Remarks
SW22	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW23	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW24	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW25	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW26	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW27	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW28	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW3	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW4	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW5	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW6	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW7	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW8	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW9	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
UQ7	AC14-12001G	IC;KA78L05,T,-	
ULD3	0601-001232	LED;TR,LED,1PCS,130-260%	
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,	
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM	
FWC2	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,	
FWC1	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN	
LAMP1	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,	
LAMP2	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,	
LAMP3	4713-000158	LAMP-NEON;9V,75MA,0.7W,TRP,3X5.3MM,-,	
R1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-	
LCD	AH07-00001A	LCD;-,-,MAX900,-	
UIC1	AH11-10035G	MASK-ROM;LC86667232-5K61,100P,QFP,-,8,-	
LAMP1	AH61-00022A	CAP-;MAX900,SILICON,,,BLUE,RUBBER-CAP/BLUE,-	
LAMP2	AH61-00022A	CAP-;MAX900,SILICON,,,BLUE,RUBBER-CAP/BLUE,-	
LAMP3	AH61-00022A	CAP-;MAX900,SILICON,,,BLUE,RUBBER-CAP/BLUE,-	
LCD1	AH61-20550A	HOLDER-LCD;-,ABS,94HB,WHT,-,MAX900	
LCD1	AH67-40044A	FILTER-LCD;-,PC,T0.5,-,MILKY,-,-,MAX900,-	

AH92-00003B ASS'Y-PCB-MAIN;MAX900RH, S.N.A./OPTION

TVD1	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S	
AQ1	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1	
AQ7	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1	
MIC5	1201-000163	IC-OP AMP;BA4560F-E2	
MIC8	1201-000163	IC-OP AMP;BA4560F-E2	
MIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC	
MIC10	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1000	
AQ2	1203-000242	IC-POSI.FIXED REG.;7812,TO-220,3P,-,PLASTIC,11.5/	
MIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.	
AR44	2003-000556	R-METAL OXIDE(S);2.2ohm,5%,2W,AA,TP,4x12mm	
AT3	2003-000593	R-METAL OXIDE(S);22ohm,5%,3W,AA,TP,6x16mm	
AC20	2401-002258	C-AL;4700UF,20%,50V,GP,BK,22X40MM,5	
TX2	2801-000734	CRYSTAL-UNIT;7.2MHZ,50PPM,28-AAM,12PF,30OHM	
MX1	2801-003601	CRYSTAL-UNIT;4.332MHz,30ppm,28-AAM,30pF,	
	2901-001139	FILTER-EMI ON BOARD;50V,.5A,-,390PF,7X2.5X5MM,TP,RADIAL	
TCF3	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH	
	2903-000119	FILTER-CERAMIC;SFE10.7MJA-10-A	
TCF1	2903-000148	FILTER-CERAMIC;BP,450KHZ+-1KHZ,-,6DB,-,BK,-	
DBEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
DBEAD2	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
PF1	3601-000304	FUSE-FERRULE;250V,630mA,TL,GLASS,5x20mm	
DOUT	3707-001005	CONNECTER-OPTICAL;PLUG,SM,-,4.4/2.OMM	
PWF2	3711-000190	CONNECTOR-HEADER;1WALL,2P,1R,7.92MM,STRAIGHT,SN	
MWF3	3711-000733	CONNECTOR-HEADER;BOX,17P,1R,2.5MM,STRAIGHT,SN	
MJ3	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
PWF1	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
DWF1	3711-000907	CONNECTOR-HEADER;BOX,3P,1R,2mm,STRAIGHT,SN	
MWF4	3711-001137	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
MWF1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
MWF6	3711-003107	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
MJ4	3716-000209	TERMINAL-BLOCK;-,-,-,60V,7A	
MJ5	3716-000210	TERMINAL-BLOCK;-,-,-,60V,7A	
HPJACK	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
MJ2	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
DIC1	AH14-10004R	IC;M74HCU04,SOP,TAPE 14P	
MIC7	AH14-10007G	IC;LC72131,DIP,STICK PLL	
MIC6	AH14-10008B	IC;LA1837,DIP,RF+MPX	
MIC9	AH14-10008E	IC;BU1923F,SOP,+5V	
TFT1	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
SFT1	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
SL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
SL3	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
TFT2	AH26-10020A	TRANS-DET;-,7KLL,DET,-,7.8MM,91PF,11.32M	
TL6	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
TL11	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
TL9	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
TL10	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT	
PL1	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
PL2	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
AL1	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
AL2	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
AL3	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
AL4	AH27-90001A	COIL-SPRING;,2.2UH,-,-,SPRING	
DWF1	AH39-00023A	LEAD CONNECTOR-ASSY;-,51004-03,51004-03,03P,300MM,2547#28	
MWF5	AH39-20008P	LEAD-CONNECTOR ASS'Y;5264,5395,2P,250MM,1007#26	
RING	AH39-50001X	LEAD-FASTEN;RING,1007#24,200MM,BLK	
TPE1	AH40-10025S	TUNER-FM;KST-F404VA-1,4G,75ohm	
AD24	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD25	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD26	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	

Location no.	Code no.	Description & Specifiation	Remarks
AD27	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD28	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD29	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AQ17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD10	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD12	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD13	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD14	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD15	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD18	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD19	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD21	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD10	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD11	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD18	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD19	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD20	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD21	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD22	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD23	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD24	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
MJW129	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD14	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD15	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD16	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD17	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
SZD1	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
SZD1	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO	
AZD3	0403-001010	DIODE-ZENER;UZP5.6B,5.6V,5.2-6.0V	
AQ16	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
AQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SA10	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ11	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ15	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
SQ3	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
TQ3	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
JQ1	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
JQ2	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
JQ3	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
AQ13	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
TQ1	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ2	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
SQ1	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350	
TQ5	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350	
SQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
SQ8	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ10	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ8	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ9	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ18	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ8	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ12	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
AQ3	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SQ14	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SQ5	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
AQ11	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ14	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ15	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ4	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ5A	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ13	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ17	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ18	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ7	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	

Location no.	Code no.	Description & Specifiation	Remarks
AQ14	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
JQ4	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
SQ19	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
SQ20	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
AQ9	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
SQ12	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
SQ4	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
TR20	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,-	
SR12	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR57	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR69	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR14	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR74	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR75	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR36	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	
AR34	2001-000052	R-CARBON(S);3.3Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR43	2001-000052	R-CARBON(S);3.3Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR33	2001-000066	R-CARBON(S);10Kohm,5%,1/2W,AA,TP,2.4x6.4mm	
HR1	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
HR2	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
SR6	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR60	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR64	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AH45	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR60	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
MR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR28	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR60	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
AR61	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR22	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR23	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
MR3	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR20	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR21	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR1	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR21	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR22	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR35	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR43	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR46	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR47	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR67	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR5	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR68	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR51	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR76	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR50	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR1	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR3	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR56	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR54	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR55	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
AR7	2001-000356	R-CARBON;150Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR31	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR47	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR49	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR56	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
FR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR24	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR26	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR32	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR34	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR70	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR16	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR38	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR40	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR43	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR44	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR45	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR6	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR63	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR61	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR36	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR23	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
SR58	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR10	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR11	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR17	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
JR2	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR4	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	

Location no.	Code no.	Description & Specification	Remarks
JR16	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
JR19	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MJW95	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR18	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR19	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR8	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR16	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR17	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR35	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR48	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR56	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR30	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR22	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR26	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR30	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR64	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR2	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR53	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
ST19	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR2	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR27	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
FREE	2001-000552	R-CARBON;270ohm,5%,1/4W,AA,TP,2.4x6.4mm	
AR34	2001-000588	R-CARBON;3.3KOHM,5%,1/4W,AA,TP,-	
AR41	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR60	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR64	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR15	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR5	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
AR41	2001-000611	R-CARBON;3.9KOHM,5%,1/4W,AA,TP,-	
JR5	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
JR6	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
SR61	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
SR68	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
SR7	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
TR3	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
JR2	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR4	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR16	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR17	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR8	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR55	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
AR57	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
JR7	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
JR8	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
SR66	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,-	
AR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR21	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
MJW33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR22	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR31	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR38	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR55	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR9	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR32	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR62	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR71	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR51	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR54	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR58	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR6	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR9	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR13	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR33	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR37	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR62	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR63	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR58	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR13	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR9	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR27	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR28	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR29	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR54	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR73	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR37	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR65	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR7	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR14	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR12	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR13	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR25	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR29	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR9	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR17	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR20	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
-	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
FR19	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
FR22	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR11	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR17	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR24	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR50	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
-	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR18	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR12	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR72	2001-000938	R-CARBON;68ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR10	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR21	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR56	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR57	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR66	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR31	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
AR32	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
SR51	2001-001000	R-CARBON;82Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR75	2001-001000	R-CARBON;82Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR59	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR65	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR1	2001-001095	R-CARBON(S);2.2Mohm,5%,1/2W,AA,TP,2.4x6.4m	
AR1	2001-001096	R-CARBON(S);2.2ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR20	2001-001144	R-CARBON(S);4.7Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR21	2001-001144	R-CARBON(S);4.7Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR1	2001-001146	R-CARBON(S);4.7ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR45	2001-001163	R-CARBON(S);560ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR46	2001-001163	R-CARBON(S);560ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR30	2001-001178	R-CARBON(S);680ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR4	2001-001178	R-CARBON(S);680ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR50	2001-001178	R-CARBON(S);680ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR37	2003-000428	R-METAL OXIDE(S);1.5Kohm,5%,1W,AA,TP,3.3x9mm	
SVR4	2103-000171	VR-SEMI;10KOHM,30%,1/10W,TOP	
TVR1	2103-000290	VR-SEMI;20Kohm,30%,1/10W,TOP	
SVR3	2103-000341	VR-SEMI;2Kohm,30%,1/10W,TOP	
MC4	2201-000146	C-CERAMIC,DISC;100pF,5%,50V,SL,TP,5x3,5	
TC60	2201-000146	C-CERAMIC,DISC;100pF,5%,50V,SL,TP,5x3,5	
AC21	2201-000163	C-CERAMIC,DISC;10nF,79.8,50V,Y5V,TP,6.5x5mm,2	
JC21	2201-000163	C-CERAMIC,DISC;10nF,79.8,50V,Y5V,TP,6.5x5mm,2	
JC8	2201-000163	C-CERAMIC,DISC;10nF,79.8,50V,Y5V,TP,6.5x5mm,2	
SC27	2201-000205	C-CERAMIC,DISC;10PF,5%,50V,RH,TP,5X3,5	
TC27	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
TC42	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
TC8	2201-000260	C-CERAMIC,DISC;180PF,10%,50V,SL,4*4,2.5,TP	
MC6	2201-000300	C-CERAMIC,DISC;1NF,20%,50V,Y5T,TP,5X3,5	
AC26	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
DC1	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
TC27	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
TC40	2201-000426	C-CERAMIC,DISC;27pF,5%,50V,SL,TP,5x3,5	
TC43	2201-000432	C-CERAMIC,DISC;2pF,0.3pF,50V,CH,TP,5.0x3.5,5	
DC3	2201-000487	C-CERAMIC,DISC;33pF,5%,50V,SL,TP,5x3,5m	
PC1	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
PC2	2201-000546	C-CERAMIC,DISC;4.7NF,20%,400V,Y5U,BK,16X7,10	
AC1	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
AC2	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
SC8	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
SC9	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
FC11	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
FC14	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
MC4	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC13	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC24	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC58	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC2	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC25	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC28	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC34	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC37	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC38	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC39	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC45	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC63	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC7	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
MC1	2201-000573	C-CERAMIC,DISC;47pF,5%,50V,CH,TP,6.5x3.0,5	
MC2	2201-000573	C-CERAMIC,DISC;47pF,5%,50V,CH,TP,6.5x3.0,5	
MC1	2201-000574	C-CERAMIC,DISC;47PF,5%,50V,RH,TP,5.0X3.0,5	
MC2	2201-000574	C-CERAMIC,DISC;47PF,5%,50V,RH,TP,5.0X3.0,5	
MC5	2201-000601	C-CERAMIC,DISC;.56NF,10%,50V,Y5P,TP,4X3MM,5	
JC14	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC15	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC4	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC5	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
AC42	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
JC23	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC1	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC15	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC16	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC2	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC20	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC30	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC38	2202-000781	C-CERAMIC,MLC-AXIAL;100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	

Location no.	Code no.	Description & Specifiation	Remarks
SC40	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC42	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC47	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC49	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC65	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC66	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC26	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC48	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC52	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC54	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC62	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC71	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC72	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
HC1	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
JC014	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC17	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC47	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC49	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC53	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
SC46	2202-000797	C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
TC46	2202-000797	C-CERAMIC,MLC-AXIAL:10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
JC010	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
JC011	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
JC21	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
JC22	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
TC59	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
TC61	2202-000806	C-CERAMIC,MLC-AXIAL:220pF,10%,50V,Y5P,TP,3.5x19,-	
AC010	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
JC20	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC36	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC6	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC7	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC1	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC16	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC36	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC41	2202-000807	C-CERAMIC,MLC-AXIAL:22NF,+80-20%,25V,Y5V,TP,3.5X19	
AC12	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
AC9	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
JC12	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
JC13	2202-000820	C-CERAMIC,MLC-AXIAL:5.6NF,20%,16V,Y5R,TP,3.5X19,-	
MC5	2202-000821	C-CERAMIC,MLC-AXIAL:560pF,10%,50V,Y5P,TP,3.5x19,-	
SC11	2202-000847	C-CERAMIC,MLC-AXIAL:1.8NF,30%,50V,Y5S,TP,3.5X1.9	
SC44	2202-000847	C-CERAMIC,MLC-AXIAL:1.8NF,30%,50V,Y5S,TP,3.5X1.9	
SC10	2202-000848	C-CERAMIC,MLC-AXIAL:1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
SC43	2202-000848	C-CERAMIC,MLC-AXIAL:1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
AC12	2202-000850	C-CERAMIC,MLC-AXIAL:2.2NF,30%,16V,Y5R,TP,3.5X1.9,-	
AC9	2202-000850	C-CERAMIC,MLC-AXIAL:2.2NF,30%,16V,Y5R,TP,3.5X1.9,-	
MC4	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
MC9	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
TR9	2202-000854	C-CERAMIC,MLC-AXIAL:47NF,30%,50V,Y5R,TP,3.5X1.9,-	
TC16	2301-000161	C-FILM,PEF:12NF,5%,50V,TP,6.5X5.5X3.0X5,5	
SC3	2301-000365	C-FILM,PEF:1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
SC23	2301-000370	C-FILM,PEF:1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
SC53	2301-000370	C-FILM,PEF:1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
AC13	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7m	
AC14	2301-000375	C-FILM,PEF:100nF,5%,50V,TP,11x12.5x6.5,7m	
SC4	2301-000379	C-FILM,PEF:10NF,10%,50V,TP,6X7X3.2MM,5MM	
SC5	2301-000379	C-FILM,PEF:10NF,10%,50V,TP,6X7X3.2MM,5MM	
SC12	2301-000390	C-FILM,PEF:15NF,10%,50V,TP,6.5X9X3.5MM,5M	
SC48	2301-000390	C-FILM,PEF:15NF,10%,50V,TP,6.5X9X3.5MM,5M	
TC12	2301-000390	C-FILM,PEF:15NF,10%,50V,TP,6.5X9X3.5MM,5M	
TC13	2301-000390	C-FILM,PEF:15NF,10%,50V,TP,6.5X9X3.5MM,5M	
SC14	2301-000393	C-FILM,PEF:18NF,10%,50V,TP,6.5X12.5X3.5MM	
SC50	2301-000393	C-FILM,PEF:18NF,10%,50V,TP,6.5X12.5X3.5MM	
TC14	2301-000404	C-FILM,PEF:2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
TC15	2301-000404	C-FILM,PEF:2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
JC17	2301-000412	C-FILM,PEF:22NF,10%,50V,TP,6.5X10.5X4MM,5	
JC19	2301-000412	C-FILM,PEF:22NF,10%,50V,TP,6.5X10.5X4MM,5	
JC17	2301-000430	C-FILM,PEF:33NF,10%,50V,TP,7.5X11X4MM,5MM	
JC19	2301-000430	C-FILM,PEF:33NF,10%,50V,TP,7.5X11X4MM,5MM	
SC26	2301-000474	C-FILM,PEF:8.2NF,10%,50V,TP,6.5X12X3.5,3.	
SC54	2301-000474	C-FILM,PEF:8.2NF,10%,50V,TP,6.5X12X3.5,3.	
SC32	2301-000476	C-FILM,PEF:82nF,10%,50V,TP,10.5x12.5x6,7m	
SC33	2301-000476	C-FILM,PEF:82nF,10%,50V,TP,10.5x12.5x6,7m	
DC2	2401-000240	C-AL:100uF,20%,10V,GP,TP,5x11,5	
SC52	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC56	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
TC32	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
DC2	2401-000243	C-AL;100uF,20%,10V,GP,TP,6.3x5,5	
TC18	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC19	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC20	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
SC28	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
TC9	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
AC22	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
AC23	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
AC8	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
FC10	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
SC22	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
SC17	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC18	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC19	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC34	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC35	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC39	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC41	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC55	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC29	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC29	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM	
TC30	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM	
TC44	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm	
FC9	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
MC9	2401-001465	C-AL;47UF,20%,10V,GP,-,5X11,2MM	
-	2401-001474	C-AL;47uF,20%,10V,GP,TP,6.3x7,5	
MC3	2401-001474	C-AL;47uF,20%,10V,GP,TP,6.3x7,5	
AC29	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
AC40	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
AC41	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
FC8	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
AC27	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC18	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC21	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC25	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC37	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC51	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
TC33	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AC30	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC29	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC31	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC45	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC45	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
AC10	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC26	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
JC16	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
JC18	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC3	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC4	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC23	2401-001936	C-AL;22UF,20%,16V,GP,TP,5X11MM,5MM	
TC24	2401-001936	C-AL;22UF,20%,16V,GP,TP,5X11MM,5MM	
AC29	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC7	2401-001945	C-AL;330UF,20%,50V,GP,BK,10X20MM,5M	
AC10	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
AC31	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC11	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC24	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC25	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC10	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC11	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC6	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC5	2401-001967	C-AL;470NF,20%,50V,BP,BK,6X11MM,2MM	
AC11	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
AC30	2401-001968	C-AL;470NF,20%,50V,GP,TP,5X11MM,5	
AC15	2401-001969	C-AL;470UF,20%,25V,GP,TP,10X12MM,5M	
AC16	2401-001969	C-AL;470UF,20%,25V,GP,TP,10X12MM,5M	
AC40	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
AC41	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC21	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC35	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
AC23	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC12	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
FC13	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JC10	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JC2	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JC3	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JC6	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JC7	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JC8	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JC9	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
JJC1	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
MC3	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
MJW223	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
MJW225	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
MJW223	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
MJW225	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
FL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
SL1	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
DFT1	2901-001139	FILTER-EMI ON BOARD;50V,.5A,-,390PF,7X2.5X5MM,TP,RADIAL	
DBEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
DBEAD2	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
MBEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
PF1	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
PF2	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	

G3V1 RADIO CD PLATER;

AH92-00005A ASSY-PCB-CD MAIN;G3VI,CD PACK S.N.A

NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-	
NIC928	0904-001159	IC-DSP;9286,8BIT,QFP,80P,-,1MHZ,TR,CM	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	

Location no.	Code no.	Description & Specifiation	Remarks
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR8	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC108	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC119	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC120	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC121	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC600	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC901	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC190	2203-000335	C-CERAMIC,CHIP;12pF,5%,50V,NPO,TP,2012,2.0m	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,2012,-,TP	
NC118	2203-000787	C-CERAMIC,CHIP;330pF,5%,50V,NPO,TP,2012,-	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC100	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC106	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC124	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC204	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	

Location no.	Code no.	Description & Specifiation	Remarks
NC52L	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52R	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC603	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC903	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC102	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC201	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC202	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NC203	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
NCW100	3708-001312	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT,SN	
NCW103	3711-000907	CONNECTOR-HEADER;BOX,3P,1R,2mm,STRAIGHT,SN	
SCW1	3711-002579	CONNECTOR-HEADER;WALL,22P,1R,2.5MM,ANGLE,	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5MM,STRAIGHT,SN	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500MW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100ohm,5%,1/4W,AA,TP,2.4x6.4mm	
NR106	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR113	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR555	2008-000141	R-FUSIBLE;2.2ohm,5%,1/4W,AA,TP,2.6x6.7mm	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NIC05	AC14-12001G	IC;KA78L05,T,-	
SCO4	AC14-12001G	IC;KA78L05,T,-	
	AJ59-20150T	DECK-CDP;CMS-300,-,-,-,-	
	SPK	PS900E/AMF	

**** MAX920 Parts List ****

AH39-10002L	POWER CORD;CP2,KLCE-2F,2.15M,5239,VDE	
AH59-20005U	DECK-CASSETTE;ADR2115SW3,MAX920/930,DC12	

AH92-00002A ASSY-PCB - FRONT;MAX920 S.N.A.

UD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD22	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UOD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UOD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP
UD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD16	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD17	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD18	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD19	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UD3	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP
UQ1	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-
UQ2	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9
UQ3	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,
UQ6	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,
UQ4	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9
ULD1	0601-001232	LED;TR,LED,1PCS,130-260%
ULD2	0601-001232	LED;TR,LED,1PCS,130-260%
UQ7	1203-000475	IC-POSI.FIXED REG.,78L05,TO-92,3P,-,PLASTIC,5V,82

Location no.	Code no.	Description & Specifiation	Remarks
UR12	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR13	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR17	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR18	2001-000221	R-CARBON;1.2KOHM,5%,1/8W,AA,TP,-	
UR26	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR27	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR9	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR5	2001-000258	R-CARBON;1.8KOHM,5%,1/8W,AA,TP,-	
UR15	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR2	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR3	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR32	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR43	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR44	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR47	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
UR46	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
UR50	2001-000405	R-CARBON;180ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR53	2001-000405	R-CARBON;180ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR37	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR38	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR40	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR51	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR52	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
UR14	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR19	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR28	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR31	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR34	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR35	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR42	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR48	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR6	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR22	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR30	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
UR25	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR23	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
UR29	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
UR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
UR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR33	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
UR45	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
UR1	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR4	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR7	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR8	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
UR10	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR11	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR16	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UR21	2001-000995	R-CARBON;820OHM,5%,1/8W,AA,TP,-	
UC17	2201-000146	C-CERAMIC,DISC;100pF,5%,50V,SL,TP,5x3,5	
UC10	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC11	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
UC2	2201-000368	C-CERAMIC,DISC;220PF,10%,50V,SL,TP,6.5X3.0,5	
UC8	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC9	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
UC1	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC12	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC13	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC19	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC20	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC6	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UPC1	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
UC18	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
UC4	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
UC7	2401-001891	C-AL;100uF,20%,10V,BP,TP,6x11mm,5mm	
UC16	2401-001904	C-AL;10UF,20%,16V,-,TP,4X7MM,5	
UC14	2401-001931	C-AL;220NF,20%,50V,-,TP,4X7MM,5	
UC5	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
SW1	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW10	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW11	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW12	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW13	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW14	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW15	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW16	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW17	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW18	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW19	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW2	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW20	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW21	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW22	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW23	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW24	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW25	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW26	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW27	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW28	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW3	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	

Location no.	Code no.	Description & Specifiation	Remarks
SW4	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW5	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW6	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW7	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW8	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
SW9	3404-000165	SWITCH-TACT;12V,50MA,160GF+-50GF,6X6MM,SPS	
	0601-001232	LED;TR,LED,1PCS,130-260%	
	2001-000020	R-CARBON(S);22ohm,5%,1/2W,AA,TP,2.4x6.4mm	
UX2	2801-001394	CRYSTAL-UNIT;32.768KHz,20ppm,28-AAY,12.5pF,	
UX1	2802-000181	RESONATOR-CERAMIC;6MHZ,0.3%,BK,9.0X4.0X7.5MM	
	3406-001022	SWITCH-ROTARY;5V,0.5mA,24Pulse/no click,12mm	
FWC2	3708-000454	CONNECTOR-FPC/FC/PIC;22P,1.25MM,STRAIGHT,	
FWC1	3710-001045	CONNECTOR-SOCKET;22P,1R,1.25MM,ANGLE,SN	
	3710-001046	CONNECTOR-SOCKET;10P,1R,1.25MM,ANGLE,SN	
	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
R1	AC59-60060A	MODULE-REMOCON;GP1U281R,SHARP,38KHZ,-,-,-,-	
	AH07-20046C	VF-MAX940 DISPLAY;SVA-12MM19,12 SEG,100X2	
	AH11-00001A	MASK-ROM;LC86P6548-5K84,100P,QFP,-,8BIT,-	
	AH39-00019A	LEAD-CONNECTOR ASSY;-,GT201-11,35023,11P,150MM,1007#28	
	AH39-00020A	LEAD-CONNECTOR ASSY;-,GT201-13,35023,13P,150MM,1007#28	
	AH39-20012W	LEAD-CONNECTOR ASS'Y;SC25,JC25,2P,150MM,1007#26	

AH92-00004A ASSY-PCB - MAIN;MAX920,MAIN S.N.A.

TVD1	0405-000137	DIODE-VARACTOR;KV-1260,20V,100NA,T0-92S	
AQ1	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1	
AQ7	0502-000424	TR-POWER;2SB1566-F,PNP,2W,TO-220FN,BK,1	
MIC2	1201-000163	IC-OP AMP;BA4560F-E2	
MIC5	1201-000163	IC-OP AMP;BA4560F-E2	
MIC8	1201-000163	IC-OP AMP;BA4560F-E2	
MIC1	1201-000358	IC-PREAMP;22291,DIP,24P,-,DUAL,-,PLASTIC	
MIC10	1201-001026	IC-POWER AMP;7265,ZIP,11P,19.6MIL,DUAL,1000	
AQ2	1203-000242	IC-POSI.FIXED REG.;7812,TO-220,3P,-,PLASTIC,11.5/	
MIC4	1204-001465	IC-VOLUME/TONE CONT.;TDA7440D,SOP,28,18.	
MIC3	1204-001469	IC-SOUND;M62438FP,SOP,10P,-,PLASTIC,12V	
AR2	2003-000556	R-METAL OXIDE(S);2.2ohm,5%,2W,AA,TP,4x12mm	
AR44	2003-000556	R-METAL OXIDE(S);2.2ohm,5%,2W,AA,TP,4x12mm	
AR3	2003-000593	R-METAL OXIDE(S);22ohm,5%,3W,AA,TP,6x16mm	
AC20	2401-002258	C-AL;4700UF,20%,50V,GP,BK,22X40MM,5	
TX2	2801-000734	CRYSTAL-UNIT;7.2MHZ,50PPM,28-AAM,12PF,30OHM	
MX1	2801-003601	CRYSTAL-UNIT;4.332MHz,30ppm,28-AAM,30pF,	
TCF2	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH	
TCF4	2903-000102	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,150KHZ+-50KH	
TCF3	2903-000105	FILTER-CERAMIC;BP,10.7MHZ+-25KHZ,180KHZ+-50KH	
TCF1	2903-000148	FILTER-CERAMIC;BP,450KHZ+-1KHZ,-,6DB,-,BK,-	
PF1	3601-000304	FUSE-FERRULE;250V,630mA,TL,GLASS,5x20mm	
DOUT	3707-001005	CONNECTER-OPTICAL;PLUG,SM,-,4.4/2.OMM	
MJ3	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
PWF1	3711-000814	CONNECTOR-HEADER;BOX,2P,1R,2.5mm,ANGLE,SN	
MWF31	3711-000903	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
MWF6	3711-000903	CONNECTOR-HEADER;BOX,3P,1R,2.5mm,STRAIGHT,SN	
DWF1	3711-000907	CONNECTOR-HEADER;BOX,3P,1R,2mm,STRAIGHT,SN	
MWF32	3711-001055	CONNECTOR-HEADER;BOX,6P,1R,2.5mm,STRAIGHT,SN	
MWF4	3711-001137	CONNECTOR-HEADER;BOX,8P,1R,2mm,STRAIGHT,SN	
MWF2	3711-003097	CONNECTOR-HEADER;NOWALL,10P,1R,1.25MM,ANGLE,SN	
MWF1	3711-003104	CONNECTOR-HEADER;NOWALL,22P,1R,1.25MM,ANGLE,SN	
MJ4	3716-000209	TERMINAL-BLOCK;,-,-,60V,7A	
MJ5	3716-000210	TERMINAL-BLOCK;-,-,-,60V,7A	
HPJACK	3722-000363	JACK-PHONE;9P,6.4MM,AU,BLK,-	
MJ2	3722-000377	JACK-RCA;4P/2C,3.5MM,SN,BLK,#16~22	
DIC1	AH14-10004R	IC;M74HCU04,SOP,TAPE 14P	
MIC7	AH14-10007G	IC;LC72131,DIP,STICK PLL	
MIC6	AH14-10008B	IC;LA1837,DIP,RF+MPX	
MIC9	AH14-10008E	IC;BU1923F,SOP,+5V	
P/T	AH26-00007A	TRANS-POWER;EI66X33,115/230V,-,MAX920	
TFT1	AH26-10001E	TRANS-IF;KS940228-09,-,-,7.6X12.0,-,450KHZ,BULK,	
SFT1	AH26-10002G	TRANS-IF;IODT-N5002,BIAS-OSC,3.7MH,7.6X12.0,L6/10	
SL2	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
SL3	AH26-10002Y	COIL-TRAP;FB875-85A,BIAS-TRAP,35DB,8.0,180PF,85KHZ	
TFT2	AH26-10020A	TRANS-DET;-,7KLL,DET,-,7.8MM,91PF,11.32M	
TL6	AH27-00007A	COIL-OSC;LKS7FB00-0060BLO-0,-,LW OSC	
TL11	AH27-00008A	COIL-OSC;LKS75M00-0060LMO-0,-,MW OSC	
TL9	AH27-00011A	COIL-OSC;LKS75M00-X000262-0,-,LW ANT	
TL10	AH27-00012A	COIL-OSC;LKS75M00-X000263-0,365UH,MW ANT	
PL1	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
PL2	AH27-10001F	COIL-CHOKE;27UH,K,Q30,-,-,DR(6.5*7.5),-,-,	
AL1	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL2	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL3	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
AL4	AH27-90001B	COIL-SPRING;,2.2UH,-,-,SPRING	
MWF5	AH39-00018A	LEAD-CONNECTOR ASSY;-,5264,51088,6P,300MM,1007#22	
UCW6	AH39-00019A	LEAD-CONNECTOR ASSY;-,GT201-11,35023,11P,150MM,1007#28	
UCW7	AH39-00020A	LEAD-CONNECTOR ASSY;-,GT201-13,35023,13P,150MM,1007#28	
MWF32	AH39-00021A	LEAD-CONNECTOR ASSY;-,5264,GT201-6,6P,300MM,2547#28,2P SHIEL	
MWF31	AH39-00022A	LEAD-CONNECTOR ASSY;-,5264,SOLDER,3P,300MM,2547#28,1P SHIELD	
DWF1	AH39-00023A	LEAD CONNECTOR-ASSY;-,51004-03,51004-03,03P,300MM,2547#28	
AP4	AH39-50001F	LEAD-FASTEN;,1007#24,300MM,WHT	
SP3	AH39-50001X	LEAD-FASTEN;RING,1007#24,200MM,BLK	
TFE1	AH40-10001T	TUNER;FE415-G11,-,75OHM	
DRWIRE	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
SP2	AH61-40022A	STUD-TAP;SPC1,T0.5,BT2,-,-,	
AHT	AH62-32011A	HEAT SINK-MAIN;-,AL,-,T3,-,-,-,MAX-900	
AD25	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD26	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	

Location no.	Code no.	Description & Specifiation	Remarks
AD27	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD28	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD29	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AQ17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD1	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD10	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD11	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD12	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD13	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD14	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD15	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD16	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD17	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD18	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD19	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD2	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD20	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD21	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD3	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD4	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD5	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD6	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD7	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD8	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
TD9	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
AD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD10	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD11	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD12	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD13	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD18	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD19	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD2	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD20	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD21	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD22	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD23	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD24	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
MJW129	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
PD1	0402-000127	DIODE-RECTIFIER;1N4002,100V,1A,DO-41,TP	
AD14	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD15	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD16	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AD17	0402-000157	DIODE-RECTIFIER;1N5402,200V,3A,DO-201AD,BK	
AZD3	0403-000393	DIODE-ZENER;UZP5.1B,5.1V,4.8-5.4V,1W,DO-41	
AZD2	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO	
SZD1	0403-000396	DIODE-ZENER;UZP6.8B,6.8V,6.4-7.2V,1W,DO	
AZD1	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
AZD5	0403-000564	DIODE-ZENER;TZP16A,16V,15.3-17.1V,1W,DO-41	
AQ16	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
AQ6	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ10	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ11	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ9	0501-000010	TR-SMALL SIGNAL;KSC1008,NPN,800mW,TO-92,TP,120	
SQ15	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
SQ3	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
TQ3	0501-000294	TR-SMALL SIGNAL;KSA708-Y,PNP,800mW,TO-92,TP,12	
JQ1	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
JQ2	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
JQ3	0501-000303	TR-SMALL SIGNAL;KSA733-Y,PNP,250mW,TO-92,-,120	
AQ13	0501-000331	TR-SMALL SIGNAL;KSC1009-Y,NPN,800mW,TO-92,-,12	
TQ1	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
TQ2	0501-000392	TR-SMALL SIGNAL;KSC838-O,NPN,250mW,TO-92,-,70-	
SQ1	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350	
TQ5	0501-000394	TR-SMALL SIGNAL;KSC900-L,NPN,250mW,TO-92,-,350	
SQ2	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
SQ8	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ10	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ8	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
TQ9	0501-000398	TR-SMALL SIGNAL;KSC945,NPN,250mW,TO-92,TP,120-	
AQ18	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ8	0501-000407	TR-SMALL SIGNAL;KSD471A-Y,NPN,800MW,TO-92,-,12	
AQ12	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
AQ3	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SQ14	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SQ5	0504-000118	TR-DIGITAL;KSR1003,NPN,300mW,22K-22K,TO-9	
AQ11	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ14	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ15	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ4	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
AQ5	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ13	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ17	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ18	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
SQ7	0504-000121	TR-DIGITAL;KSR1007,NPN,300MW,22K-47K,TO-9	
JQ4	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
SQ19	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
SQ20	0504-000122	TR-DIGITAL;KSR1009Y,NPN,300mW,4.7K,TO-92,	
AQ9	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
SQ12	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
SQ4	0504-001003	TR-DIGITAL;KSR2003,PNP,300MW,22K-22K,TO-9	
TR20	2001-000005	R-CARBON;390OHM,5%,1/8W,AA,TP,-	
SR12	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR57	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR69	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR14	2001-000008	R-CARBON;15Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR74	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR75	2001-000010	R-CARBON;68Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR36	2001-000050	R-CARBON;2.7KOHM,5%,1/4W,AA,TP,-	
AR34	2001-000052	R-CARBON(S);3.3Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR43	2001-000052	R-CARBON(S);3.3Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR33	2001-000066	R-CARBON(S);10Kohm,5%,1/2W,AA,TP,2.4x6.4mm	
HR1	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
HR2	2001-000109	R-CARBON(S);470ohm,5%,1/2W,AA,TP,2.4x6.4mm	
SR6	2001-000241	R-CARBON;1.5Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR45	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
AR60	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
TR4	2001-000273	R-CARBON;100KOHM,5%,1/8W,AA,TP,-	
JR5	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
JR6	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MR3	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR28	2001-000281	R-CARBON;100ohm,5%,1/8W,AA,TP,1.8x3.2mm	
JR11	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR12	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR22	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
JR23	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR20	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR21	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR1	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR21	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR22	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR35	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR43	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR46	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR47	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
TR67	2001-000290	R-CARBON;10KOHM,5%,1/8W,AA,TP,-	
SR5	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR68	2001-000302	R-CARBON;10ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR50	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR1	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR3	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
SR56	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR54	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR55	2001-000331	R-CARBON;12KOHM,5%,1/8W,AA,TP,-	
TR8	2001-000362	R-CARBON;150ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR31	2001-000411	R-CARBON;18KOHM,5%,1/8W,AA,TP,-	
AR31	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR32	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR46	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR47	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR49	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR8	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
FR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR24	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
JR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR14	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR15	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR26	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR32	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR34	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
SR70	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TCR18	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TCR22	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR16	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR36	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR38	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR39	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR40	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR41	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR42	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR44	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR45	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
TR63	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
AR61	2001-000449	R-CARBON;2.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR23	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
SR58	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR10	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR11	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
TR17	2001-000472	R-CARBON;2.7KOHM,5%,1/8W,AA,TP,-	
MJW128	2001-000508	R-CARBON;220Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR16	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
JR19	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
MJW95	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	

Location no.	Code no.	Description & Specification	Remarks
TR18	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR19	2001-000515	R-CARBON;220ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR35	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR48	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR5	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR56	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR6	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR30	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR26	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR30	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR64	2001-000522	R-CARBON;22Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR19	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR2	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR53	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR2	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR27	2001-000527	R-CARBON;22ohm,5%,1/8W,AA,TP,1.8x3.2mm	
	2001-000552	R-CARBON;270ohm,5%,1/4W,AA,TP,2.4x6.4mm	
AR41	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR60	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR64	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR15	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
TR5	2001-000591	R-CARBON;3.3KOHM,5%,1/8W,AA,TP,-	
SR61	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
SR68	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
SR7	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
TR3	2001-000613	R-CARBON;3.9KOHM,5%,1/8W,AA,TP,-	
JR7	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR8	2001-000645	R-CARBON;330Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR16	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR17	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
DR8	2001-000660	R-CARBON;33Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR4	2001-000663	R-CARBON;33ohm,5%,1/2W,AA,TP,3.3x9mm	
AR55	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
AR57	2001-000689	R-CARBON;390KOHM,5%,1/8W,AA,TP,-	
SR66	2001-000708	R-CARBON;39OHM,5%,1/8W,AA,TP,-	
AR42	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR20	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
FR21	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
MJW33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR22	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR31	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR38	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR55	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
SR9	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR32	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR33	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
TR62	2001-000734	R-CARBON;4.7KOHM,5%,1/8W,AA,TP,-	
JR2	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR4	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR71	2001-000773	R-CARBON;470Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR51	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR53	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR54	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR58	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR9	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR13	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR33	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR37	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR62	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR63	2001-000786	R-CARBON;47Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR52	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR58	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR13	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
JR9	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR27	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR28	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR29	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR54	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR73	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR24	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR37	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR65	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR7	2001-000802	R-CARBON;5.6Kohm,5%,1/8W,AA,TP,1.8x3.2m	
AR14	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR15	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR25	2001-000857	R-CARBON;560ohm,5%,1/8W,AA,TP,1.8x3.2mm	
AR11	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
AR29	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR17	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
JR20	2001-000864	R-CARBON;56KOHM,5%,1/8W,AA,TP,1.8X3.2MM	
FR19	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
FR22	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR11	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR17	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR24	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR50	2001-000890	R-CARBON;6.8KOHM,5%,1/8W,AA,TP,-	
SR18	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR52	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR12	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
TR13	2001-000924	R-CARBON;680ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR72	2001-000938	R-CARBON;68ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR10	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR56	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR57	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
TR66	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
SR51	2001-001000	R-CARBON;82Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR76	2001-001000	R-CARBON;82Kohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR59	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
SR65	2001-001006	R-CARBON;82ohm,5%,1/8W,AA,TP,1.8x3.2mm	
PR1	2001-001095	R-CARBON(S);2.2Mohm,5%,1/2W,AA,TP,2.4x6.4m	
AR30	2001-001138	R-CARBON(S);390ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR20	2001-001144	R-CARBON(S);4.7Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR21	2001-001144	R-CARBON(S);4.7Kohm,5%,1/2W,AA,TP,2.4x6.4m	
AR1	2001-001146	R-CARBON(S);4.7ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR39	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR40	2001-001153	R-CARBON(S);47ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR45	2001-001163	R-CARBON(S);560ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR46	2001-001163	R-CARBON(S);560ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR4	2001-001178	R-CARBON(S);680ohm,5%,1/2W,AA,TP,2.4x6.4mm	
AR37	2003-000428	R-METAL OXIDE(S);1.5Kohm,5%,1W,AA,TP,3.3x9mm	
AR7	2003-000534	R-METAL OXIDE(S);1Kohm,5%,1W,AA,TP,3.3x9mm	
AR36	2003-000765	R-METAL OXIDE(S);680ohm,5%,1W,AA,TP,3.3x9mm	
SVR4	2103-000171	VR-SEMI;10KOHM,30%,1/10W,TOP	
SVR1	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
SVR2	2103-000248	VR-SEMI;200KOHM,30%,1/10W,TOP	
TVR1	2103-000290	VR-SEMI;20Kohm,30%,1/10W,TOP	
SVR3	2103-000341	VR-SEMI;2Kohm,30%,1/10W,TOP	
TC60	2201-000146	C-CERAMIC,DISC;100pF,5%,50V,SL,TP,5x3,5	
AC21	2201-000163	C-CERAMIC,DISC;10nF,79.8,50V,Y5V,TP,6.5x5mm,2	
SC27	2201-000205	C-CERAMIC,DISC;10PF,5%,50V,RH,TP,5X3,5	
TC27	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
TC42	2201-000247	C-CERAMIC,DISC;15pF,5%,50V,CH,TP,5x3,5	
TC8	2201-000260	C-CERAMIC,DISC;180PF,10%,50V,SL,4*4,2.5,TP	
JC014	2201-000300	C-CERAMIC,DISC;1NF,20%,50V,Y5T,TP,5X3,5	
MC6	2201-000300	C-CERAMIC,DISC;1NF,20%,50V,Y5T,TP,5X3,5	
DC1	2201-000381	C-CERAMIC,DISC;22NF,20%,50V,Y5V,8.0x4.0mm,5mm,TP	
TC27	2201-000423	C-CERAMIC,DISC;27pF,5%,50V,NPO,TP,5x3,2.5	
TC40	2201-000426	C-CERAMIC,DISC;27pF,5%,50V,SL,TP,5x3,5	
TC43	2201-000432	C-CERAMIC,DISC;2pF,0.3pF,50V,CH,TP,5.0x3.5,5	
DC3	2201-000487	C-CERAMIC,DISC;33pF,5%,50V,SL,TP,5x3,5m	
FC15	2201-000504	C-CERAMIC,DISC;39pF,5%,50V,SL,TP,-,5	
AC1	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
AC2	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
PC1	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
PC2	2201-000520	C-CERAMIC,DISC;4.7NF,+80-20%,400VAC,Y5V,BK,-,	
SC8	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
SC9	2201-000547	C-CERAMIC,DISC;4.7nF,20%,500V,Y5T,TP,8x3,5	
FC11	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
FC14	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC13	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC24	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
SC58	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC2	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC25	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC28	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC34	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC37	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC38	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC39	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC45	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC63	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
TC7	2201-000565	C-CERAMIC,DISC;47nF,20%,50V,Y5V,12.5x4.0mm,5mm,TP	
MC1	2201-000574	C-CERAMIC,DISC;47PF,5%,50V,RH,TP,5.0X3.0,5	
MC2	2201-000574	C-CERAMIC,DISC;47PF,5%,50V,RH,TP,5.0X3.0,5	
JC14	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC15	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC4	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC5	2201-000783	C-CERAMIC,DISC;100NF,+80%,-20%,50V,Y5V,TP,8X3	
JC23	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC1	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC15	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC16	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC2	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC20	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC30	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC38	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC40	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC42	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC47	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC49	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC65	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
SC66	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC26	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC48	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC52	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC62	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC71	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
TC72	2202-000781	C-CERAMIC,MLC-AXIAL:100pF,10%,50V,Y5P,TP;100PF,10%,50V,Y5P,TP,3.5X19,-	
HC1	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
HC2	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
HC3	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
HC4	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC17	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC47	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	
TC49	2202-000796	C-CERAMIC,MLC-AXIAL:1nF,10%,50V,Y5P,TP,3.5x19,-	

Location no.	Code no.	Description & Specification	Remarks
TC53	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
SC46	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
TC46	2202-000797	C-CERAMIC,MLC-AXIAL;10NF,30%,16V,Y5S,TP,3.5X1.9MM,-	
JC010	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
JC011	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
JC21	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
JC22	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
TC59	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
TC61	2202-000806	C-CERAMIC,MLC-AXIAL;220pF,10%,50V,Y5P,TP,3.5x19,-	
AC010	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
JC20	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC36	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC6	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
SC7	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC1	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC36	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
TC41	2202-000807	C-CERAMIC,MLC-AXIAL;22NF,+80-20%,25V,Y5V,TP,3.5X19	
AC12	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
AC9	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
JC12	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
JC13	2202-000820	C-CERAMIC,MLC-AXIAL;5.6NF,20%,16V,Y5R,TP,3.5X19,-	
MC5	2202-000821	C-CERAMIC,MLC-AXIAL;560pF,10%,50V,Y5P,TP,3.5x19,-	
SC11	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
SC44	2202-000847	C-CERAMIC,MLC-AXIAL;1,8NF,30%,50V,Y5S,TP,3.5X1.9	
SC10	2202-000848	C-CERAMIC,MLC-AXIAL;1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
SC43	2202-000848	C-CERAMIC,MLC-AXIAL;1.5NF,30%,50V,Y5S,TP,3.5X1.9,-	
MC4	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
TR9	2202-000854	C-CERAMIC,MLC-AXIAL;47NF,30%,50V,Y5R,TP,3.5X1.9,-	
TC16	2301-000161	C-FILM,PEF;12NF,5%,50V,TP,6.5X5.5X3.0X5,5	
SC3	2301-000365	C-FILM,PEF;1.5nF,10%,50V,TP,5.5x7x2.8mm,5	
SC23	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
SC53	2301-000370	C-FILM,PEF;1.8NF,10%,50V,TP,5.5X7X2.8M,5M	
AC13	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
AC14	2301-000375	C-FILM,PEF;100nF,5%,50V,TP,11x12.5x6.5,7m	
SC4	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
SC5	2301-000379	C-FILM,PEF;10NF,10%,50V,TP,6X7X3.2MM,5MM	
SC12	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
SC48	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
TC12	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
TC13	2301-000390	C-FILM,PEF;15NF,10%,50V,TP,6.5X9X3.5MM,5M	
SC14	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
SC50	2301-000393	C-FILM,PEF;18NF,10%,50V,TP,6.5X12.5X3.5MM	
TC14	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
TC15	2301-000404	C-FILM,PEF;2.2NF,10%,50V,TP,5.5X7X3.2MM,5	
JC17	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
JC19	2301-000412	C-FILM,PEF;22NF,10%,50V,TP,6.5X10.5X4MM,5	
SC26	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
SC54	2301-000474	C-FILM,PEF;8.2NF,10%,50V,TP,6.5X12X3.5,3.	
SC32	2301-000476	C-FILM,PEF;82nF,10%,50V,TP,10.5x12.5x6,7m	
SC33	2301-000476	C-FILM,PEF;82nF,10%,50V,TP,10.5x12.5x6,7m	
SC52	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC56	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
TC32	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
DC2	2401-000243	C-AL;100uF,20%,10V,GP,TP,6.3x5,5	
AC25	2401-000375	C-AL;100UF,5%,100V,GP,TP,10X20,5MM	
TC18	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC19	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
TC20	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
SC28	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
TC9	2401-000438	C-AL;10UF,20%,25V,GP,-,5X11,2MM	
AC22	2401-000475	C-AL;10UF,20%,50V,GP,-,5X11,2MM	
JC16	2401-000591	C-AL;1uF,20%,50V,BP,TP,3x5,2.5mm	
JC18	2401-000591	C-AL;1uF,20%,50V,BP,TP,3x5,2.5mm	
FC12	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
FC13	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC1	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC10	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC2	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC3	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC6	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC7	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC8	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
JC9	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
MC3	2401-000656	C-AL;2.2UF,20%,50V,GP,-,5X11,-	
AC8	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
FC10	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
SC22	2401-000830	C-AL;220uF,20%,25V,GP,TP,8x11.5,5	
SC17	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC18	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC19	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC34	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC35	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC39	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC41	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
SC55	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC29	2401-001022	C-AL;3.3UF,20%,50V,GP,-,5X11,2MM	
TC30	2401-001164	C-AL;33UF,20%,16V,GP,-,5X11,2MM	
TC44	2401-001324	C-AL;470nF,20%,50V,GP,BK,3x5,1mm	
FC9	2401-001355	C-AL;470UF,20%,10V,GP,-,8X11.5,5MM	
MC9	2401-001474	C-AL;47uF,20%,10V,GP,TP,6.3x7,5	
AC41	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
FC8	2401-001511	C-AL;47UF,20%,16V,GP,-,6X7,5	
AC27	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC18	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC21	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC25	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC37	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
SC51	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
TC33	2401-001538	C-AL;47UF,20%,25V,GP,-,6X11,2.5MM	
AC11	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
AC30	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC29	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC31	2401-001645	C-AL;680nF,20%,50V,GP,-,5x11,2mm	
SC45	2401-001895	C-AL;100uF,20%,16V,GP,6.3x11mm,2.5m	
AC10	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
AC26	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC3	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC4	2401-001912	C-AL;1uF,20%,50V,GP,5x11mm,2mm,BK	
TC23	2401-001936	C-AL;22UF,20%,16V,GP,TP,5X11MM,5MM	
TC24	2401-001936	C-AL;22UF,20%,16V,GP,TP,5X11MM,5MM	
AC29	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC42	2401-001938	C-AL;22UF,20%,25V,GP,BK,5X11MM,2MM	
AC7	2401-001945	C-AL;330UF,20%,50V,GP,BK,10X20MM,5M	
AC31	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC11	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC24	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
JC25	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC10	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC11	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC6	2401-001954	C-AL;4.7UF,20%,50V,GP,BK,5X11MM,5	
TC5	2401-001967	C-AL;470NF,20%,50V,BP,BK,6X11MM,2MM	
AC15	2401-001969	C-AL;470UF,20%,25V,GP,TP,10X12MM,5M	
AC16	2401-001969	C-AL;470UF,20%,25V,GP,TP,10X12MM,5M	
AC40	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
AC41	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC21	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
TC35	2401-001975	C-AL;47UF,20%,16V,GP,TP,5X11MM,5	
AC24	2401-002168	C-AL;100UF,20%,50V,GP,TP,10X12.5,5M	
AC23	2401-002180	C-AL;2.2UF,20%,50V,GP,TP,5X11,5MM	
MJW223	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
MJW225	2701-000177	INDUCTOR-AXIAL;33UH,10%,2.5X3.4MM	
SL1	2701-000298	INDUCTOR-AXIAL;470uH,10%,4.2x9.8mm	
DFT1	2901-001139	FILTER-EMI ON BOARD;50V,.5A,-,390PF,7X2.5X5MM,TP,RADIAL	
DBEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
DBEAD2	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
MBEAD1	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
MJW112	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
MJW241	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
PF1	3602-000147	FUSE-CLIP;250V,7.5A,30MOHM	
WIRE1	AH38-00002A	WIRE-LEAD;1007#24,150MM	
WIRE2	AH38-00003A	WIRE-LEAD;1007#24,200MM	
	AH59-00004A	REMOCON---ASSY;-,-,-,22KEY,MAX940,-	

G3VI M;CDP PACK

AH92-00005A ASSY-PCB-CD MAIN;G3VI,CD PACK

NQ1502	0501-000314	TR-SMALL SIGNAL;KSA812,PNP,150MW,SOT-23,TP,90-	
NIC928	0904-001159	IC-DSP;9286,8BIT,QFP,80P,-,1MHZ,TR,CM	
NIC925	1003-000179	IC-MOTOR DRIVER;KA9258D,SOP,28P,-,SINGLE,-,ST,	
NIC922	1204-001286	IC-ASP;KB9223,QFP,80P,-,PLASTIC,6V,20	
NR109	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR203	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR300	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57L	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR57R	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR606	2007-000282	R-CHIP;100KOHM,5%,1/10W,DA,TP,2012	
NR602	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR603	2007-000300	R-CHIP;10KOHM,5%,1/10W,DA,TP,2012	
NR104	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR107	2007-000338	R-CHIP;120KOHM,5%,1/10W,DA,TP,2012	
NR100	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR120	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR121	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
NR204	2007-000355	R-CHIP;12KOHM,5%,1/10W,DA,TP,2012	
FREE	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR103	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR119	2007-000395	R-CHIP;150KOHM,5%,1/10W,DA,TP,2012	
NR400	2007-000409	R-CHIP;15KOHM,5%,1/10W,DA,TP,2012	
NR115	2007-000444	R-CHIP;180KOHM,5%,1/10W,DA,TP,2012	
NR10	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR11	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR12	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR5	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54L	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR54R	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR6	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR604	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR7	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR8	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR804	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR3	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
SR4	2007-000468	R-CHIP;1KOHM,5%,1/10W,DA,TP,2012	
NR114	2007-000477	R-CHIP;1MOHM,5%,1/10W,DA,TP,2012	
NR50L	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	

Location no.	Code no.	Description & Specifiation	Remarks
NR50R	2007-000586	R-CHIP;22KOHM,5%,1/10W,DA,TP,2012	
NR101	2007-000593	R-CHIP;22OHM,5%,1/10W,DA,TP,2012	
NR200	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52L	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR52R	2007-000653	R-CHIP;27KOHM,5%,1/10W,DA,TP,2012	
NR201	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR202	2007-000686	R-CHIP;3.3KOHM,5%,1/10W,DA,TP,2012	
NR105	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR995	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR996	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR997	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR998	2007-000830	R-CHIP;39KOHM,5%,1/10W,DA,TP,2012	
NR53L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR53R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55L	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR55R	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
SR2	2007-000872	R-CHIP;4.7KOHM,5%,1/10W,DA,TP,2012	
NR117	2007-000898	R-CHIP;430Kohm,5%,1/10W,DA,TP,2012	
NR108	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR111	2007-000941	R-CHIP;47KOHM,5%,1/10W,DA,TP,2012	
NR112	2007-001039	R-CHIP;56KOHM,5%,1/10W,DA,TP,2012	
NR116	2007-001195	R-CHIP;820KOHM,5%,1/10W,DA,TP,2012	
NR994	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
NR999	2007-001208	R-CHIP;82KOHM,5%,1/10W,DA,TP,2012	
	2007-001216	R-CHIP;82OHM,5%,1/10W,DA,TP,2012	
NC107	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC108	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC119	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC120	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC121	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC600	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC901	2203-000199	C-CERAMIC,CHIP;100nF,79.8,50V,Z5U,TP,2012,-	
NC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC103	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC112	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC113	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC116	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC205	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC502	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC503	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC504	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53L	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC53R	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC602	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC800	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC804	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC905	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC1	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC2	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
SC6	2203-000260	C-CERAMIC,CHIP;10nF,10%,50V,X7R,TP,2012,-	
NC190	2203-000335	C-CERAMIC,CHIP;12pF,5%,50V,NPO,TP,2012,2.0m	
NC117	2203-000477	C-CERAMIC,CHIP;1uF,+80-20%,16V,Y5V,TP,2012,-	
NC110	2203-000495	C-CERAMIC,CHIP;2.2nF,10%,50V,X7R,2012,-,TP	
NC118	2203-000787	C-CERAMIC,CHIP;330pF,5%,50V,NPO,TP,2012,-	
NC101	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC111	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC125	2203-000802	C-CERAMIC,CHIP;33nF,10%,50V,X7R,TP,2012,-	
NC100	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC106	2203-000892	C-CERAMIC,CHIP;4.7NF,10%,50V,X7R,TP,2012,-	
NC124	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC204	2203-000919	C-CERAMIC,CHIP;470nF,+80-20%,16V,Y5V,TP,2012,	
NC200	2203-000979	C-CERAMIC,CHIP;47nF,10%,50V,X7R,TP,2012,-	
NC115	2203-001137	C-CERAMIC,CHIP;68nF,+80-20%,50V,Y5V,TP,2012,-	
NC104	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52L	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC52R	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC603	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC903	2203-001537	C-CERAMIC,CHIP;1NF,10%,50V,X7R,TP,2012,-	
NC102	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC201	2203-001551	C-CERAMIC,CHIP;1.5NF,10%,50V,X7R,TP,2012,2MM	
NC202	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NC203	2203-001619	C-CERAMIC,CHIP;27PF,5%,50V,NPO,TP,2012,2MM	
NL105	3301-000325	CORE-FERRITE BEAD;AB,3.2x2.5x1.3mm,-,-	
SIC1	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
SIC2	1003-001162	IC-MOTOR DRIVER;KA3082,SIP,10PIN,25MIL,DOUBLE,	
NXF100	2802-000211	RESONATOR-CERAMIC;16.93MHZ,0.5%,TP,10.0X5.0X10.0	
SCW5	3708-001131	CONNECTOR-FPC/FC/PIC;5P,1.25mm,STRAIGHT,SN	
NCW100	3708-001312	CONNECTOR-FPC/FC/PIC;16P,1mm,STRAIGHT,SN	
	3711-000906	CONNECTOR-HEADER;BOX,3P,1R,2mm,ANGLE,SN	
SCW1	3711-002579	CONNECTOR-HEADER;WALL,22P,1R,2.5MM,ANGLE,	
SCW7	3711-003379	CONNECTOR-HEADER;NOWALL,3P,1R,2.5MM,STRAIGHT,SN	
NCW101	AH39-20025S	LEAD-CONNECTOR,ASSY;-,51004-08,35023-08,8P,300MM,1	
NCW102	AH39-20561P	LEAD CONNECTOR-ASSY;-,5295,PHR,6P,150mm,1007#28	
ND200	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND201	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND202	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
ND203	0401-000101	DIODE-SWITCHING;1N4148,100V,200mA,DO-35,TP	
SZD1	0403-000352	DIODE-ZENER;UZ4.7BM,4.7V,4.4-5.0V,500MW,DO	
SZD2	0403-000361	DIODE-ZENER;UZ6.2BSB,6.2V,5.99-6.24V,50	
NQ1501	0501-000610	TR-SMALL SIGNAL;KSA928A-Y,PNP,1W,TO-92L,TP,160	
SR1	2001-000027	R-CARBON;100ohm,5%,1/4W,AA,TP,2.4x6.4mm	
NR106	2001-000319	R-CARBON;120Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR1	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR2	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR3	2001-000429	R-CARBON;1KOHM,5%,1/8W,AA,TP,-	
NR113	2001-000977	R-CARBON;8.2Kohm,5%,1/8W,AA,TP,1.8x3.2m	
NR555	2008-000141	R-FUSIBLE;2.2ohm,5%,1/4W,AA,TP,2.6x6.7mm	
NC400	2202-000243	C-CERAMIC,MLC-AXIAL;33PF,5%,50V,SL,3.5X19,-,TP	
NC300	2202-000796	C-CERAMIC,MLC-AXIAL;1nF,10%,50V,Y5P,TP,3.5x19,-	
NC117	2301-000389	C-FILM,PEF;150nF,5%,50V,TP,12.5x15x7.5,7m	
NC105	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC501	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC702	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC904	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
SC14	2401-000240	C-AL;100uF,20%,10V,GP,TP,5x11,5	
NC114	2401-000419	C-AL;10UF,20%,16V,GP,-,4X7,5	
NC301	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC700	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
NC701	2401-000778	C-AL;220uF,20%,10V,GP,6.3x11,2.5mm,	
SC5	2401-000795	C-AL;220UF,20%,16V,GP,-,8X11.5,3.5M	
NC703	2401-001102	C-AL;330UF,20%,16V,GP,TP,8X12,5	
NC122	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC50R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC54	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55L	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NC55R	2401-001952	C-AL;4.7UF,20%,50V,-,TP,6.3X7,5	
NL101	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL102	2701-000111	INDUCTOR-AXIAL;100uH,10%,2.5x3.4mm	
NL100	2701-000114	INDUCTOR-AXIAL;10uH,10%,2.5x3.4mm	
SL1	2701-000179	INDUCTOR-AXIAL;33uH,10%,4.2x9.8mm	
NL300	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL301	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
NL302	3301-000297	CORE-FERRITE BEAD;AA,3.6X1.2X5.7MM,1400,2900G	
	AJ59-20150T	DECK-CDP;CMS-300,-,-,-,-	

4. Block Diagram

4-1 Main(ONLY MAX900)

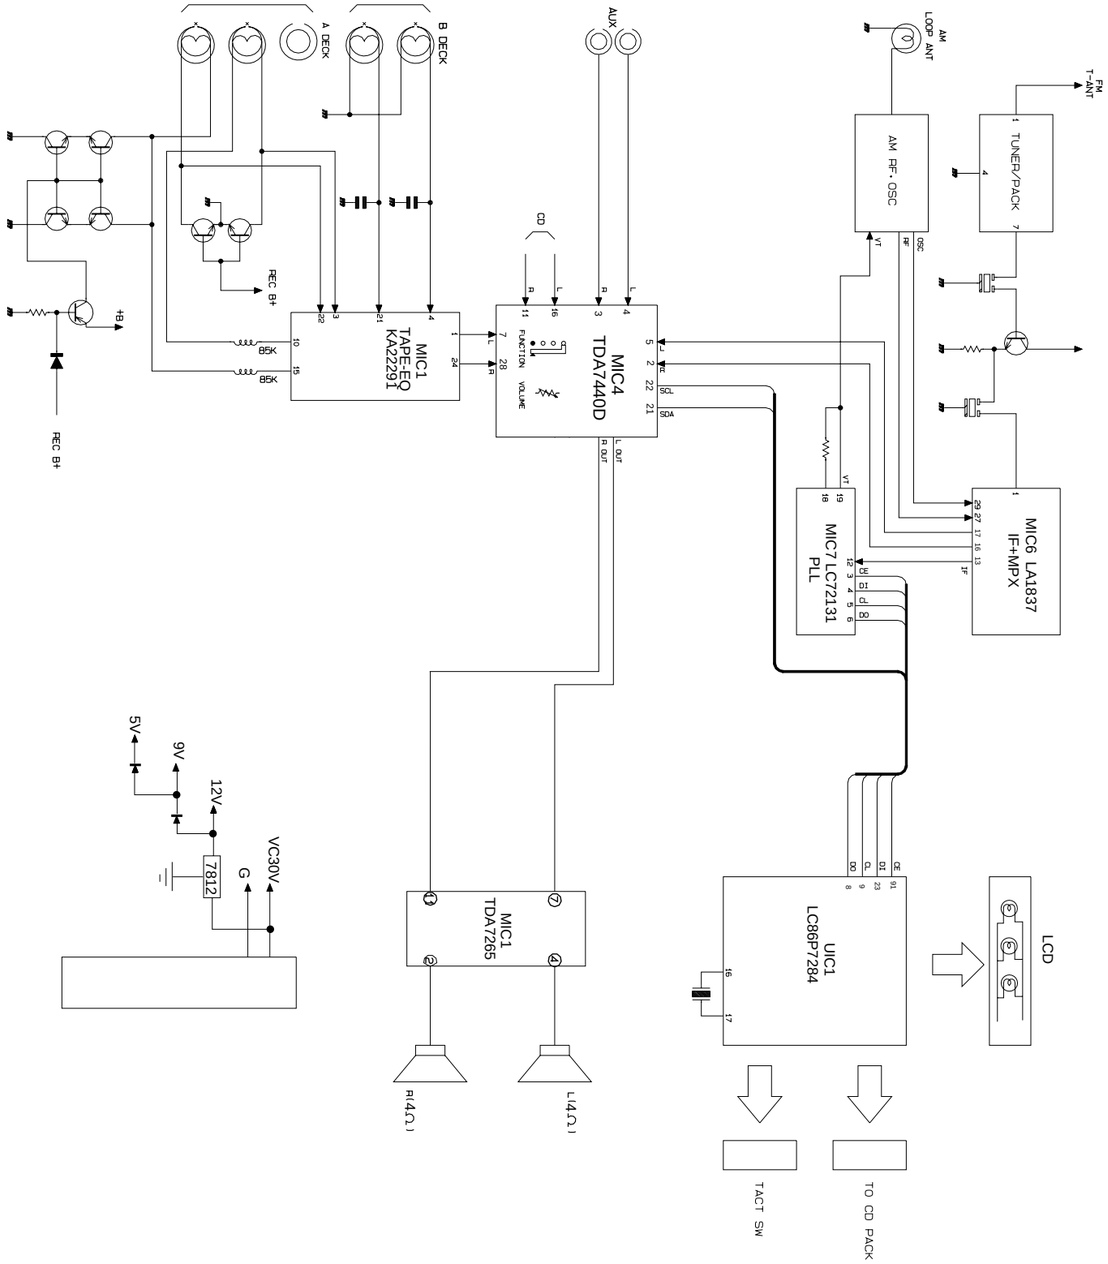

4-2 Main(ONLY MAX920)

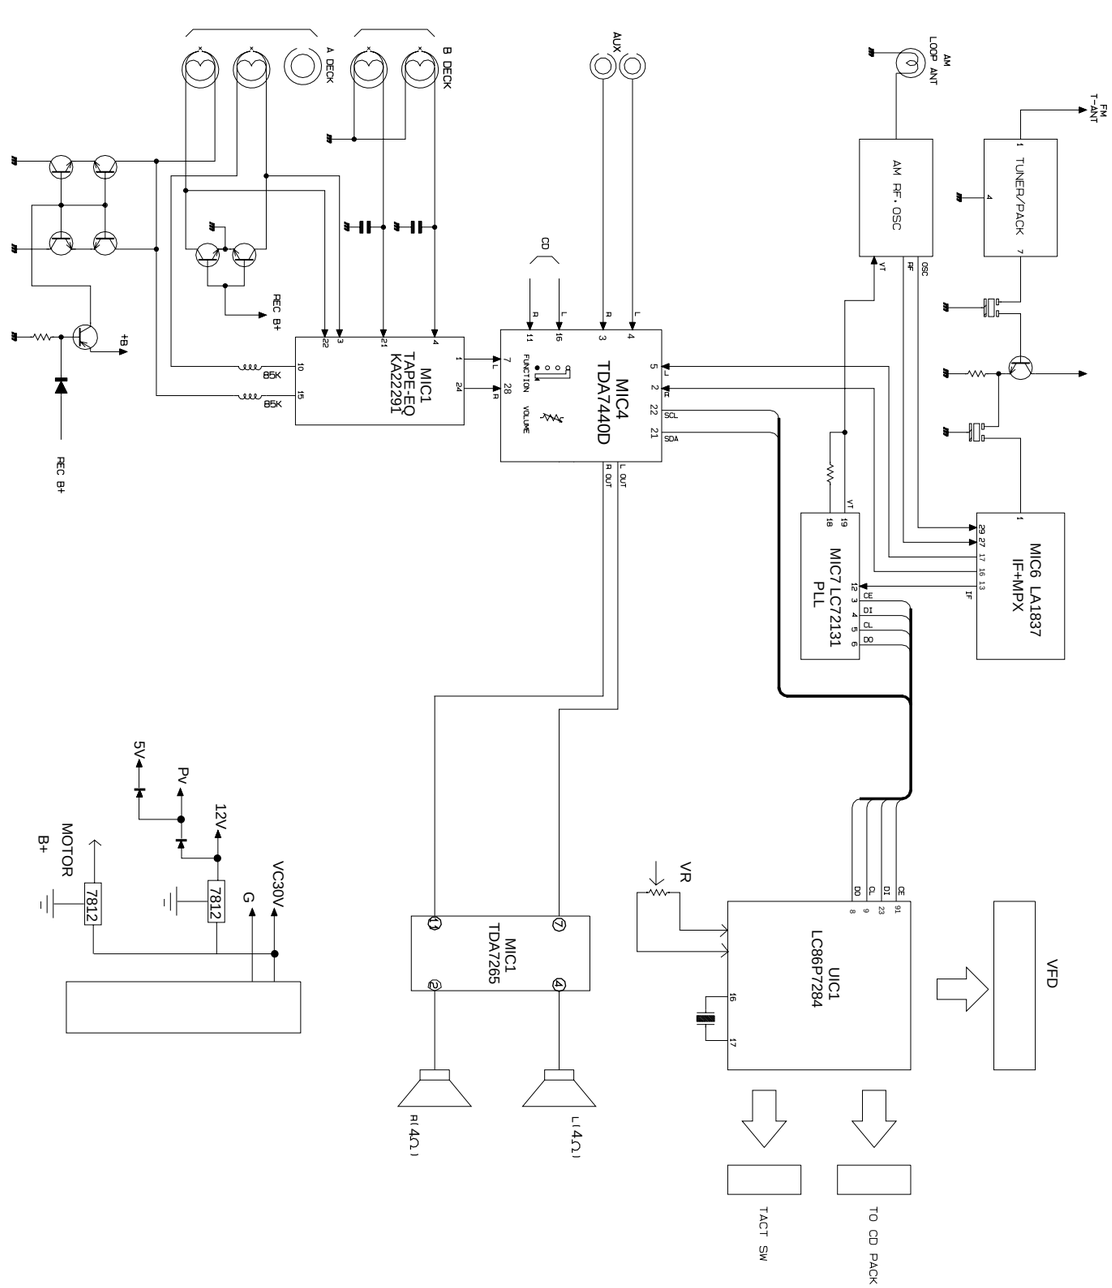

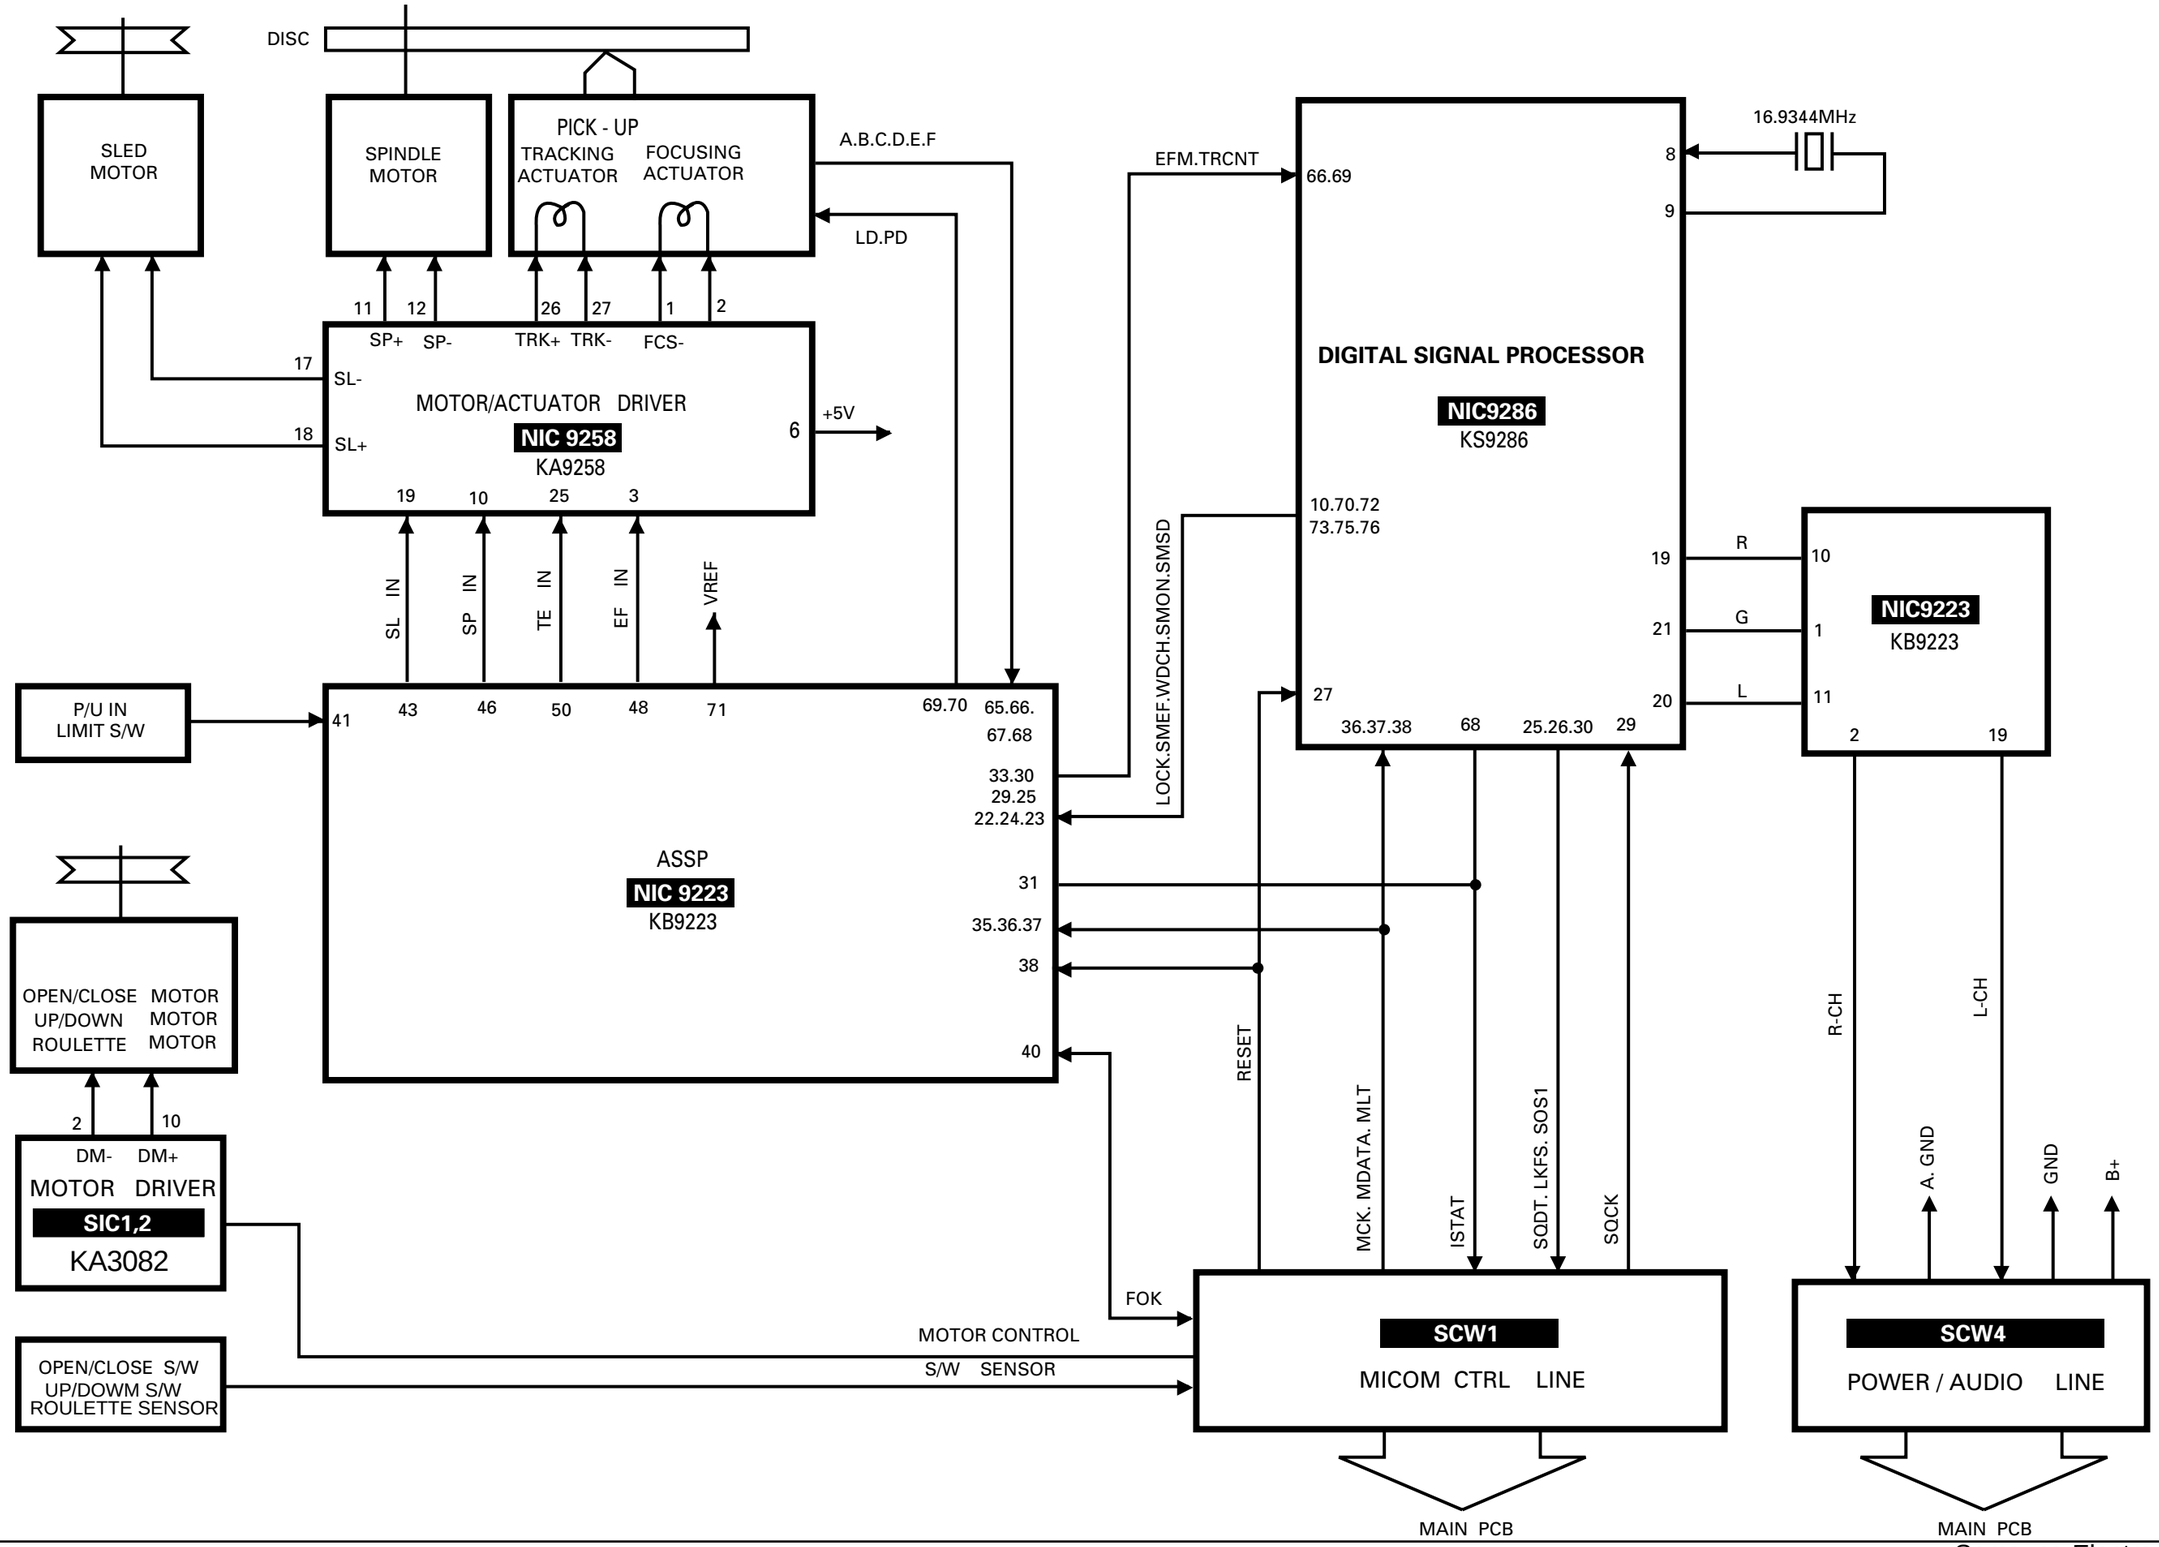
DISC
SLED MOTOR
SPINDLE MOTOR
PICK - UP
TRACKING ACTUATOR
FOCUSING ACTUATOR
A.B.C.D.E.F
LD.PD
11 12 26 27 1 2
SP+ SP- TRK+ TRK- FCS-
17
SL-
18
SL+
MOTOR/ACTUATOR DRIVER
NIC 9258
KA9258
6
+5V
19 10 25 3
SL IN
SP IN
TE IN
EF IN
VREF
P/U IN LIMIT S/W
41
43 46 50 48 71
69.70 65.66. 67.68
33.30 29.25 22.24.23
ASSP
NIC 9223
KB9223
31
35.36.37
38
40
EFM.TRCNT
LOCK.SMEF.WDCH.SMON.SMSD
RESET
MCK. MDATA. MLT
ISTAT
SQDT. LKFS. SOS1
SQCK
66.69
8
9
16.9344MHz
DIGITAL SIGNAL PROCESSOR
NIC9286
KS9286
10.70.72
73.75.76
19
21
27
20
R
G
L
36.37.38
68
25.26.30
29
NIC9223
KB9223
10
1
11
2
19
R-CH
L-CH
A. GND
GND
B+
OPEN/CLOSE MOTOR
UP/DOWN MOTOR
ROULETTE MOTOR
2
10
DM- DM+
MOTOR DRIVER
SIC1,2
KA3082
OPEN/CLOSE S/W
UP/DOWM S/W
ROULETTE SENSOR
FOK
MOTOR CONTROL
S/W SENSOR
SCW1
MICOM CTRL LINE
SCW4
POWER / AUDIO LINE
MAIN PCB
MAIN PCB

5. Printed Circuit Board Diagram

5-1 MAIN(COMMON)

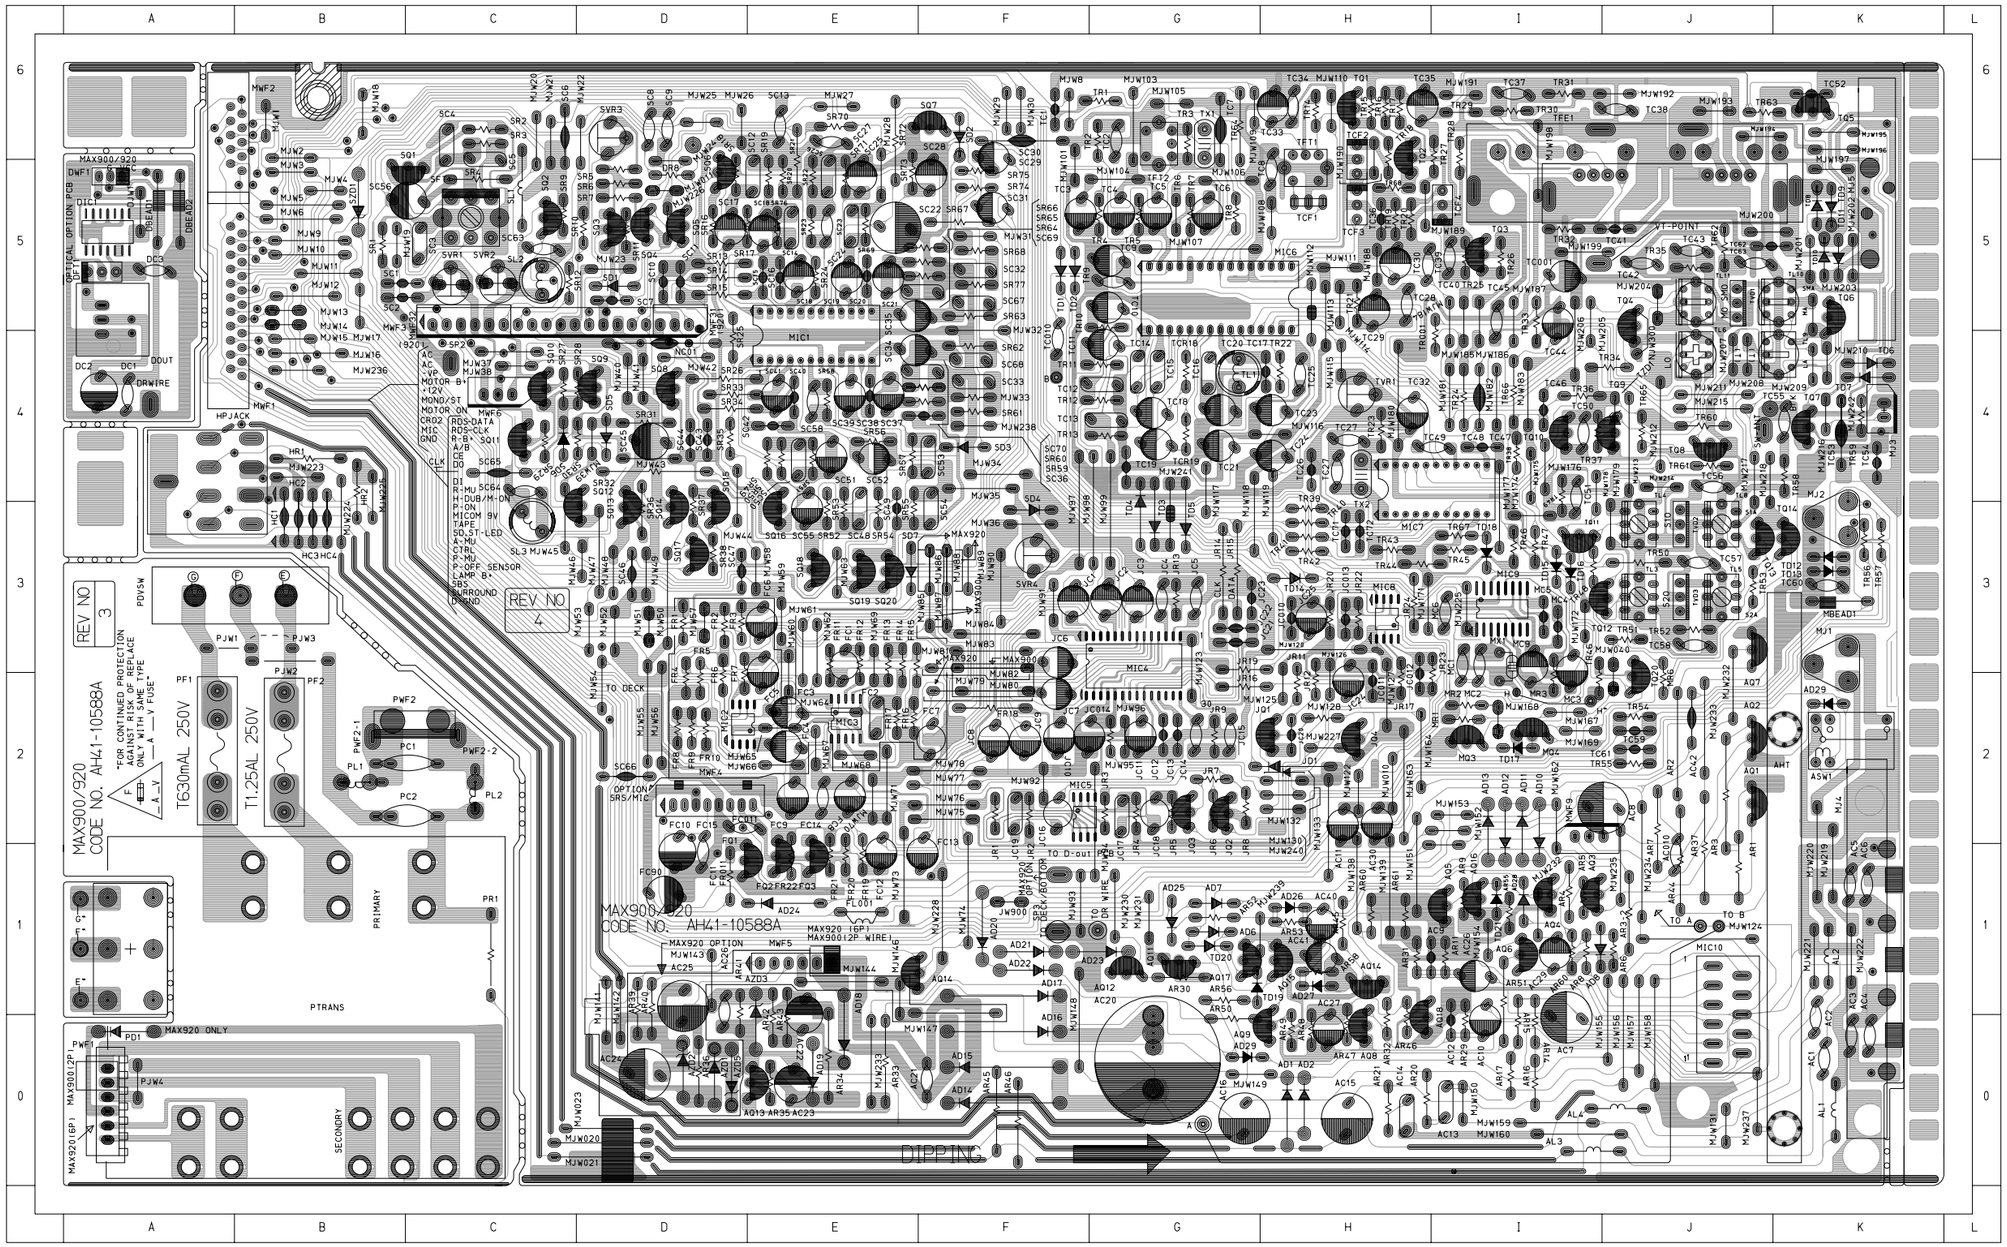

*** DIODE ***

AD1 (H0)	AQ1 (J2)
AD10 (I1)	AQ11 (G1)
AD11 (I2)	AQ12 (G1)
AD12 (I1)	AQ13 (E0)
AD13 (I2)	AQ14 (F1)
AD14 (F0)	AQ14 (H1)
AD15 (F0)	AQ15 (H1)
AD16 (F0)	AQ16 (I1)
AD17 (F1)	AQ17 (G1)
AD18 (E0)	AQ18 (H0)
AD19 (E0)	AQ2 (J2)
AD2 (H0)	AQ3 (I1)
AD21 (F1)	AQ4 (I1)
AD22 (F1)	AQ5 (I1)
AD23 (G1)	AQ6 (I1)
AD24 (D1)	AQ7 (J3)
AD25 (G1)	AQ8 (H0)
AD26 (H1)	AQ9 (H0)
AD27 (H1)	FQ1 (D1)
AD28 (I1)	FQ2 (E2)
AD29 (H0)	FQ3 (E2)
AD29 (K2)	JQ1 (H2)
AD6 (G1)	JQ2 (G2)
AD7 (G1)	JQ3 (G2)
AD8 (I1)	JQ4 (H2)
AZD1 (D0)	MQ3 (I2)
AZD2 (D0)	MQ4 (I2)
AZD3 (E1)	SQ1 (C5)
AZD5 (D0)	SQ10 (C4)
JD1 (G2)	SQ11 (C4)
JW900 (F1)	SQ12 (D3)
PD1 (A0)	SQ13 (D4)
SD1 (D5)	SQ14 (D4)
SD2 (F6)	SQ15 (D4)
SD3 (F4)	SQ16 (E3)
SD4 (F3)	SQ17 (D3)
SD5 (D4)	SQ18 (E3)
SD6 (C4)	SQ19 (E3)
SD7 (E3)	SQ2 (C5)
SZD1 (B5)	SQ20 (E3)
TD1 (F5)	SQ3 (D5)
TD10 (K5)	SQ4 (D5)
TD11 (K5)	SQ5 (D5)
TD12 (K3)	SQ6 (D6)
TD13 (K3)	SQ7 (E6)
TD14 (H3)	SQ8 (D4)
TD15 (I3)	SQ9 (D4)
TD16 (I3)	TQ1 (H6)
TD17 (I2)	TQ10 (I4)
TD18 (I3)	TQ11 (I3)
TD19 (G1)	TQ12 (J3)
TD2 (F5)	TQ13 (J3)
TD20 (G1)	TQ14 (K3)
TD21 (I1)	TQ2 (H5)
TD3 (G3)	TQ20 (J3)
TD4 (G4)	TQ3 (I5)
TD5 (G3)	TQ4 (J4)
TD6 (K4)	TQ5 (K6)
TD7 (K4)	TQ6 (K5)
TD8 (K5)	TQ7 (K4)
TD9 (K5)	TQ8 (J4)
	TQ9 (J4)

*** TR ***

*** IC&WAFER ***

DWF1 (A5)	PDVSW (B3)
MJ3 (K4)	PWF1 (A0)
MWF3 (C5)	TCF1 (H5)
MWF4 (D2)	TFT1 (H5)
MWF5 (E1)	TFT2 (G6)
MWF6 (C4)	
MWF9 (I2)	

5-2 FRONT(Only MAX900)

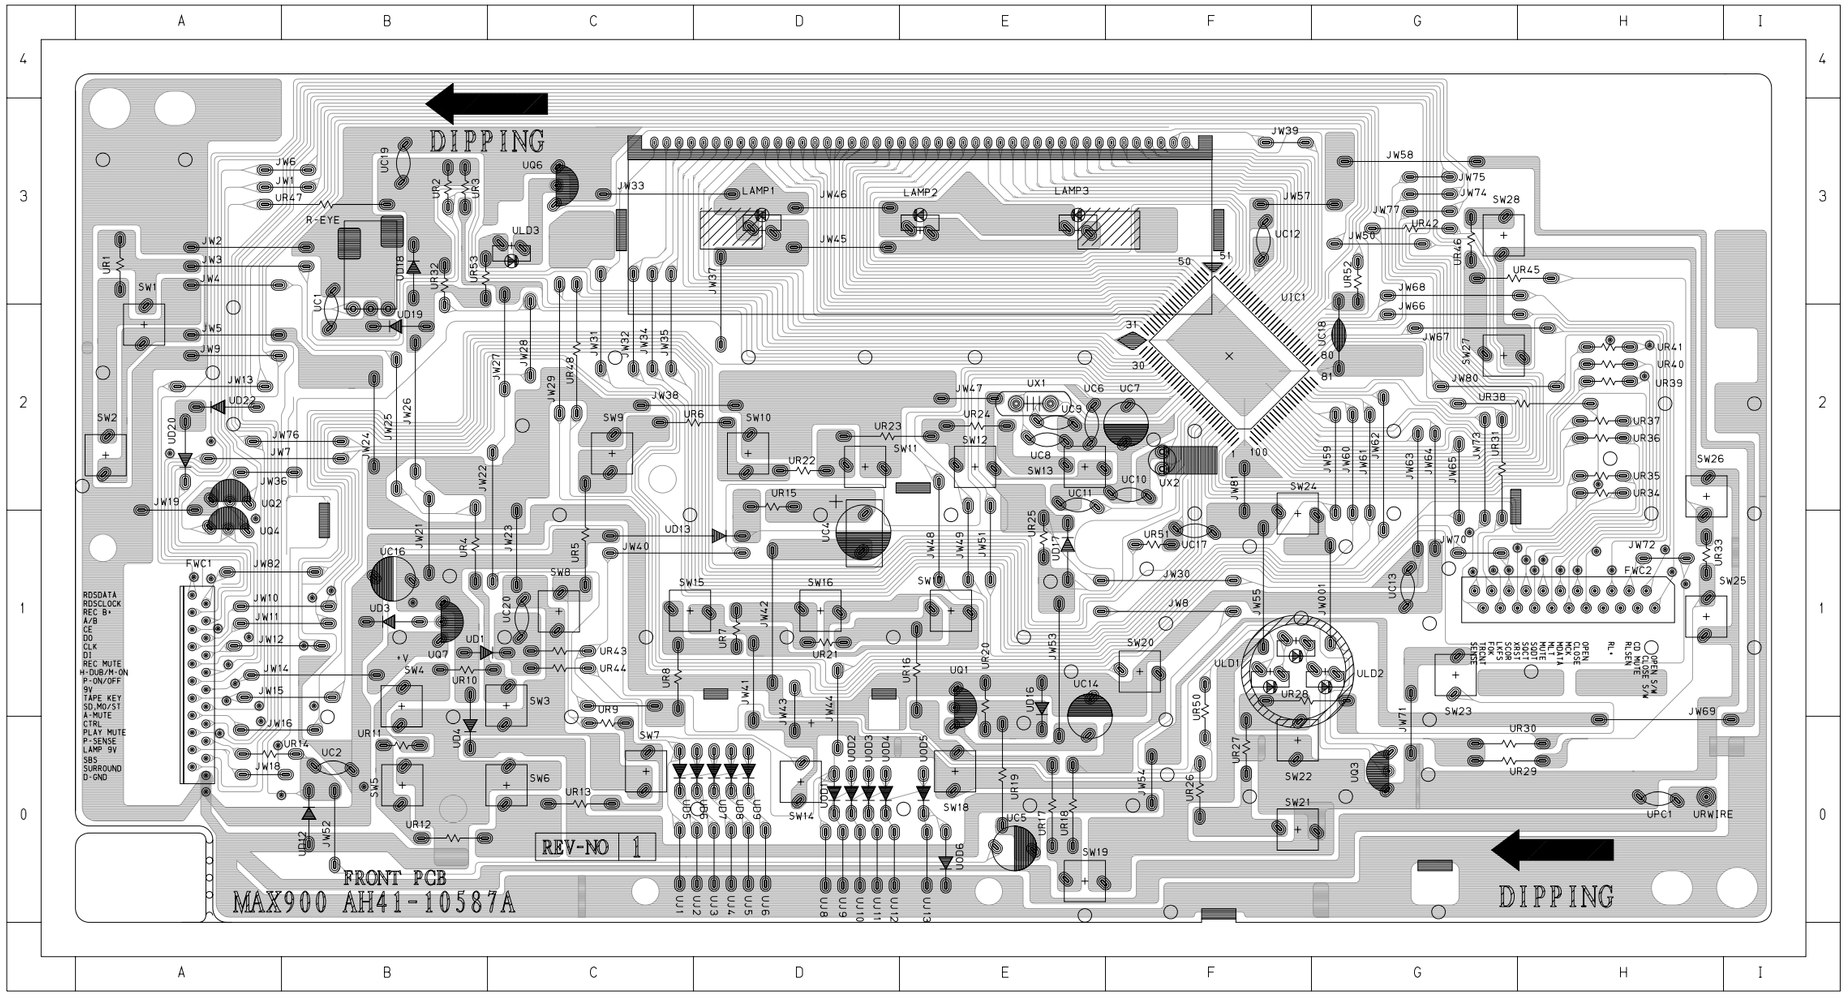

*** CONDENSER ***

UC1 (B2)
UC10 (F2)
UC11 (E2)
UC12 (F3)
UC13 (G1)
UC14 (E0)
UC16 (B1)
UC17 (F1)
UC18 (G2)
UC19 (B3)
UC2 (B0)
UC20 (C1)
UC4 (D1)
UC5 (E0)
UC6 (E2)
UC7 (F2)
UC8 (E2)
UC9 (E2)
UPC1 (H0)

*** DIODE ***

UD1 (C1)
UD12 (B0)
UD13 (D1)
UD16 (E0)
UD17 (E1)
UD18 (B3)
UD19 (B2)
UD20 (A2)
UD22 (A2)
UD3 (B1)
UD4 (B0)
UD5 (C0)
UD6 (D0)
UD7 (D0)
UD8 (D0)
UD9 (D0)
UOD1 (D0)
UOD2 (D0)
UOD3 (D0)
UOD4 (D0)
UOD5 (E0)
UOD6 (E0)

*** TR ***

UQ1 (E1)
UQ2 (A2)
UQ3 (G0)
UQ4 (A1)
UQ6 (C3)
UQ7 (B1)

*** IC&WAFER ***

SW1 (A2)
SW10 (D2)
SW11 (D2)
SW12 (E2)
SW13 (E2)
SW14 (D0)
SW15 (C1)
SW16 (D1)
SW17 (E1)
SW18 (E0)
SW19 (E0)
SW2 (A2)
SW20 (F1)
SW21 (F0)
SW22 (F0)
SW23 (G1)
SW24 (F1)
SW25 (H1)
SW26 (H2)
SW27 (G2)
SW28 (G3)
SW3 (C1)
SW4 (B1)
SW5 (B0)
SW6 (C0)
SW7 (C0)
SW8 (C1)
SW9 (C2)

5-3 FRONT(Only MAX920)

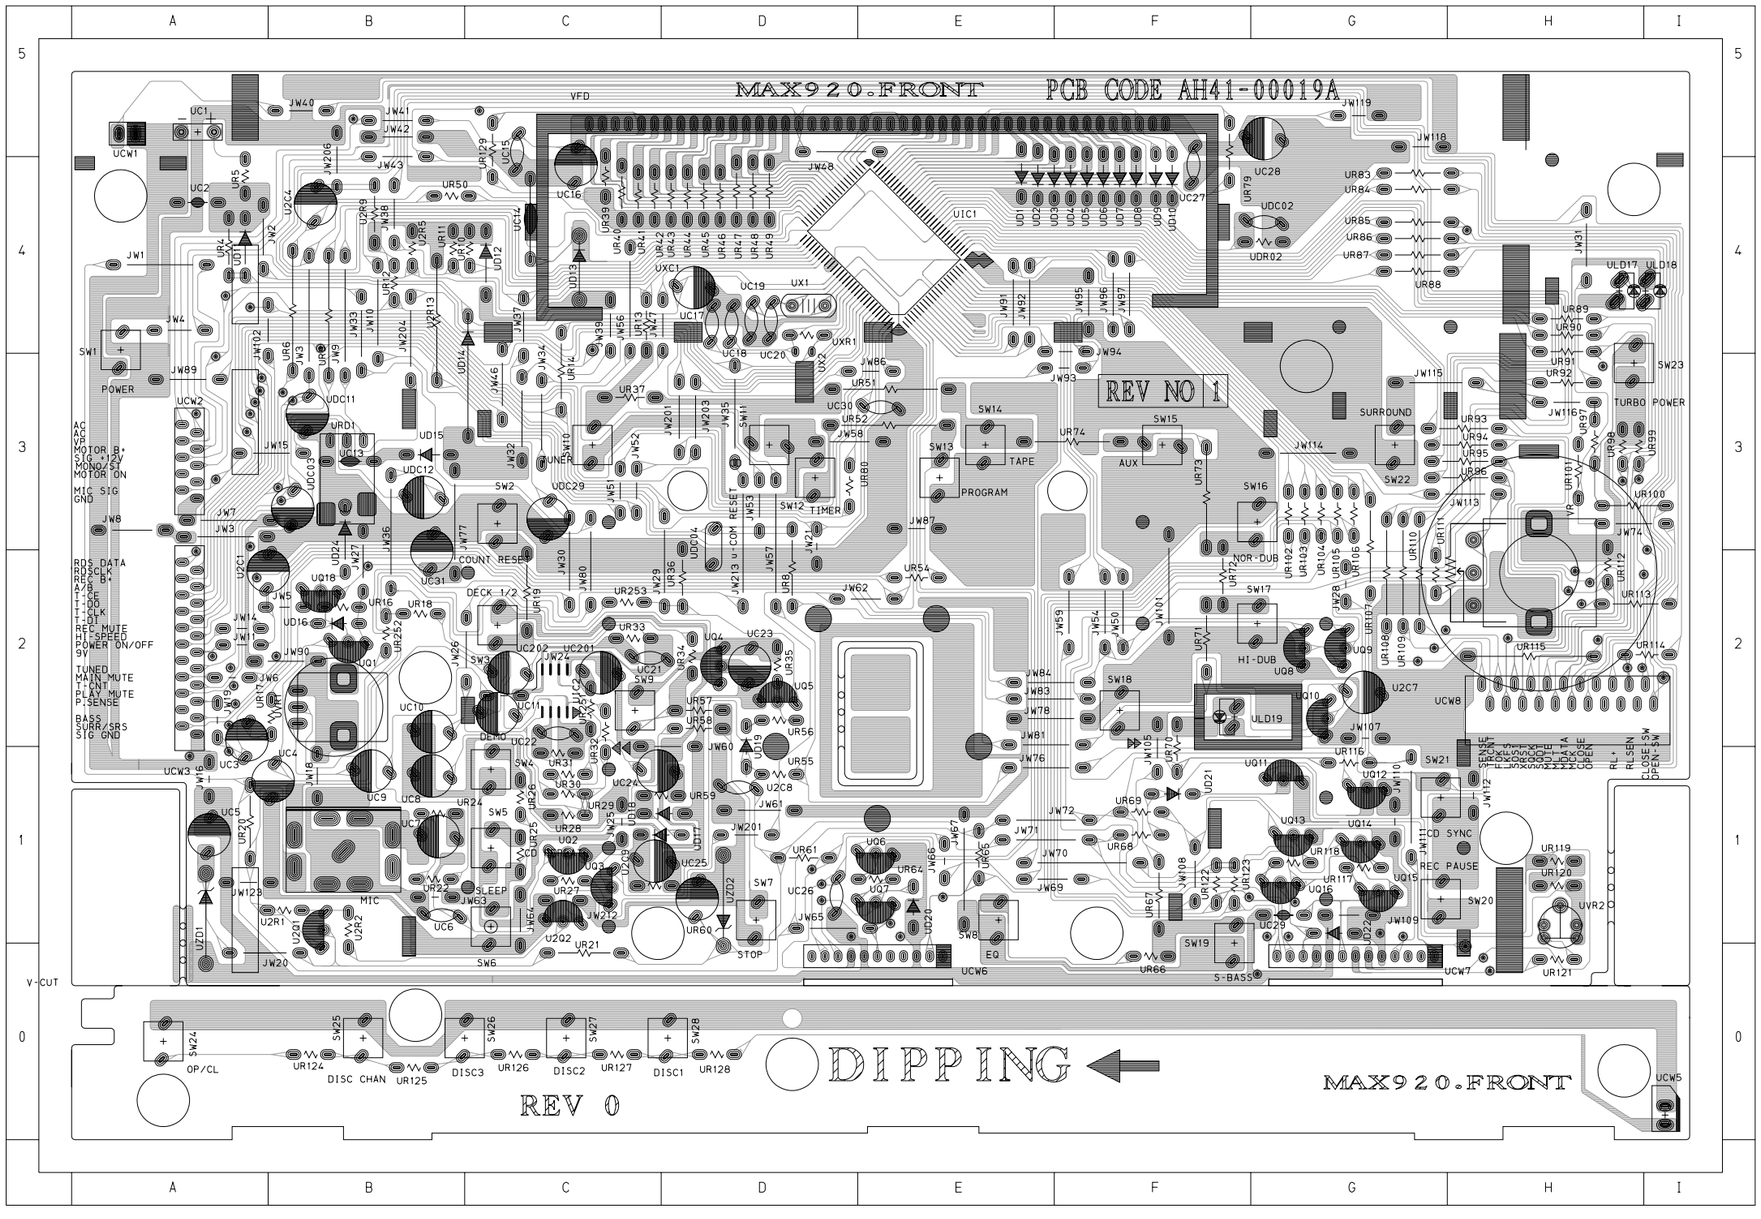

*** CONDENSER ***

U2C1 (B2)
U2C4 (B4)
U2C7 (G2)
U2C8 (D1)
U2C9 (D1)
UC10 (B2)
UC11 (C2)
UC13 (B3)
UC14 (C4)
UC15 (C4)
UC16 (C4)
UC17 (D4)
UC18 (D4)
UC19 (D4)
UC2 (A4)
UC20 (D4)
UC201 (C2)
UC202 (C2)
UC21 (C2)
UC22 (C2)
UC23 (D2)
UC24 (C1)
UC25 (C1)
UC26 (D1)
UC27 (F4)
UC28 (G5)
UC29 (G1)
UC3 (A1)
UC30 (E3)
UC31 (B2)
UC4 (B1)
UC5 (A1)
UC6 (B1)
UC7 (B1)
UC8 (B1)
UC9 (B1)
UDC02 (F4)
UDC03 (B3)
UDC04 (D2)
UDC11 (B3)
UDC12 (B3)
UDC29 (C3)
UXC1 (D4)

*** DIODE ***

UD1 (E4)
UD10 (F4)
UD11 (A4)
UD12 (C4)
UD13 (C4)
UD14 (C4)
UD15 (B3)
UD16 (B2)
UD17 (C1)
UD18 (C1)
UD19 (D2)
UD2 (E4)
UD20 (E1)
UD21 (F1)
UD22 (G1)
UD24 (B3)
UD3 (F4)
UD4 (F4)
UD5 (F4)
UD6 (F4)
UD7 (F4)
UD8 (F4)
UD9 (F4)
UZD1 (A1)
UZD2 (D0)

*** TR ***

U2Q1 (B0)
U2Q2 (C1)
UQ1 (B2)
UQ10 (G2)
UQ11 (G1)
UQ12 (G1)
UQ13 (G1)
UQ14 (G1)
UQ15 (G1)
UQ16 (G1)
UQ18 (B2)
UQ2 (C1)
UQ3 (C1)
UQ4 (D2)
UQ5 (D2)
UQ6 (E1)
UQ7 (E1)
UQ8 (G2)
UQ9 (G2)

*** IC&WAFER ***

SW1 (A4)
SW10 (C3)
SW11 (D3)
SW12 (D3)
SW13 (E3)
SW14 (E3)
SW15 (F3)
SW16 (G3)
SW17 (G2)
SW18 (F2)
SW19 (F1)
SW2 (C3)
SW20 (G1)
SW21 (G1)
SW22 (G3)
SW23 (H3)
SW24 (A0)
SW25 (B0)
SW26 (C0)
SW27 (C0)
SW28 (D0)
SW3 (C2)
SW4 (C1)
SW5 (C1)
SW6 (C1)
SW7 (D1)
SW8 (E1)
SW9 (C2)
UC1 (A5)
UCW1 (A5)
UCW5 (I0)
UCW6 (E0)
UCW7 (G0)
UIC1 (E4)

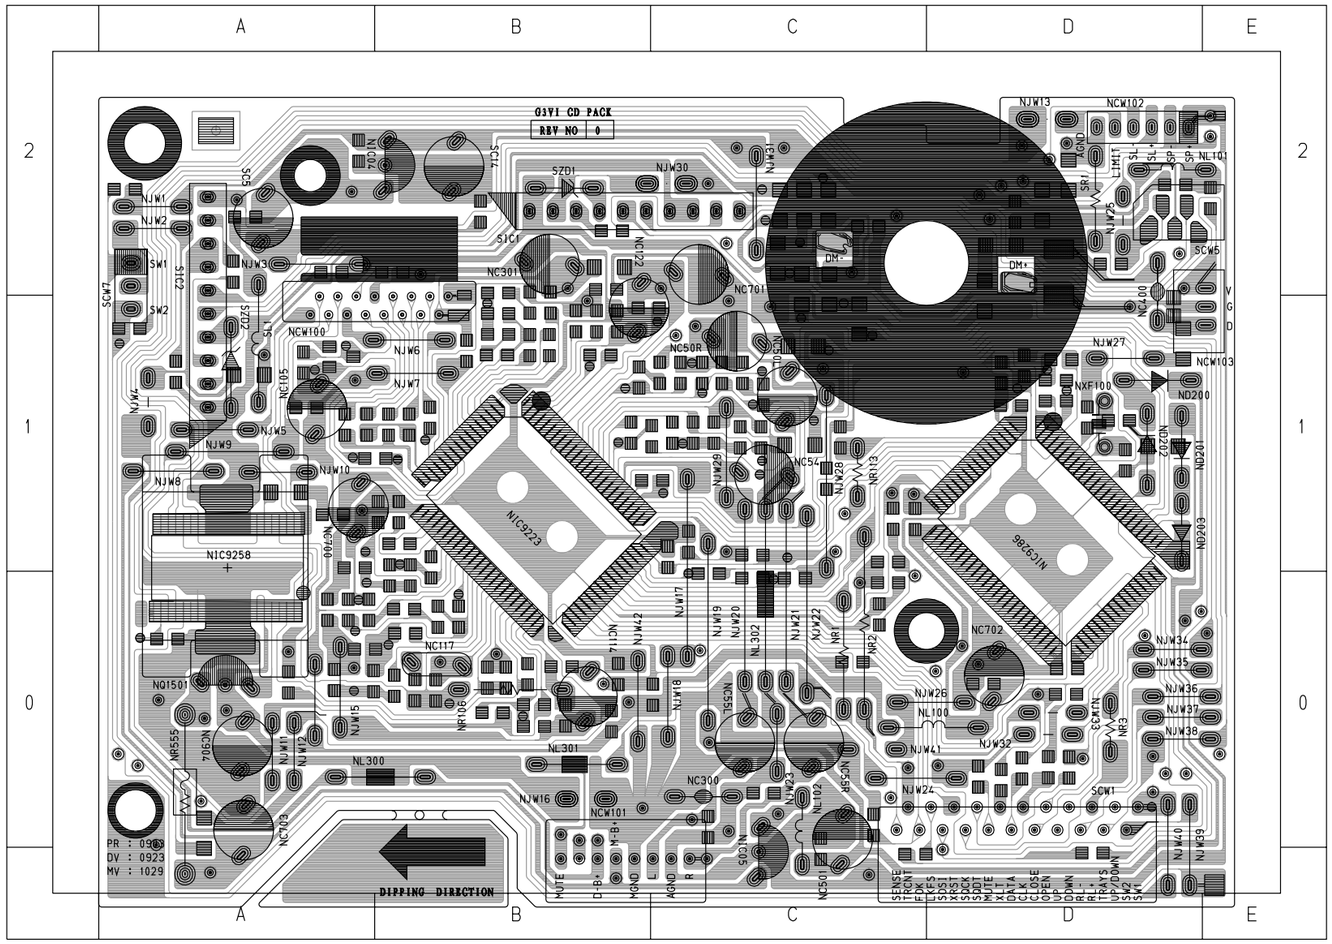
A
B
C
D
E
2
1
0
G3V1 CD PACK
REV NO 0
SZD1
NJW30
NJW13
NCW102
NJW1
NJW2
NJW3
SW1
SW2
SCW2
SIC1
SIC2
NC301
NC702
NC701
NCW100
NJW6
NJW7
NJW5
NJW9
NJW10
NJW8
NC105
NC50R
NJW27
NCW103
NXF100
ND200
ND202
NC54
NJW28
NR13
NIC9223
NIC9258
NIC9286
NC117
NJW42
NJW17
NJW19
NJW20
NJW21
NJW22
NJW23
NJW24
NJW25
NJW26
NJW32
NJW33
NJW34
NJW35
NJW36
NJW37
NJW38
NJW39
NJW40
NJW41
NJW18
NJW16
NQ1501
NR555
NC703
NC904
NL300
NL301
NL100
NL1501
NC300
NCW101
NC501
NC503
SCW1
SCW5
SCW7
SC5
NC400
NC700
NC703
NC904
NC1501
NC1502
NC1503
NC1504
NC1505
NC1506
NC1507
NC1508
NC1509
NC1510
NC1511
NC1512
NC1513
NC1514
NC1515
NC1516
NC1517
NC1518
NC1519
NC1520
NC1521
NC1522
NC1523
NC1524
NC1525
NC1526
NC1527
NC1528
NC1529
NC1530
NC1531
NC1532
NC1533
NC1534
NC1535
NC1536
NC1537
NC1538
NC1539
NC1540

6. Wiring Diagram

6-1 MAX900

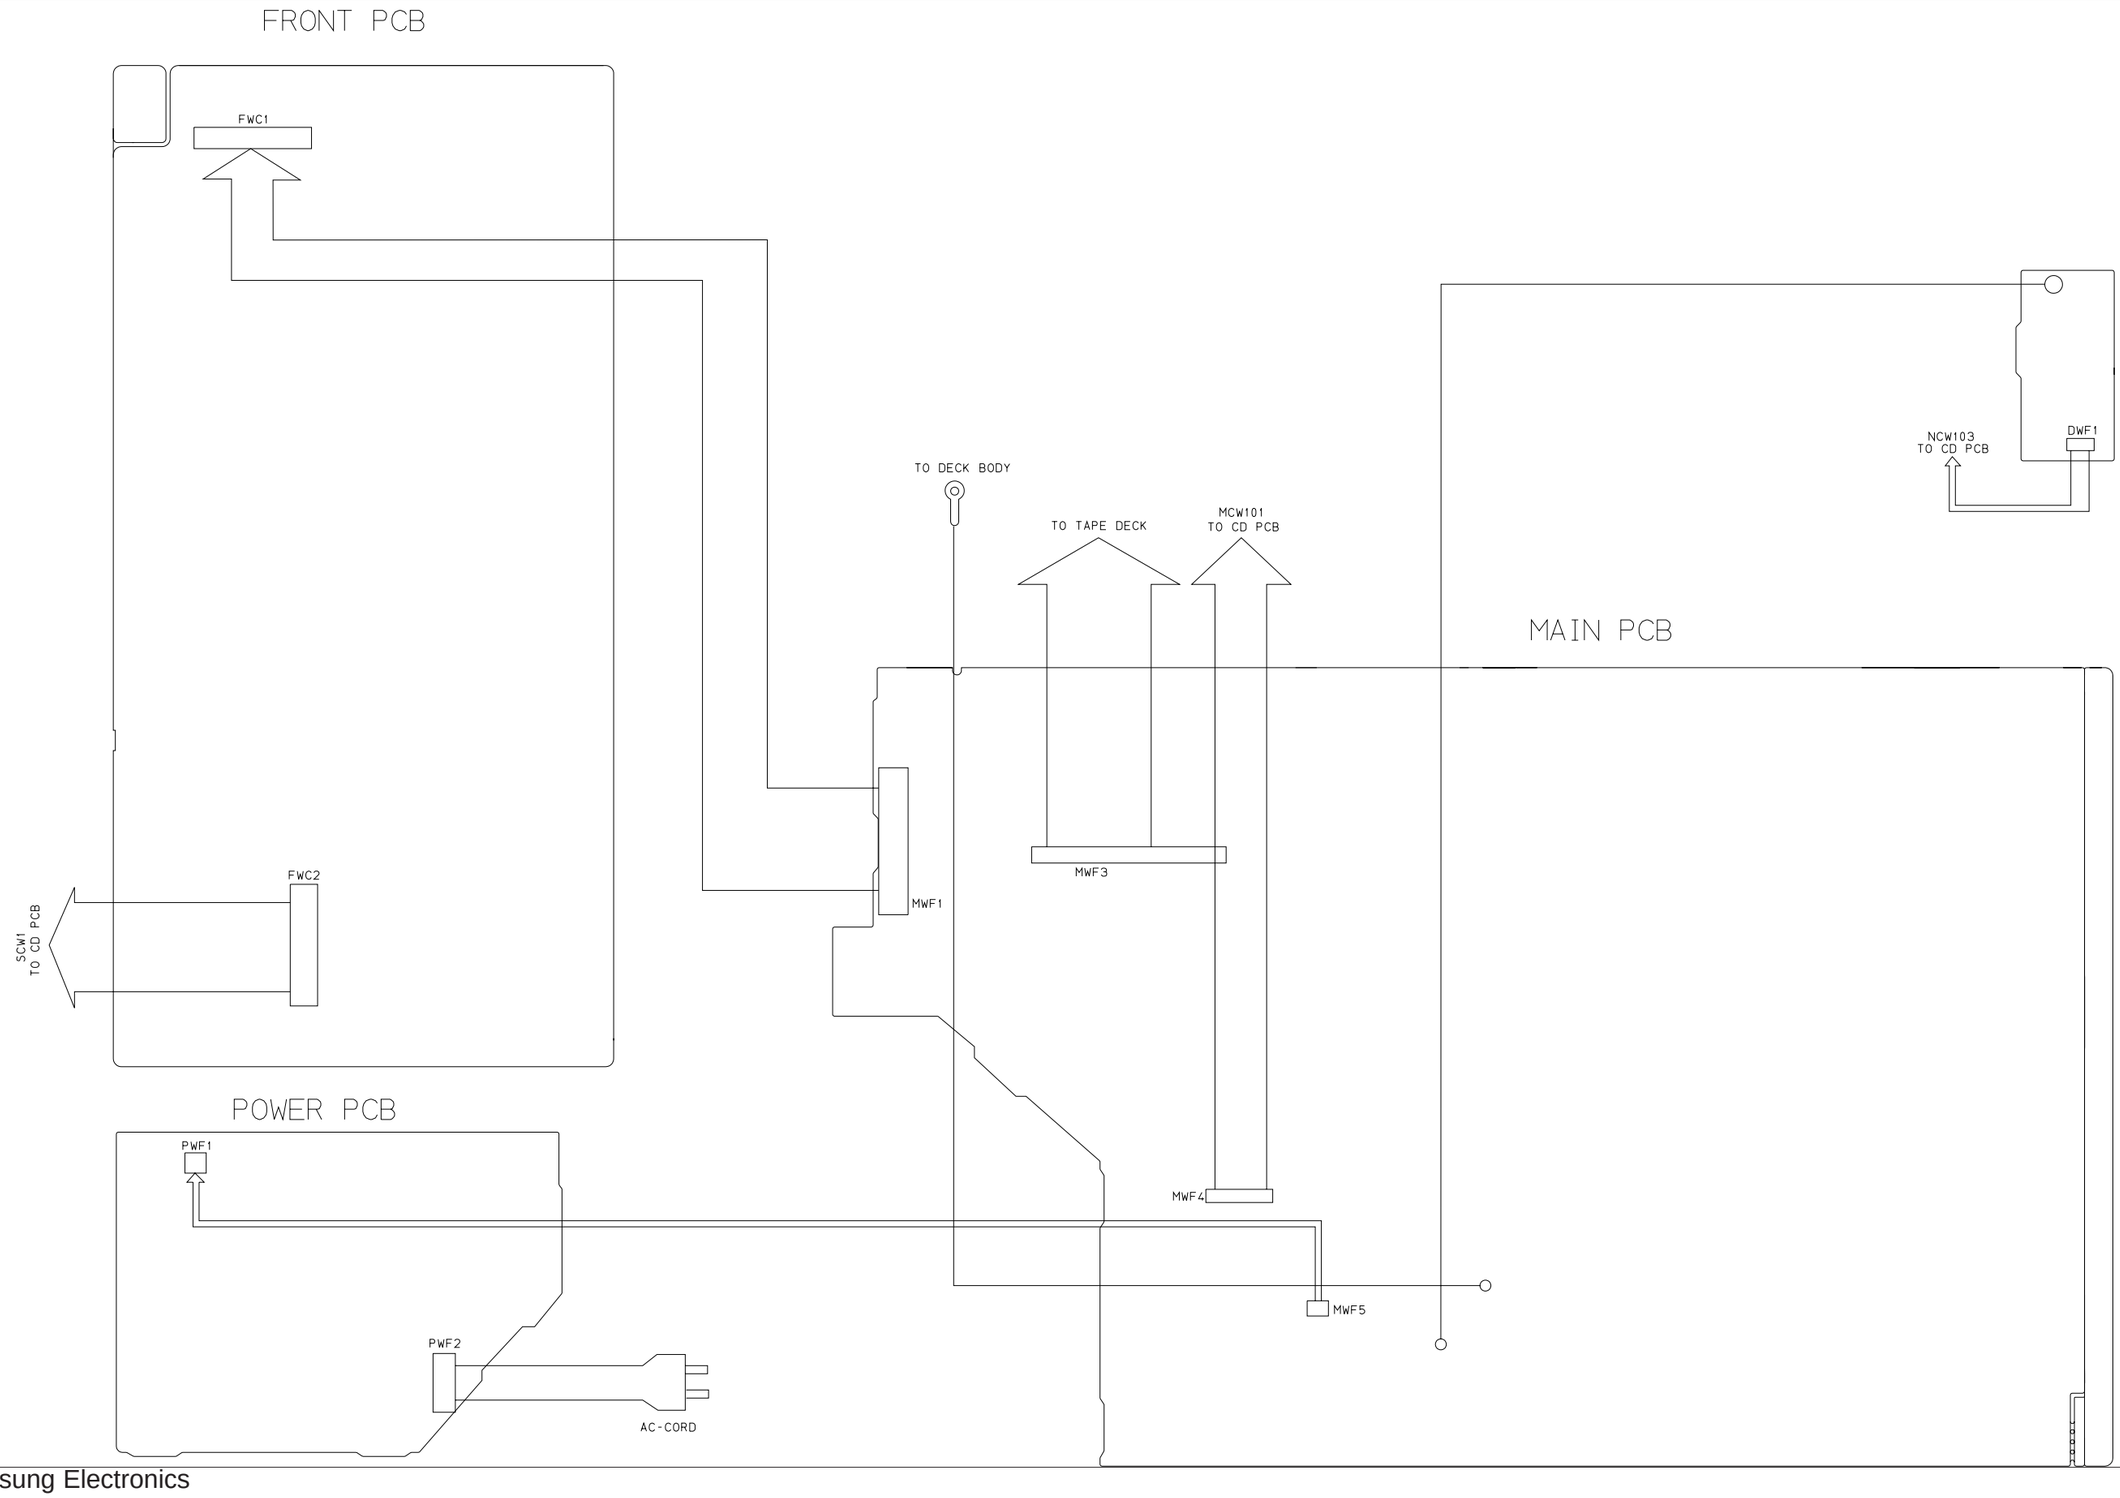

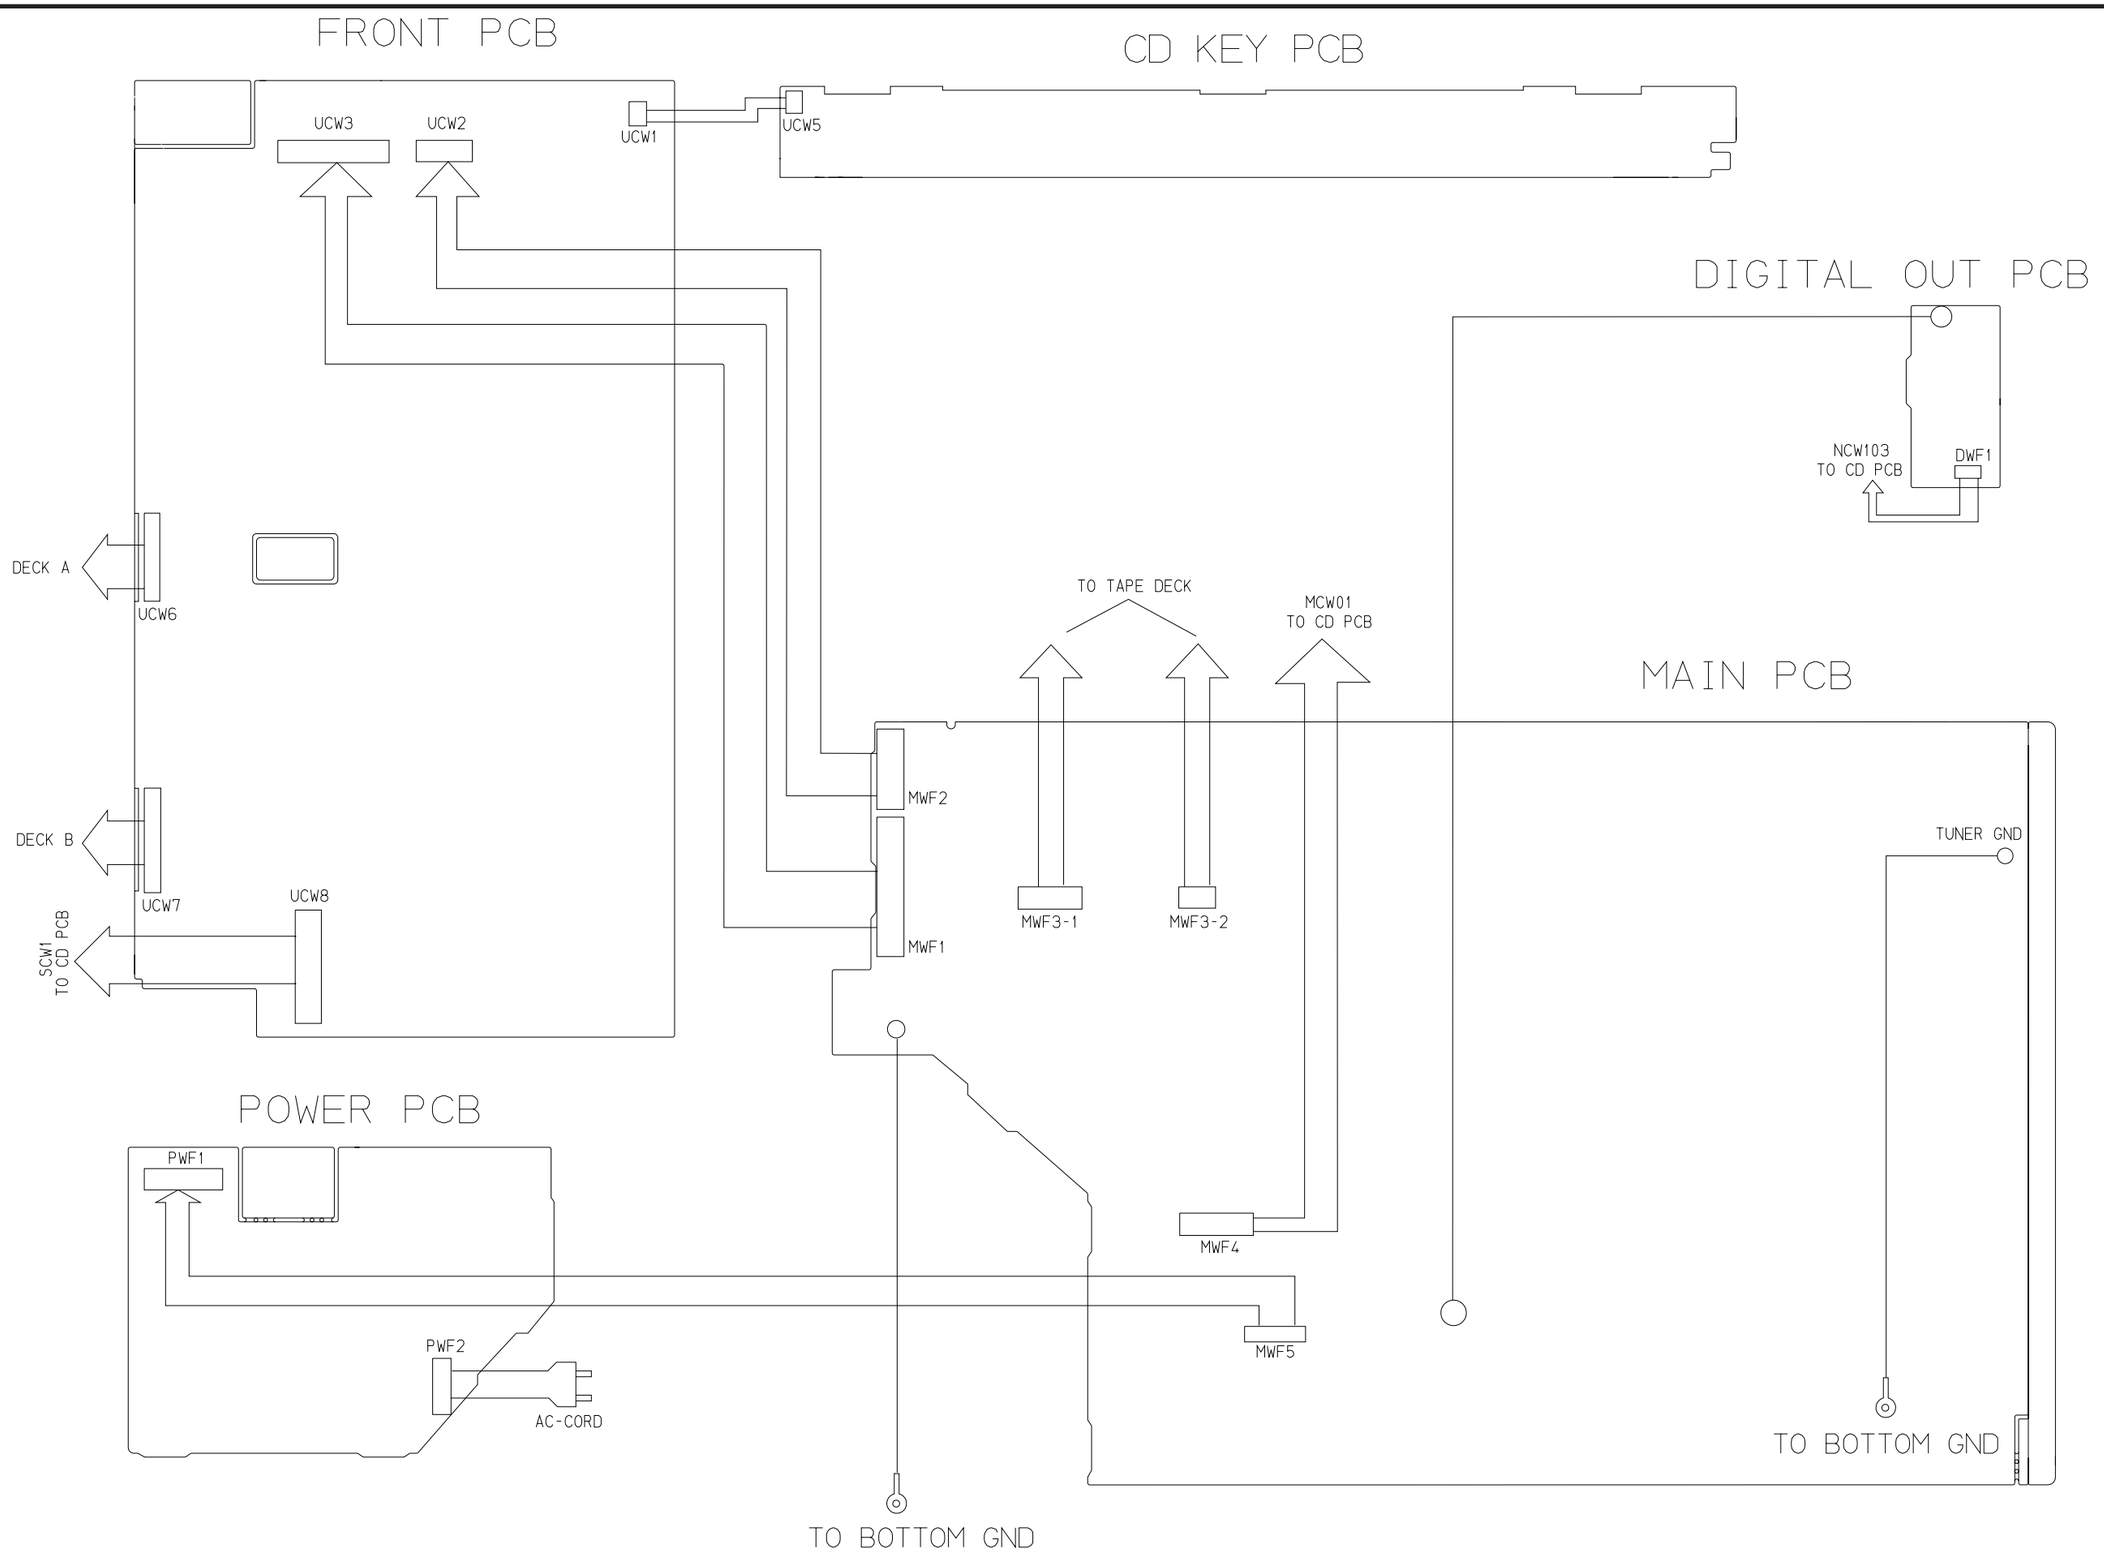
FRONT PCB
CD KEY PCB
UCW3
UCW2
UCW1
UCW5
DIGITAL OUT PCB
NCW103
TO CD PCB
DWF1
DECK A
UCW6
TO TAPE DECK
MCW01
TO CD PCB
MAIN PCB
MWF2
DECK B
UCW7
UCW8
SCW1
TO CD PCB
MWF3-1
MWF3-2
MWF1
TUNER GND
POWER PCB
PWF1
MWF4
MWF5
PWF2
AC-CORD
TO BOTTOM GND
TO BOTTOM GND

7. Schematic Diagram

7-1 CD Part(COMMON)

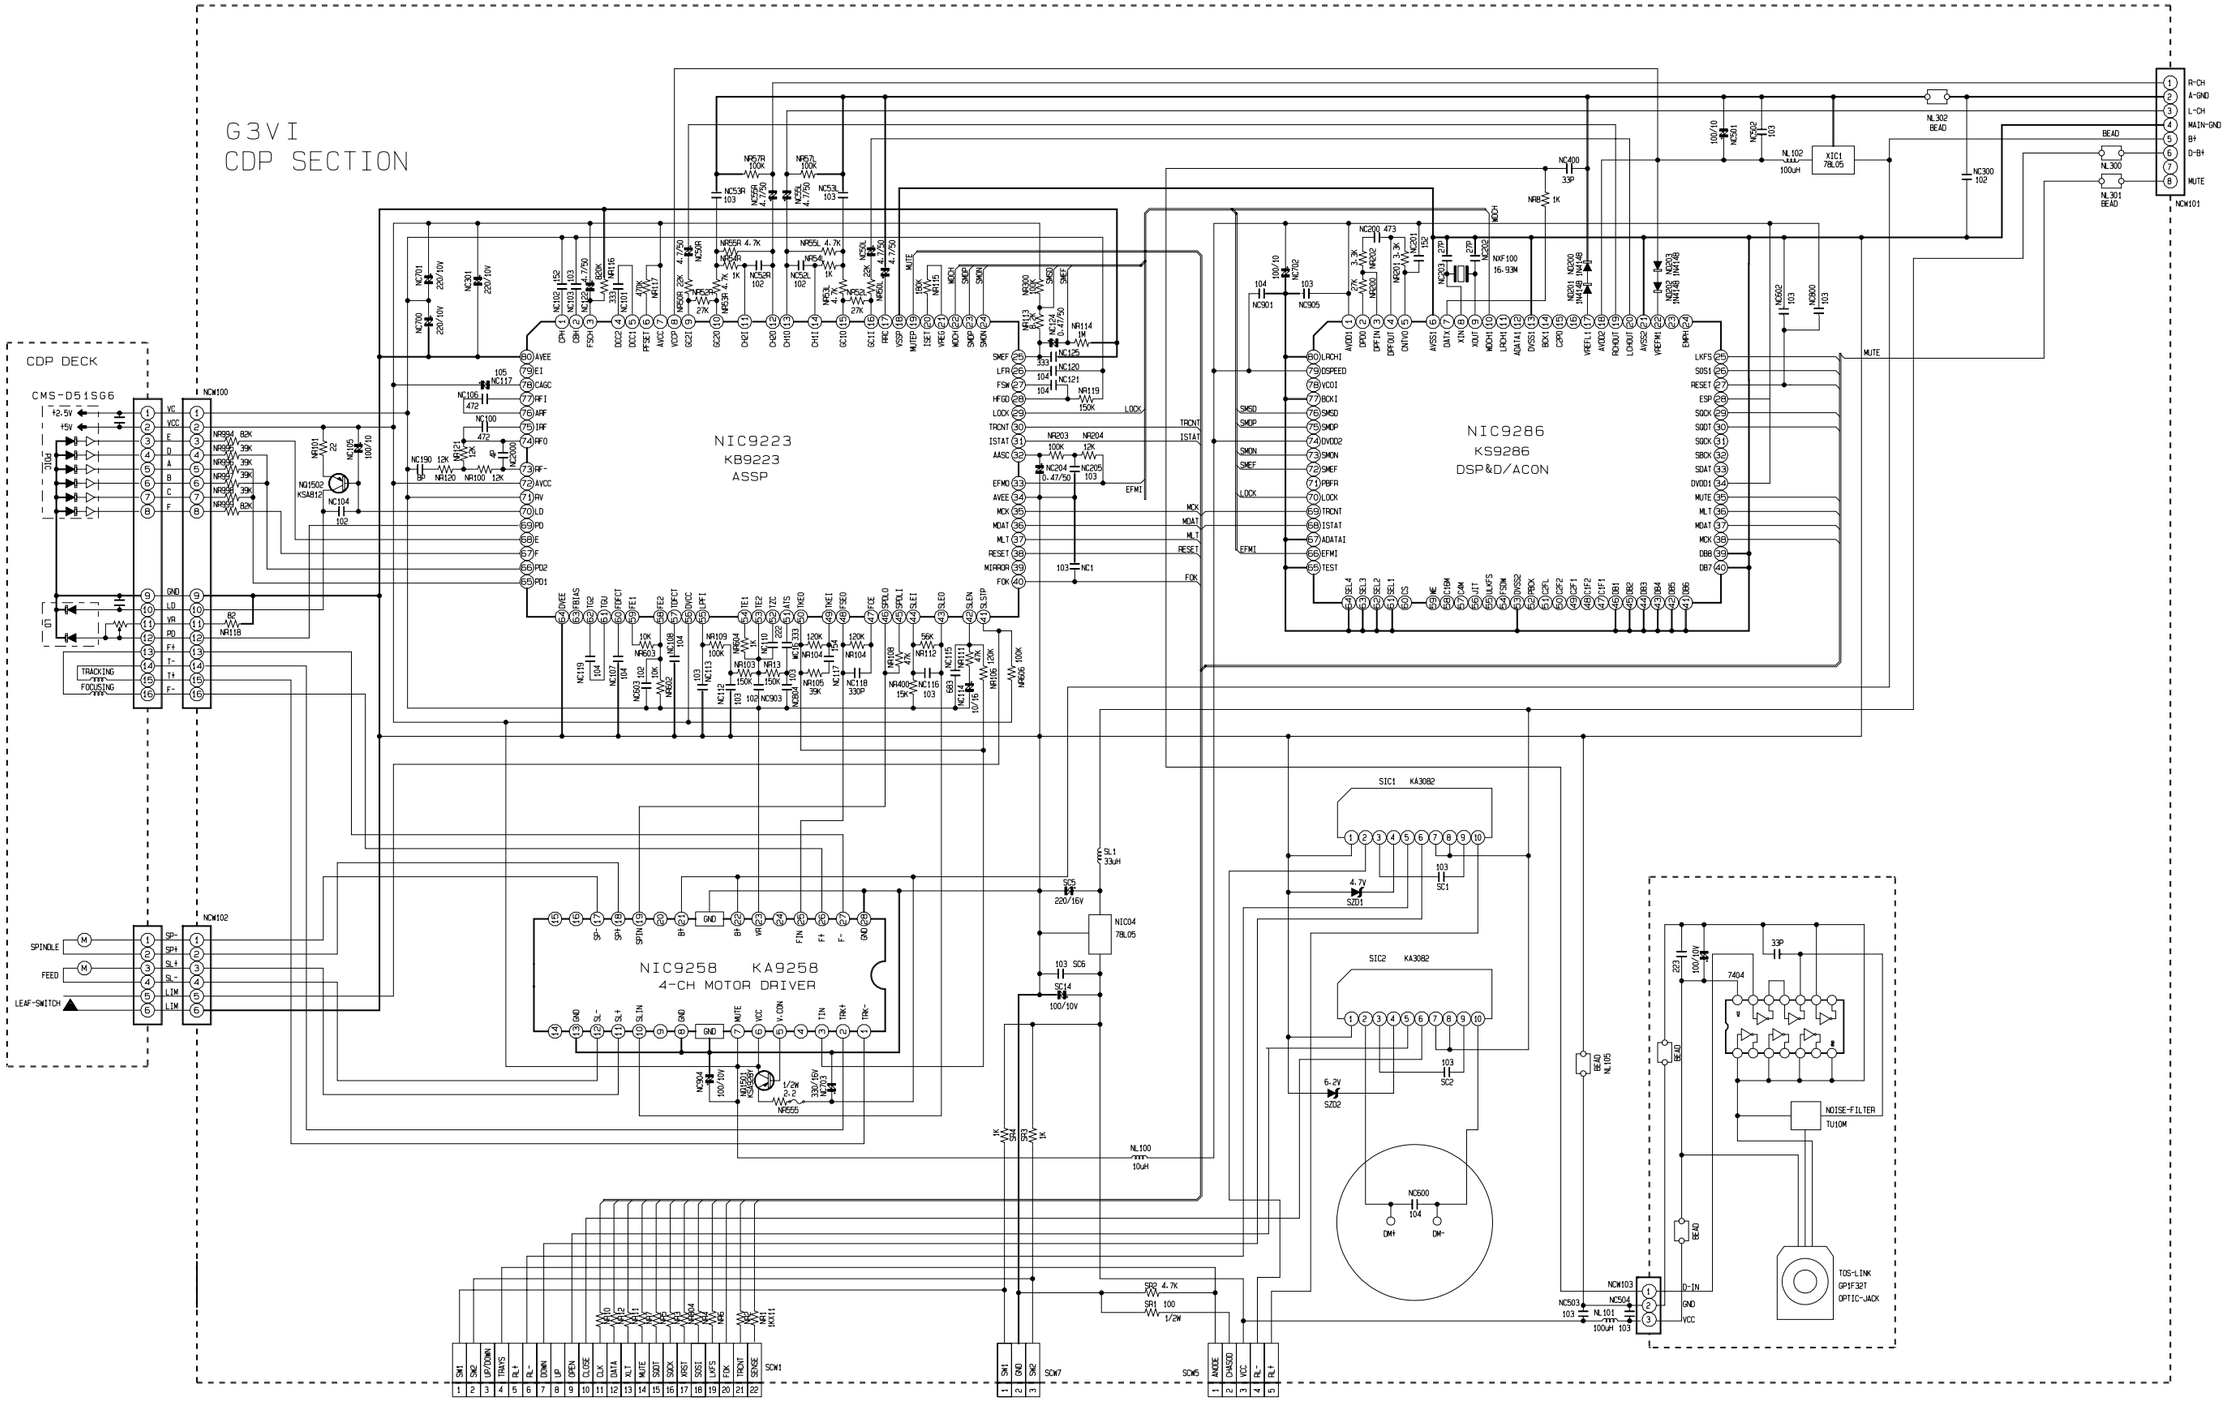

7-2 MAIN Part 1(Only MAX900)

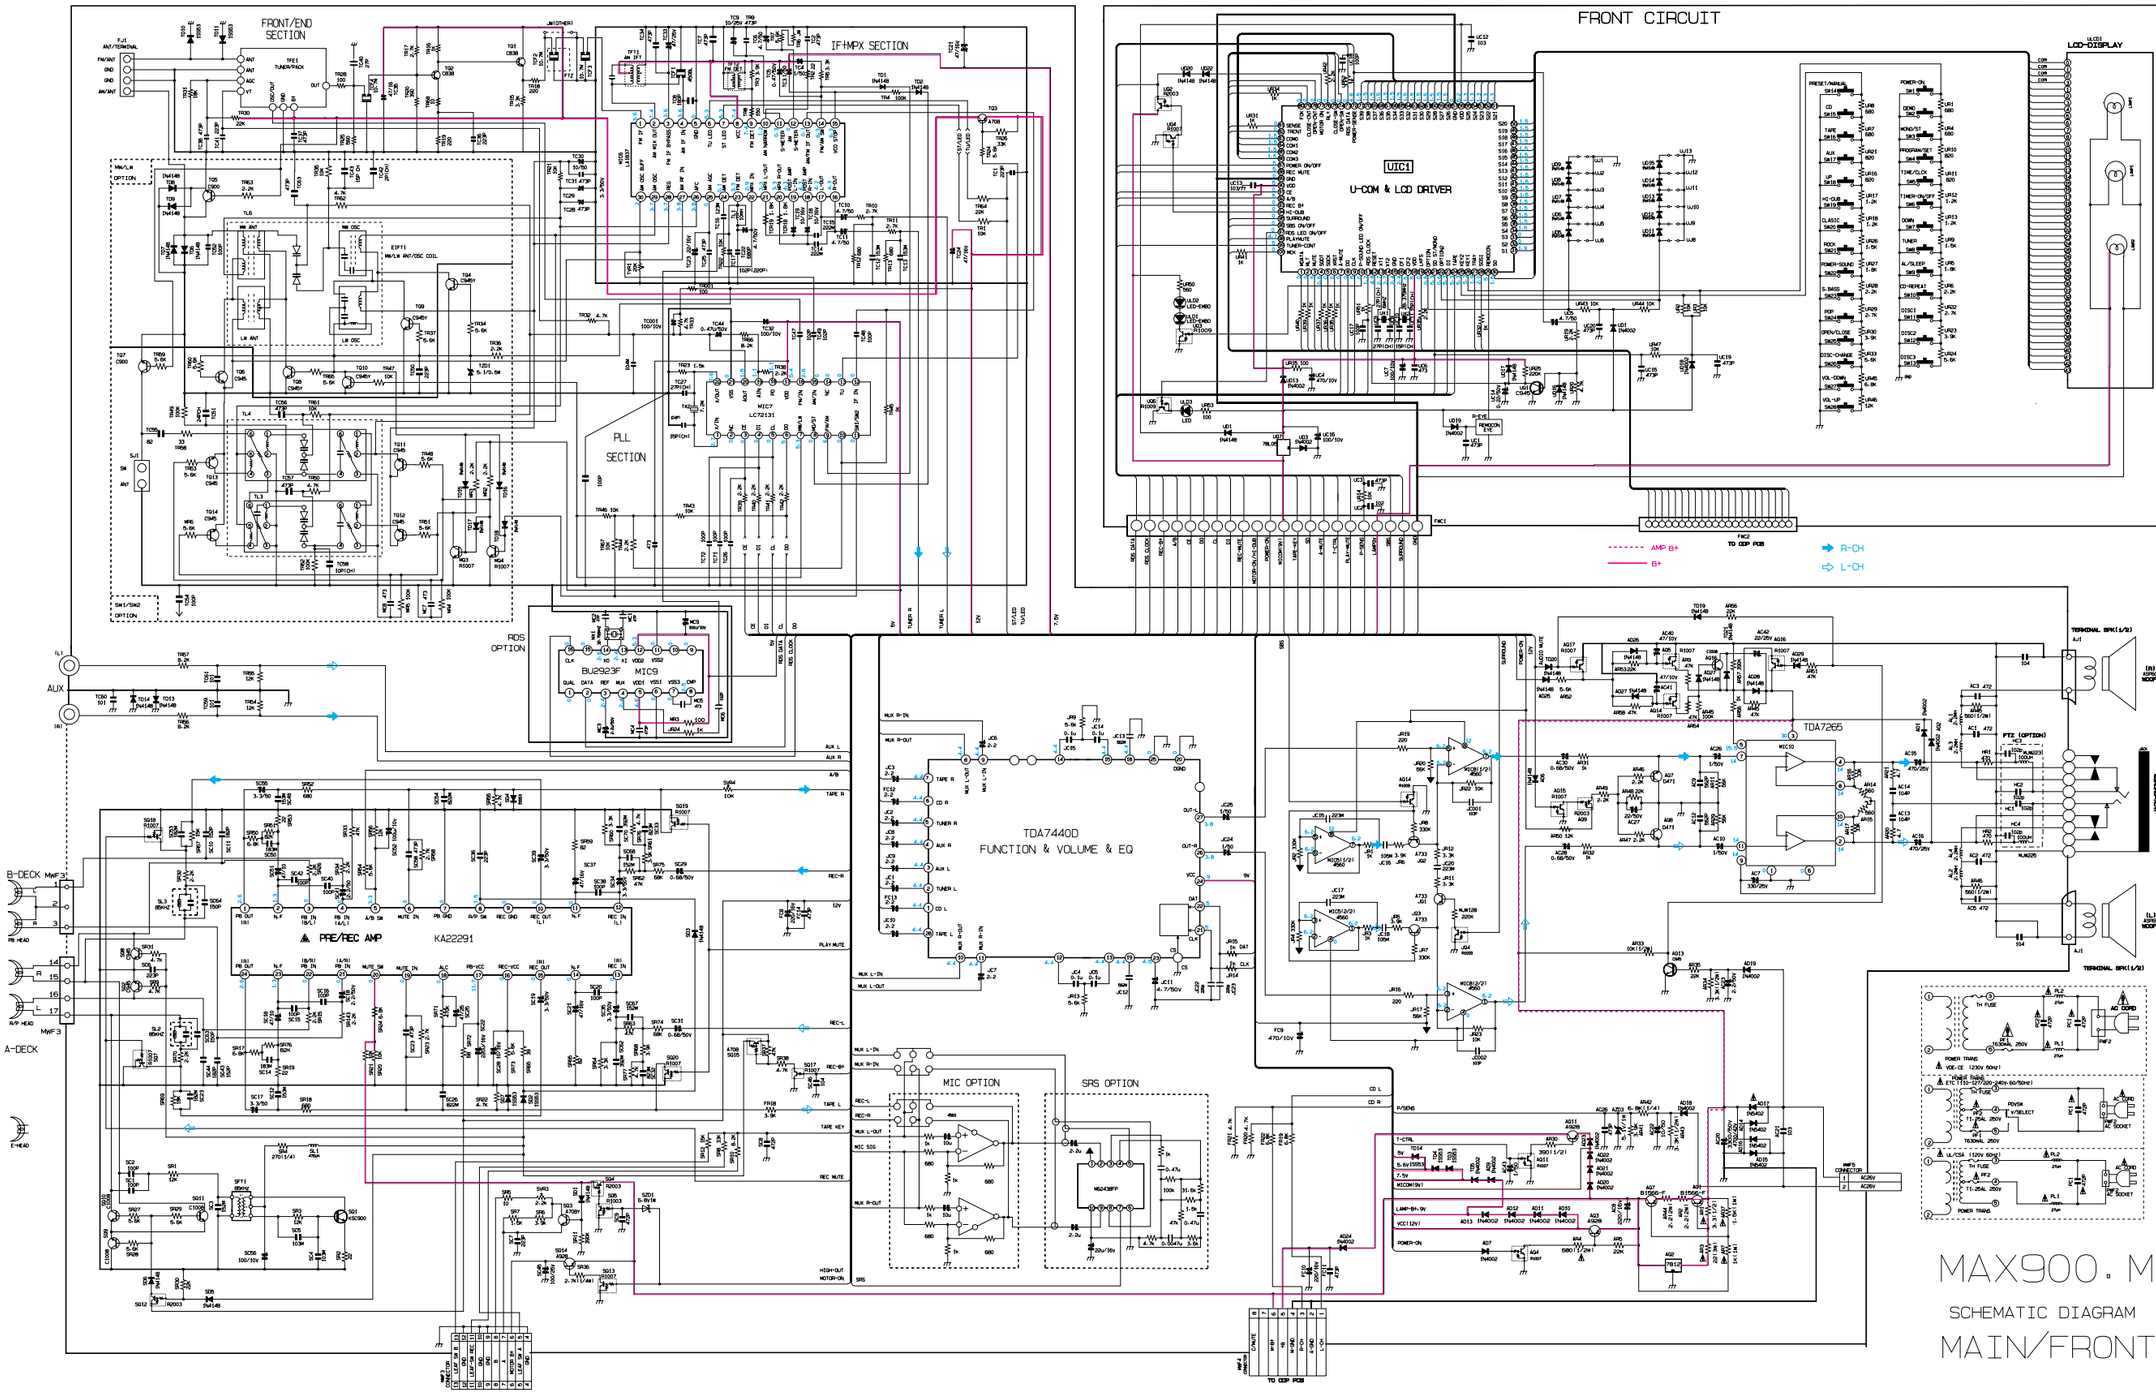

7-3 Main Part 2(Only MAX920)

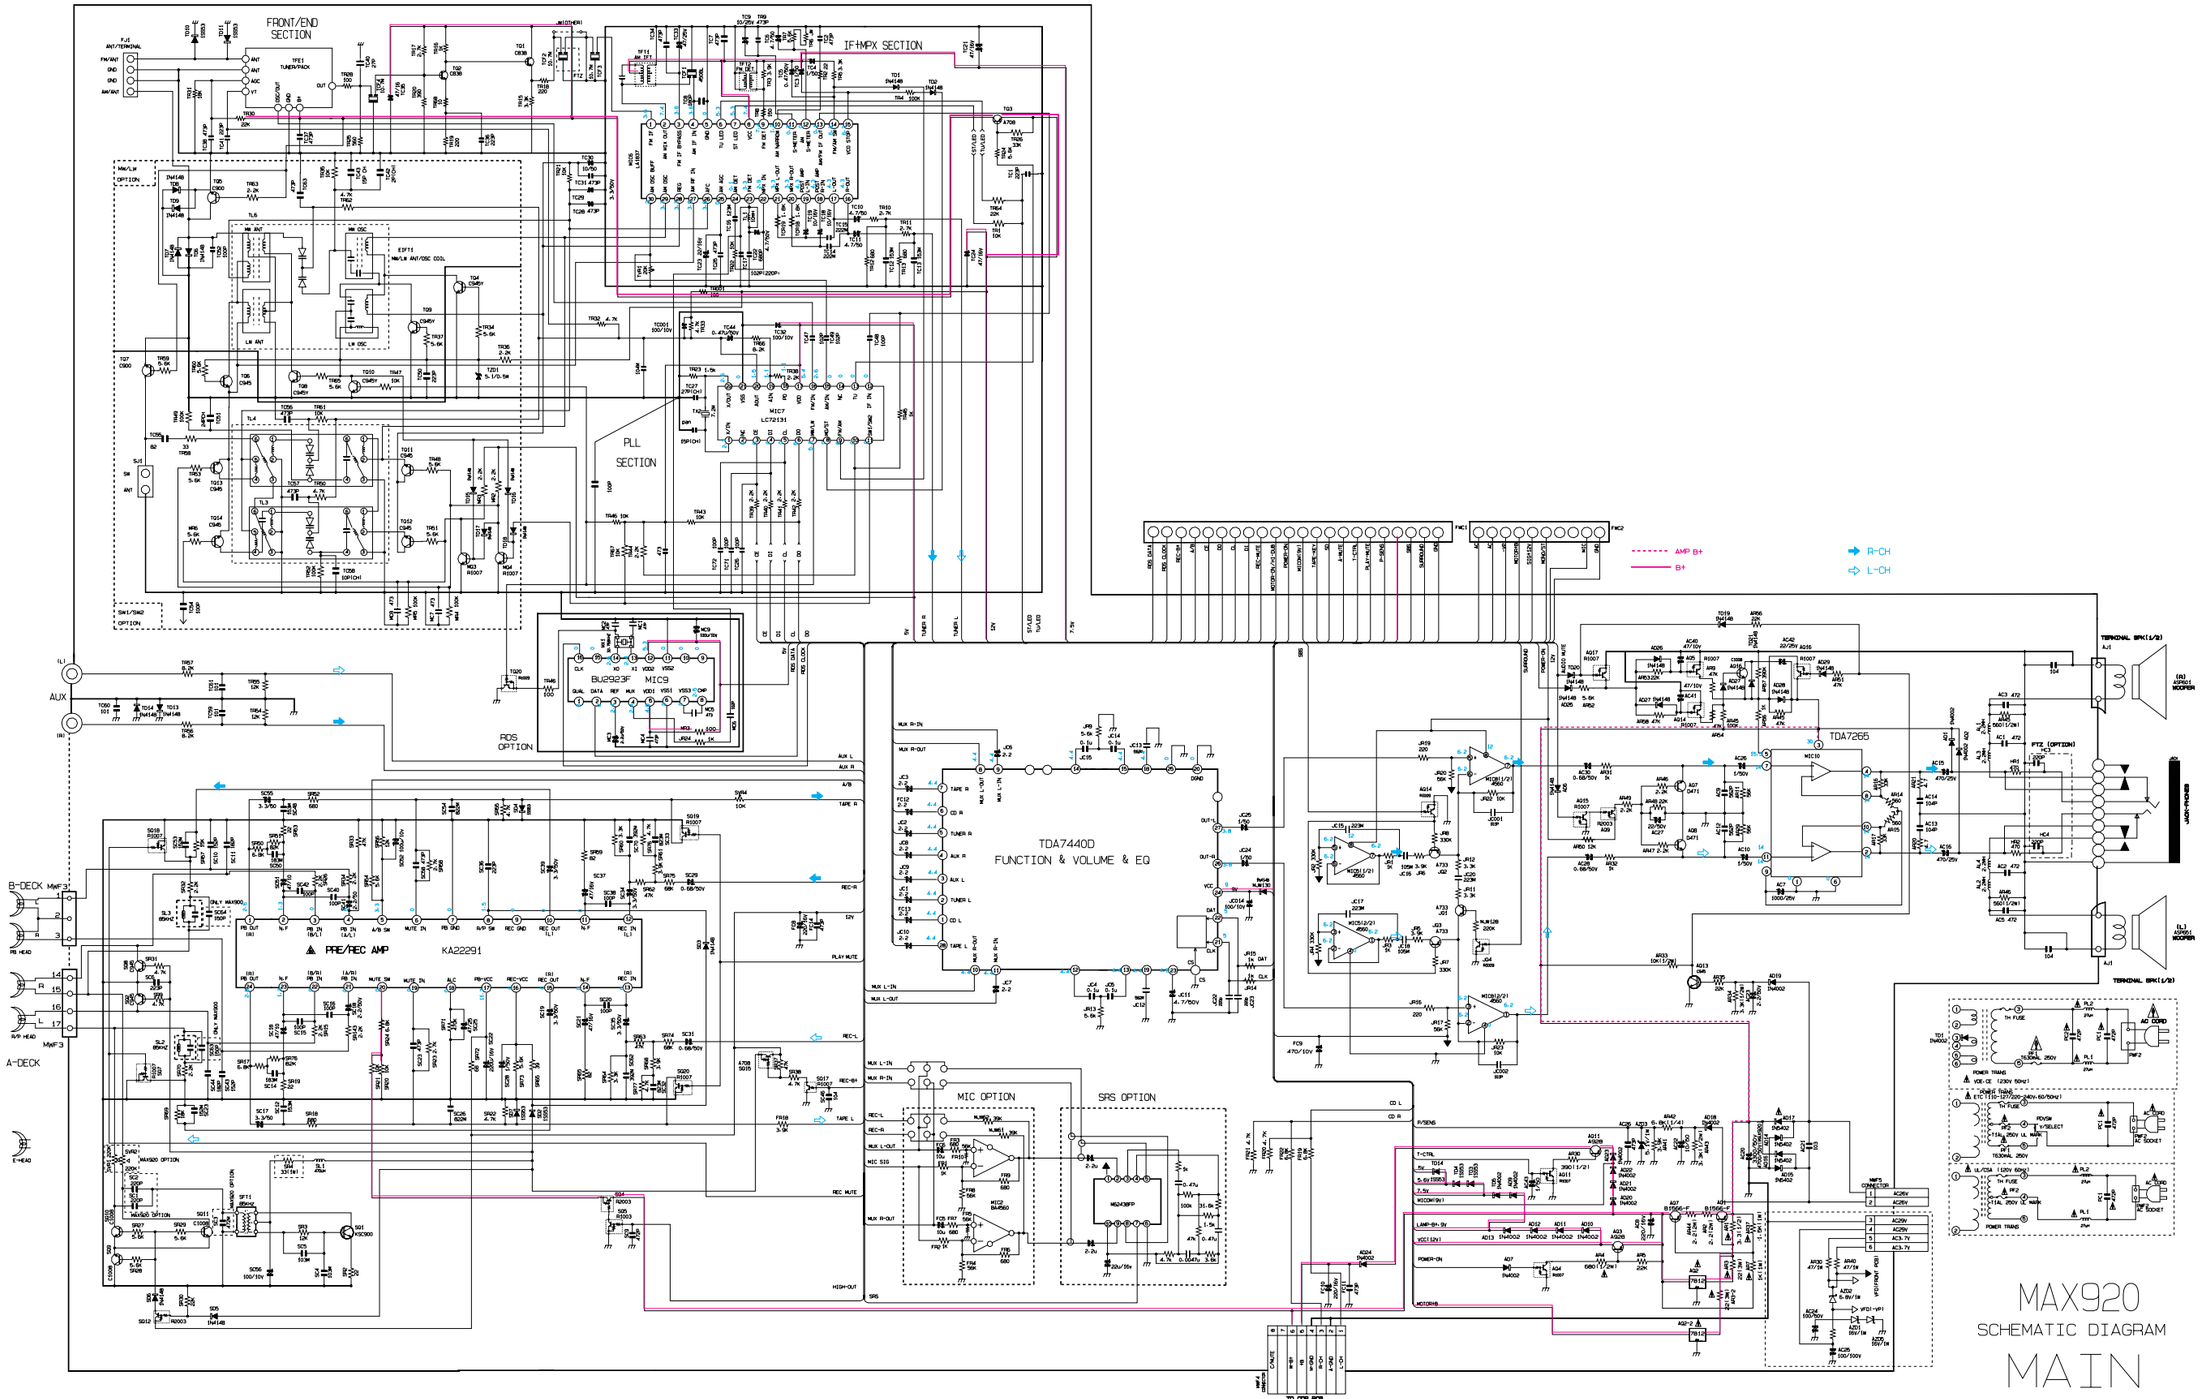
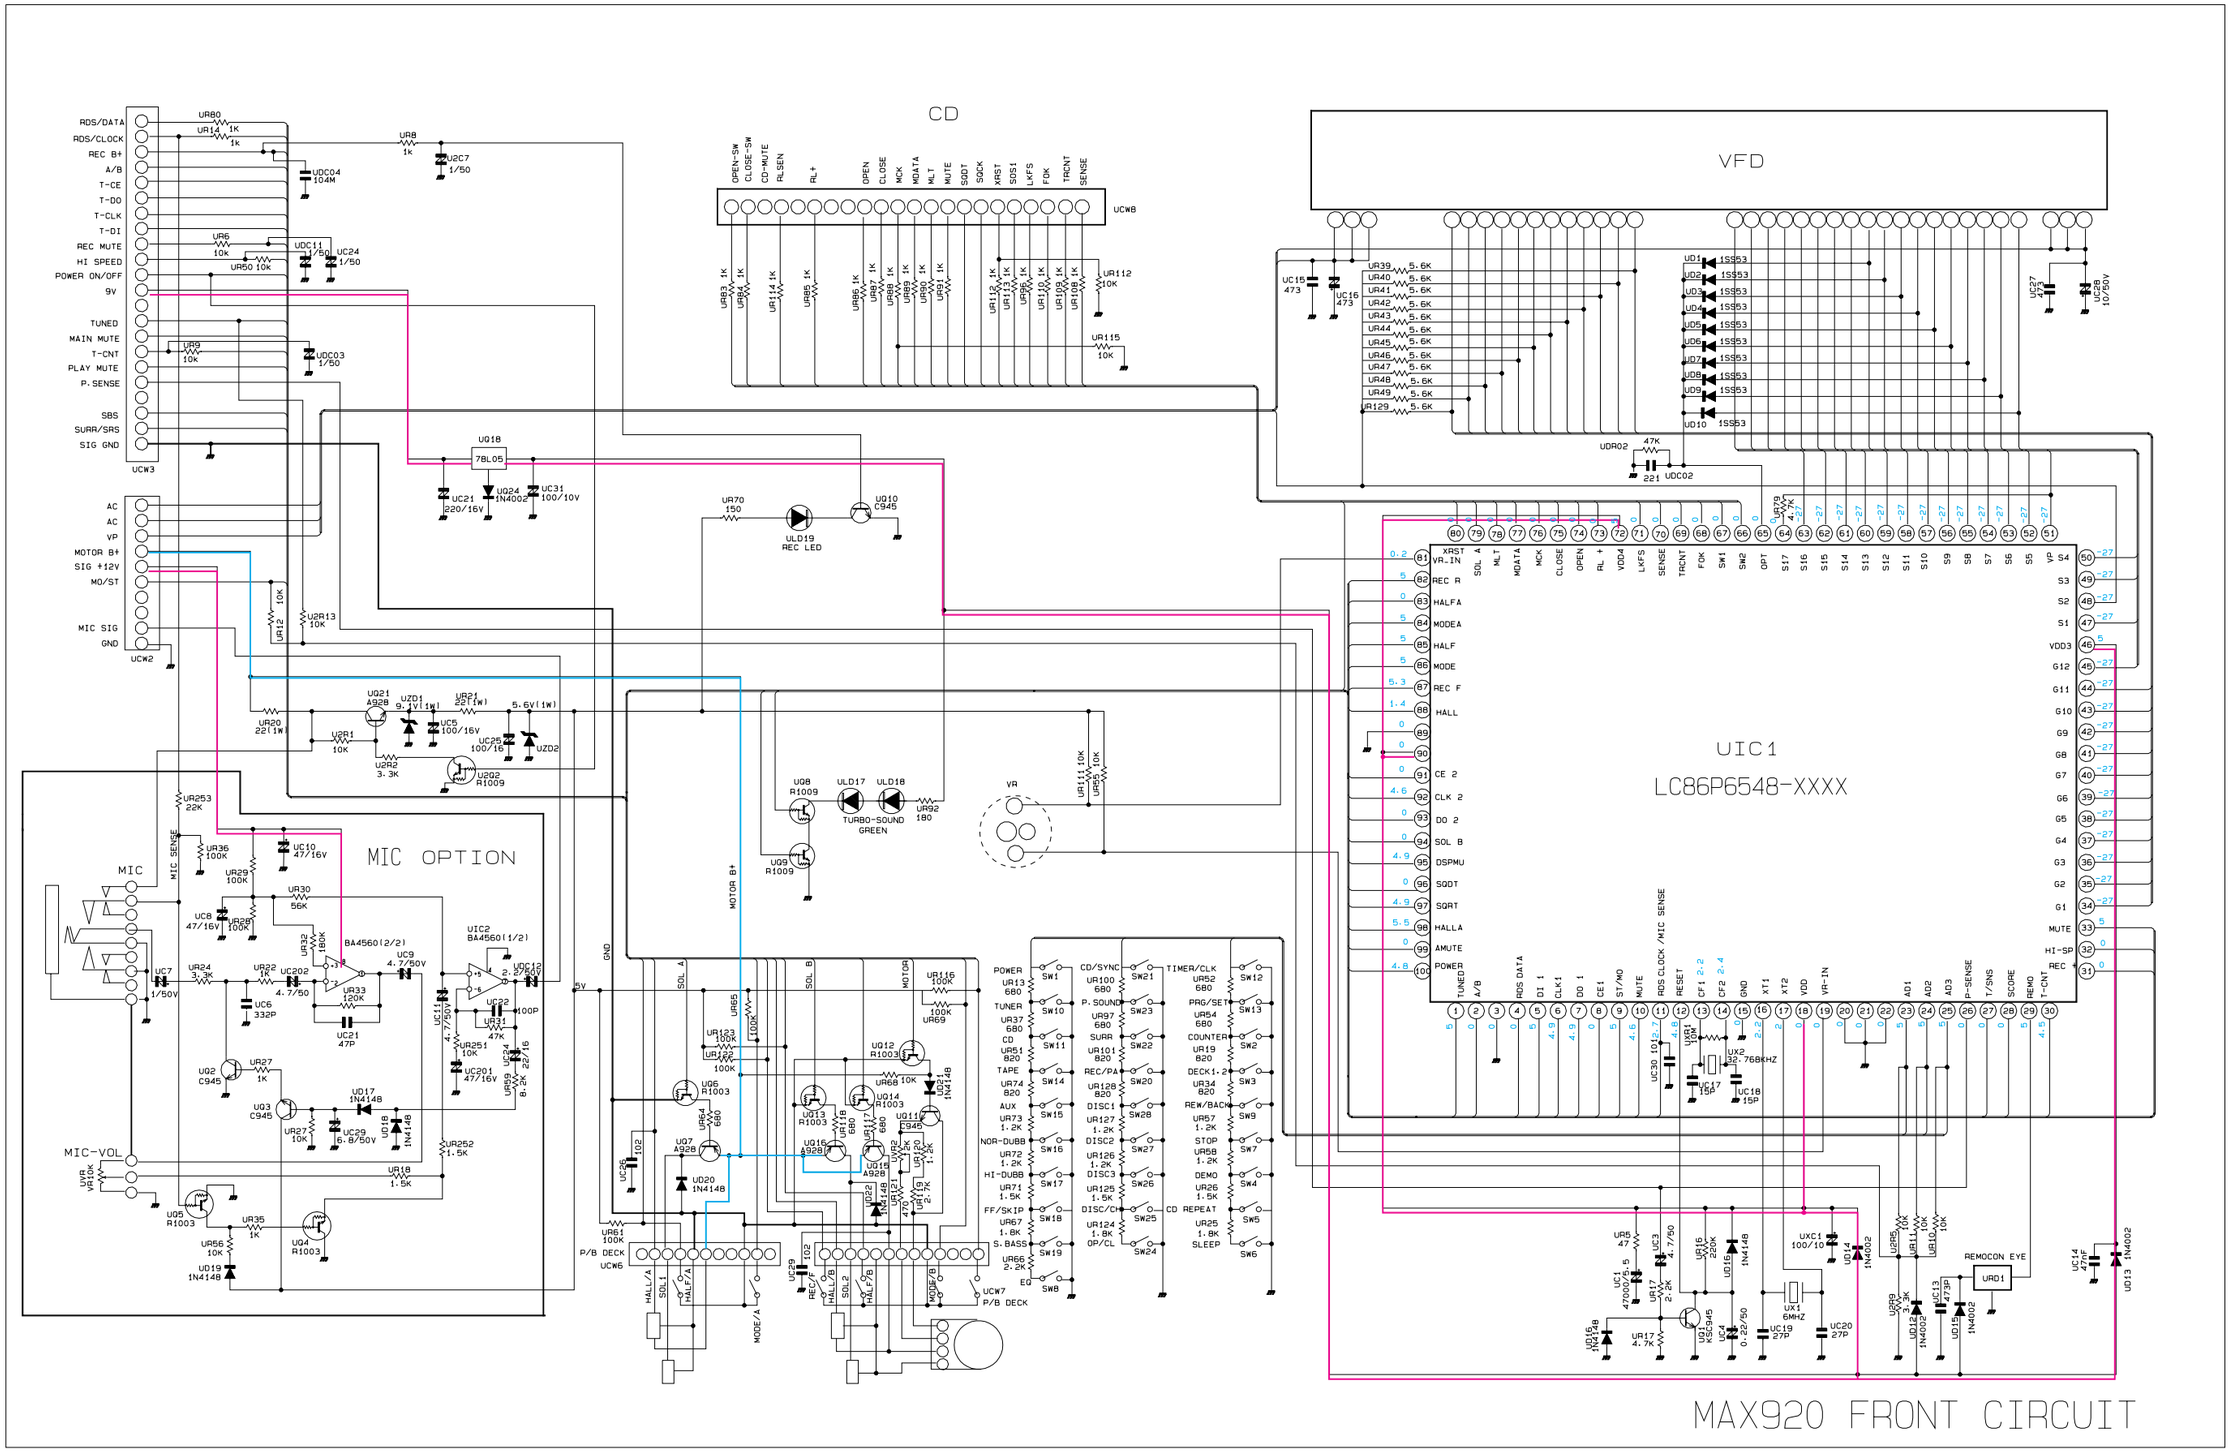
7-4 FRONT(Only MAX920)